FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Latter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.


	FOR INSURANCE COMPANY USE									
BUILDING OWNER'S NAME GORY ALAN	POLICY NUMBER									
STREET ADDRESS (Including Apr 8/2 AM SER	COMPANY NAIC NUMBER									
OTHER DESCRIPTION (Lot and B	llock Numbers, etc.)		MARCO BEACH	ו אנאט ו	EN					
CITY MARCO ISL				STATE FLORION						
	SECTION B F	LOOD INSURA	NCE RATE MAP (FIRM)	INFORMATION						
Provide the following from the proper FIRM (See Instructions):										
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	8. BASE FLOOD ELEVATION (in AO Zones, use depth)					
120067	. 0812	E	AUG 3.1992	AE	11.0					
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: I feet NGVD (or other FIRM datum—see Section B, Item 7).										
SECTION C BUILDING ELEVATION INFORMATION										
of	NGVD (or other FIF VE, and V (with BFE) Is at an elevation of least an elevation of least an elevation of least an elevation of least an elevation as the reference and action to the build ordance with the computum system used in elevation system used in elevation elevation is based on: Least an elevation is complete the elevation is elevation.	TM datum—see The bottom The bottom das the refere diacent to the learne level fro ding. If no floor munity's floody determining the elevation datu rent the elevation actual constitution of the building during to	esction 8, Item 7). Good the lowest horizontal state of the lowest horizontal state of the lowest horizontal state of the lowest from the selected diagram is discontinuously and depth number is available above reference level elem used in measuring the construction construction construction is construction to the course of construction the course of construction is the course of construction.	ructural member RM datum—see S ad diagram is ille, is the building ace? Yes evations: NG elevations is diffused on the FIRM on Page 4) drawings are reference leve A post-constru	editon B, Item 7). Lifeet above or above or below (check y's lowest floor (reference No Unknown VD '29 Other (describe erent than that used on If and show the conversion					
3ection 6, item /).					3/17/2/					
			COMMUNITY INFORMAT		to the second second second					
ie not the "lowest floor"	as defined in the con ordinance is: LLLL	nmunity's flood	plain management ordina t NGVD (or other FIRM da	ucs, ins sievano	indicated in Section C, Item 1 n of the building's "lowest n B, Item 7).					
FEMA Form 81-31, AUG	96 REPLACE	S ALL PREVIOUS	EDITIONS .	SEE 1	REVERSE SIDE FOR CONTINUATION					

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community Issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

STEPHEN A. HIGGINS. T	II.	L	ENUMBER (or Affix S 5194		
LAND SURVEYOR & MAP		MARO I	SLAND L	AND SU	EVEYOR 71P
ADDRESS ZAHITI ROAD		MARCO IS	LAND		FC. 34145
STGNATURE)		OCTOBER	DATE 20,1998	94-1-	389-2385
Coples should be made of his Certificat	e for: 1) (community official, 2) in	surance.agent/	company, and	3) building owner.
			* .	15	
COMMENTS:	7.9			μŽ	
and the second s	9		#	2	
	9		11	# 1	
			**	47	
				340	06.

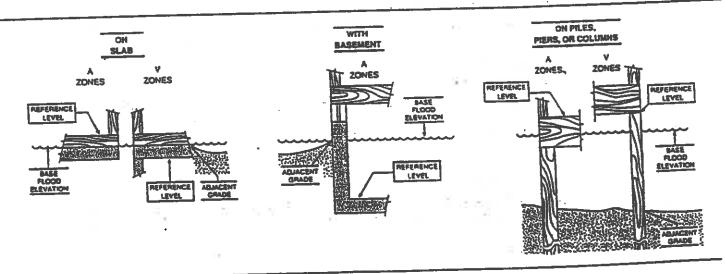

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

र्वत्वतः अनुस्कृतस्योतं ज्ञातः स्वयम् सुरुष्टम् स्वर्ते ते वि

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.