F 44- 2818

ELEVATION CERTIFICATE

O.M.B. No. 3067-007 Expires July 31, 1999

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are no required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME SETTAE / YUKBEL	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.) L · 23 BCK . 790 MECO BENCH C/- 25	•
MARIO ISAMO FL STA	TE ZIP CODE
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMA	ATION
Provide the following from the proper FIRM (See Instructions):	And the second s
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM: 120426 08/2 5 6 6 8 3 5 4 5	ZONE 6. BASE FLOOD ELEVATION (in AO Zones, use depth)
	10.0
 Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): KINGN For Zones A or V, where no BFE is provided on the FIRM, and the community has established a the community's BFE: Indicate the IRM (or other FIRM datum—see Section B, Item 7) 	BFF for this building site indicate
SECTION C BUILDING ELEVATION INFORMATION	
 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the sof	mber of the reference level from see Section B, Item 7). Is feet above or feet above or below (check ilding's lowest floor (reference s No Unknown NGVD '29 Other (describe sedifferent than that used on
the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the I equation under Comments on Page 2.)	different than that used on FIRM and show the conversion
1. Elevation reference mark used appears on FIRM: Yes 📈 No (See Instructions on Page 4)	
5. The reference level elevation is based on: 🗘 actual construction 🗌 construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference case this certificate will only be valid for the building during the course of construction. A post-conswill be required once construction is complete.)	level floor in place, in which struction Elevation Certificate
S. The elevation of the lowest grade immediately adjacent to the building is: \(\begin{align*}	GVD (or other FIRM datum-see
SECTION D COMMUNITY INFORMATION	
If the community official responsible for verifying building elevations specifies that the reference level is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the start of construction or substantial improvement6 - 28 - 99	ation of the building's "lowest

		\$ \$	6 4
			ø

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features–If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

		i- Contitionto f	or: 1) community of	ficial 2) insu	rance agent/com	npany, and 3) building	owner.
SIGNATURE					DATE 8 9-95	PHONE 941.353	0035
ADDRESS	15 PAYE	LIW	CAD IES	FL	34120		
PS & M	: V.P.	ROBINO	// 6 ~	ou I		STATE	ZIP
CERTIFIER'S N	~ / /	Oc1 #3	480 CB 5	982			
				LICENSE	NUMBER (or Affix Sea	1)	

COMMENTS: BEKKH MARK RASE FL. DEPT. of LATURAL RESOLUCES

BUY. LXIDEZ COXIST

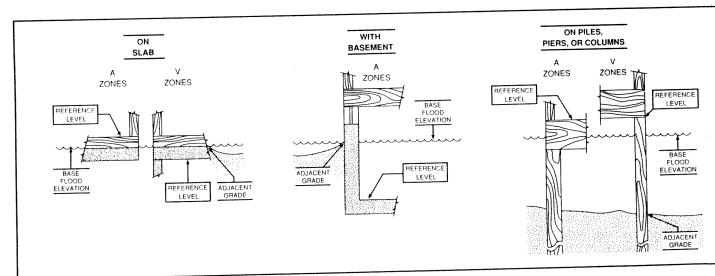

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

		b