ELEVATION CERTIFICA . 2

58045800000

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

96-6509

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR) Instructions for completing this form can be found on the following pages.

***************************************				5 F-8	,00.
		FOR INSURANCE COMPANY USE			
STLAMA (POLICY NUMBER			
STREET ADDRESS (Including A)		COMPANY NAIC NUMBER			
OTHER DESCRIPTION (Lot and	Block Numbers, etc.)				
Lot #18 B/	ock 384",	Marco Bo	each U-12, 1	Plat Book	6, pgs. 87-91
Collier Cou	inty.			STATE F/	ZIP CODE 3 4-120
	SECTION B FI	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	<u> </u>
Provide the following from t					
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
120067	0803	E	2/16/95	AE	11.00
7. Indicate the elevation dat 8. For Zones A or V, where the community's BFE:	no BFE is provided o	n the FIRM, an	d the community has esta	ablished a BFE fo	Other (describe on back) r this building site, indicate
			NG ELEVATION INFORM		
of	anding's reference level AE, AH, and A (with Est NGVD (or other FIR VE, and V (with BFE). Is at an elevation of BFE). The floor used the highest grade ad floor used as the reference adjacent to the building rdance with the committee system used in detail (NOTE: If the est, Item 7], then converts on Page 2.)	M datum—see of M datu	of the reference level floo Section B, Item 7). If the lowest horizontal strands feet NGVD (or other FIR ace level from the selected wilding. In the selected diagram is depth number is available ain management ordinance above reference level element of the element of the datum system used in the datum system used.	r from the selecter outural member of M datum—see Sed diagram is	d diagram is at an elevation If the reference level from ction B, Item 7). I feet above or ove or below (check lowest floor (reference No Unknown other (describe cent than that used on
5. The reference level eleva (NOTE: Use of construc- case this certificate will or will be required once cons	ation is based on: X tion drawings is only vally be valid for the bui	actual constructual actual constructual actual construction actual actua	ction construction dra	awings:	og for pace, in which on Elevation Certificate
6. The elevation of the lowe Section B, Item 7).	st grade immediately	adjacent to the	building is:	le feet NGVD (c	or other FIRM datum-see
	SE	CTION D CO	MMUNITY INFORMATIO	Ν-	
If the community official r is not the "lowest floor" as floor" as defined by the oral 2. Date of the start of constructions	s defined in the comm rdinance is:	unity's floodpla ∐.∐ feet N	in management ordinanc GVD (or other FIRM datu	e, the elevation of	icated in Section C, Item 1 (fine the building's "lowest ltem 7).


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features–If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Affix Seal)							
Mitchell B. Tho	m25011		957					
HILE	COMPAN		/3/					
Land Surveyor ADDRESS	Mirc 4	ell B. Tho.	Meson P.A.					
	CITY		STATE	ZIP				
255 IST. ST. N.W.			FL	34/20				
mithell min	There	DATE	PHONE (941) 352	-6077				
COMMENTS:								
COMMENTS:								
,								
		.•						
		*						

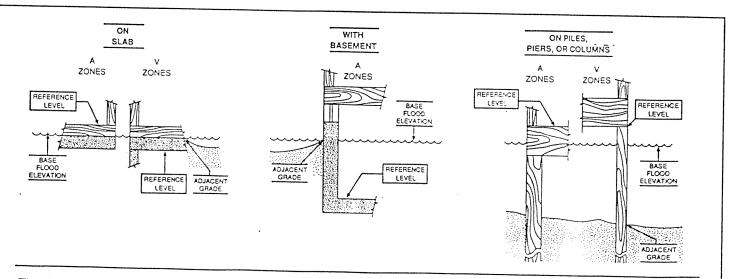

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.