994661

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

	FOR INSURANCE COMPANY USE											
BUILDING OWNER'S NAME	POLICY NUMBER											
STREET ADDRESS (Including Ap	COMPANY NAIC NUMBER											
OTHER DESCRIPTION (Lot and I	•	Maco L	Landmark 3c.H. O.T									
CITY MARCO 7	-S AUG			STATE	ZIP CODE							
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION												
Provide the following from the proper FIRM (See Instructions):												
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)							
120426	0812		8.3.92	A. A	1/							
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7).												
	SECTIO	NC BUILDI	NG ELEVATION INFORM	IATION								
of	t NGVD (or other FIRITE). Ite, and V (with BFE). Ite at an elevation of BFE). The floor used the highest grade adjusted as the reference adjacent to the building dance with the communication of the electric strains of the	The bottom of the bottom as the reference level from a line flood unity's floodplatermining the levation datumnt the elevation	Section B, Item 7). If the lowest horizontal strated feet NGVD (or other FIRmore level from the selected uilding. In the selected diagram is depth number is available ain management ordinance above reference level element of the element of the element of the datum system uses to the datum system uses	uctural member of M datum—see Set I diagram is I diagram	ction B, Item 7). J. lefeet above and check above abo							
4. Elevation reference mark 5. The reference level elevation (NOTE: Use of construction case this certificate will on will be required once cons	ion is based on: 4 to a drawings is only valid for the build	actual constructions alid if the build ding during the	ction construction dra	awings <i>reference level t</i>	Soor in place, in which on Elevation Certificate							
6. The elevation of the lowes Section B, Item 7).	st grade immediately a	adjacent to the	building is:	feet NGVD (or other FIRM datum see							
SECTION D COMMUNITY INFORMATION												
I. If the community official resistance is not the "lowest floor" as floor" as defined by the ore. 2. Date of the start of constru	defined in the commudinance is:	unity's floodpla	in management ordinanc GVD (or other FIRM datu	e, the elevation of	of the building's "lowest							


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

	•			•		·		
	CERTIFIER'S NAME	7	F ~ 100	LICENSE NU	MBER (or Affix S	eal)		
	DAS (AS	K. CATOU	5400		<u> </u>	<u> </u>	<u></u>	
	/ TITLE		COMP	ANY NAME	· ·			
	D.5.M. 8.W.	· 12	ROBIN	EHE ! C	470c1 -L	.44		
	ADDRESS 3/1265	1 ST AVE	W.U.	LAPLES	FC	3412	STATE	ZIP
2	SIGNATURE			DA	TE 3-21-6	PHONE	941.353-0	0085
	Coples should be in	ade of this Certificate fo	or: 1) community	official, 2) insura	nce agent/co	ompany, ar	nd 3) building ov	vner.
•	COMMENTS: B	EUCH MAEIC	139SE	COlliez	12			
	BUSG.	SITE	(JUB) (2)	COUSTRU	دراهدا			
•								·
	· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·	·		<u></u>			
							· 	
					·			
			-	·				······································

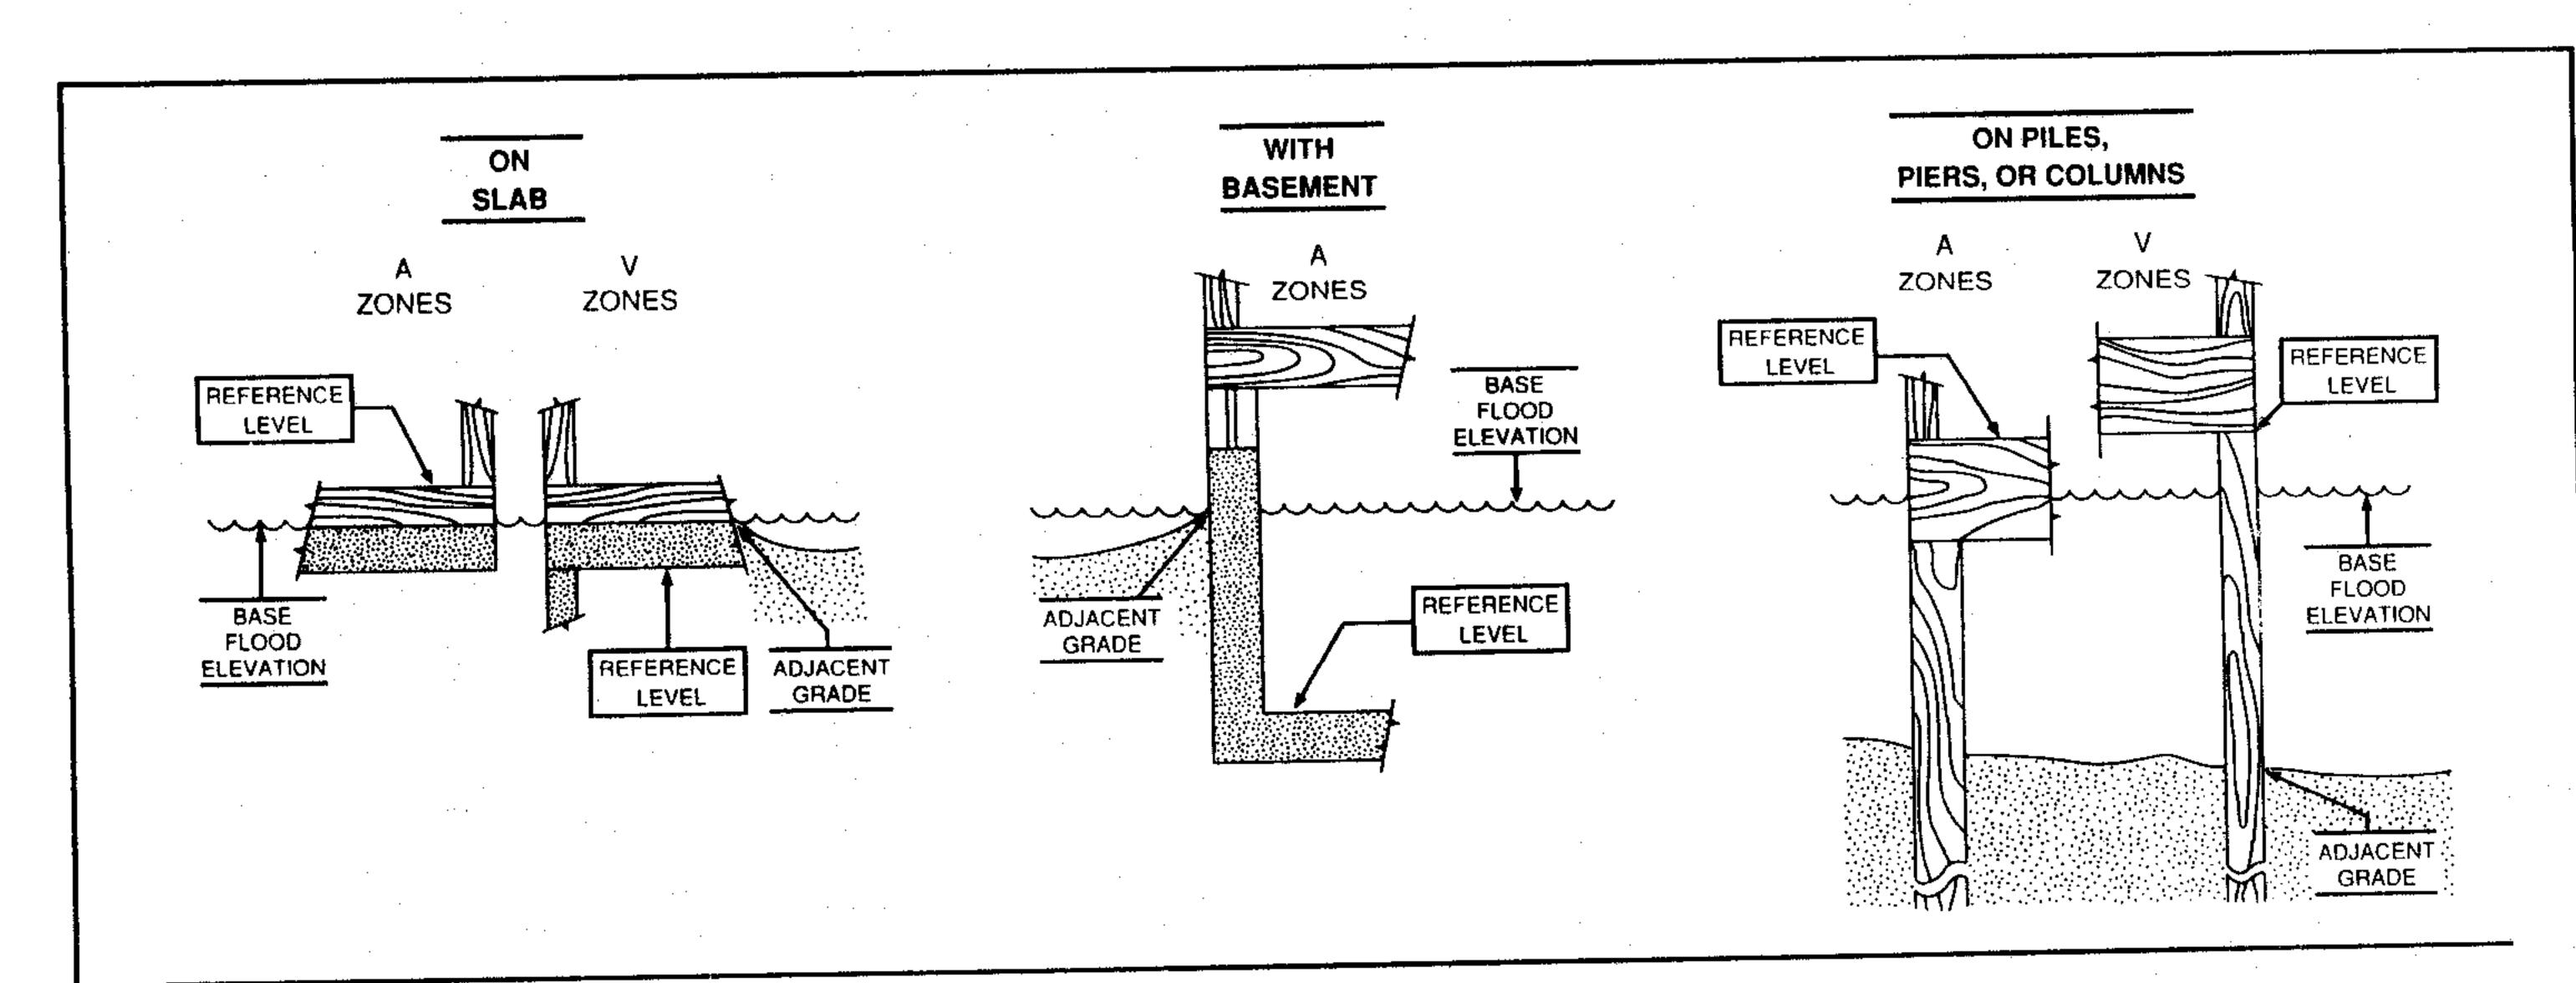

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.