ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form. Instructions for completing this form can be found on the following pages.


SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME					POLICY NUMBER
H. Douglas & Mary Moss					
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER					COMPANY NAIC NUMBER
459 Nassau C			<u></u>		
OTHER DESCRIPTION (Lot and B		oach IIni	+		
Lot 6, Block	86, Marco E	each on	. C J	STATE	ZIP CODE
Marco Island				FL	34145
Marco rand		OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	<u> </u>
rovide the following from t	ne proper FIRM (See	Instructions):		<u> </u>	
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION
	\sim \sim \sim	D	7/20/98	AE	(in AO Zones, use depth) $+10.0^{\circ}$
120426	0804				
. For Zones A or V, where	no BFE is provided o	n the FIRM, an	ase Flood Elevations (BFE) and the community has esta FIRM datum—see Section	ablished a BFE f	Other (describe on back) or this building site, indicate
	SECTION	ON C BUILDI	NG ELEVATION INFORM	IATION	
the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The one) the highest grade level) elevated in accomments on Pagenthe FIRM [see Section equation under Comments on Pagenthe	is at an elevation of BFE). The floor used the highest grade at floor used as the reference adjacent to the build ordance with the compared in a ge 2). (NOTE: If the B, Item 7], then converts on Page 2.)	d as the reference level from the level from the flood munity's flood pletermining the elevation dature et the elevation	feet NGVD (or other FIRmoe level from the selected diagram is depth number is available above reference level element or the datum system used in measuring the element of the datum system uses to the datum system uses to the datum system uses the datum system system system uses the datum system sy	M datum—see S d diagram is e, is the building ce? Yes evations: X NG elevations is different sed on the FIRM	
. Elevation reference mar					M, 0132
case this certificate will o	tion drawings is only fully be valid for the bu struction is complete.	valid if the buil uilding during th .)	ding does not yet have the ne course of construction.	e reterence level A post-construc	I floor in place, in which ction Elevation Certificate
5. The elevation of the lowers Section B, Item 7).	est grade immediately	adjacent to th	e building is:6	•9 feet NGVD	(or other FIRM datum-see
	S	ECTION D C	OMMUNITY INFORMATION	NC	
is not the "lowest floor" a	as defined in the comportance is:	munity's floodp	lain management ordinan NGVD (or other FIRM dat	ce, the elevation um–see Section	ndicated in Section C, Item 1 of the building's "lowest B, Item 7).


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

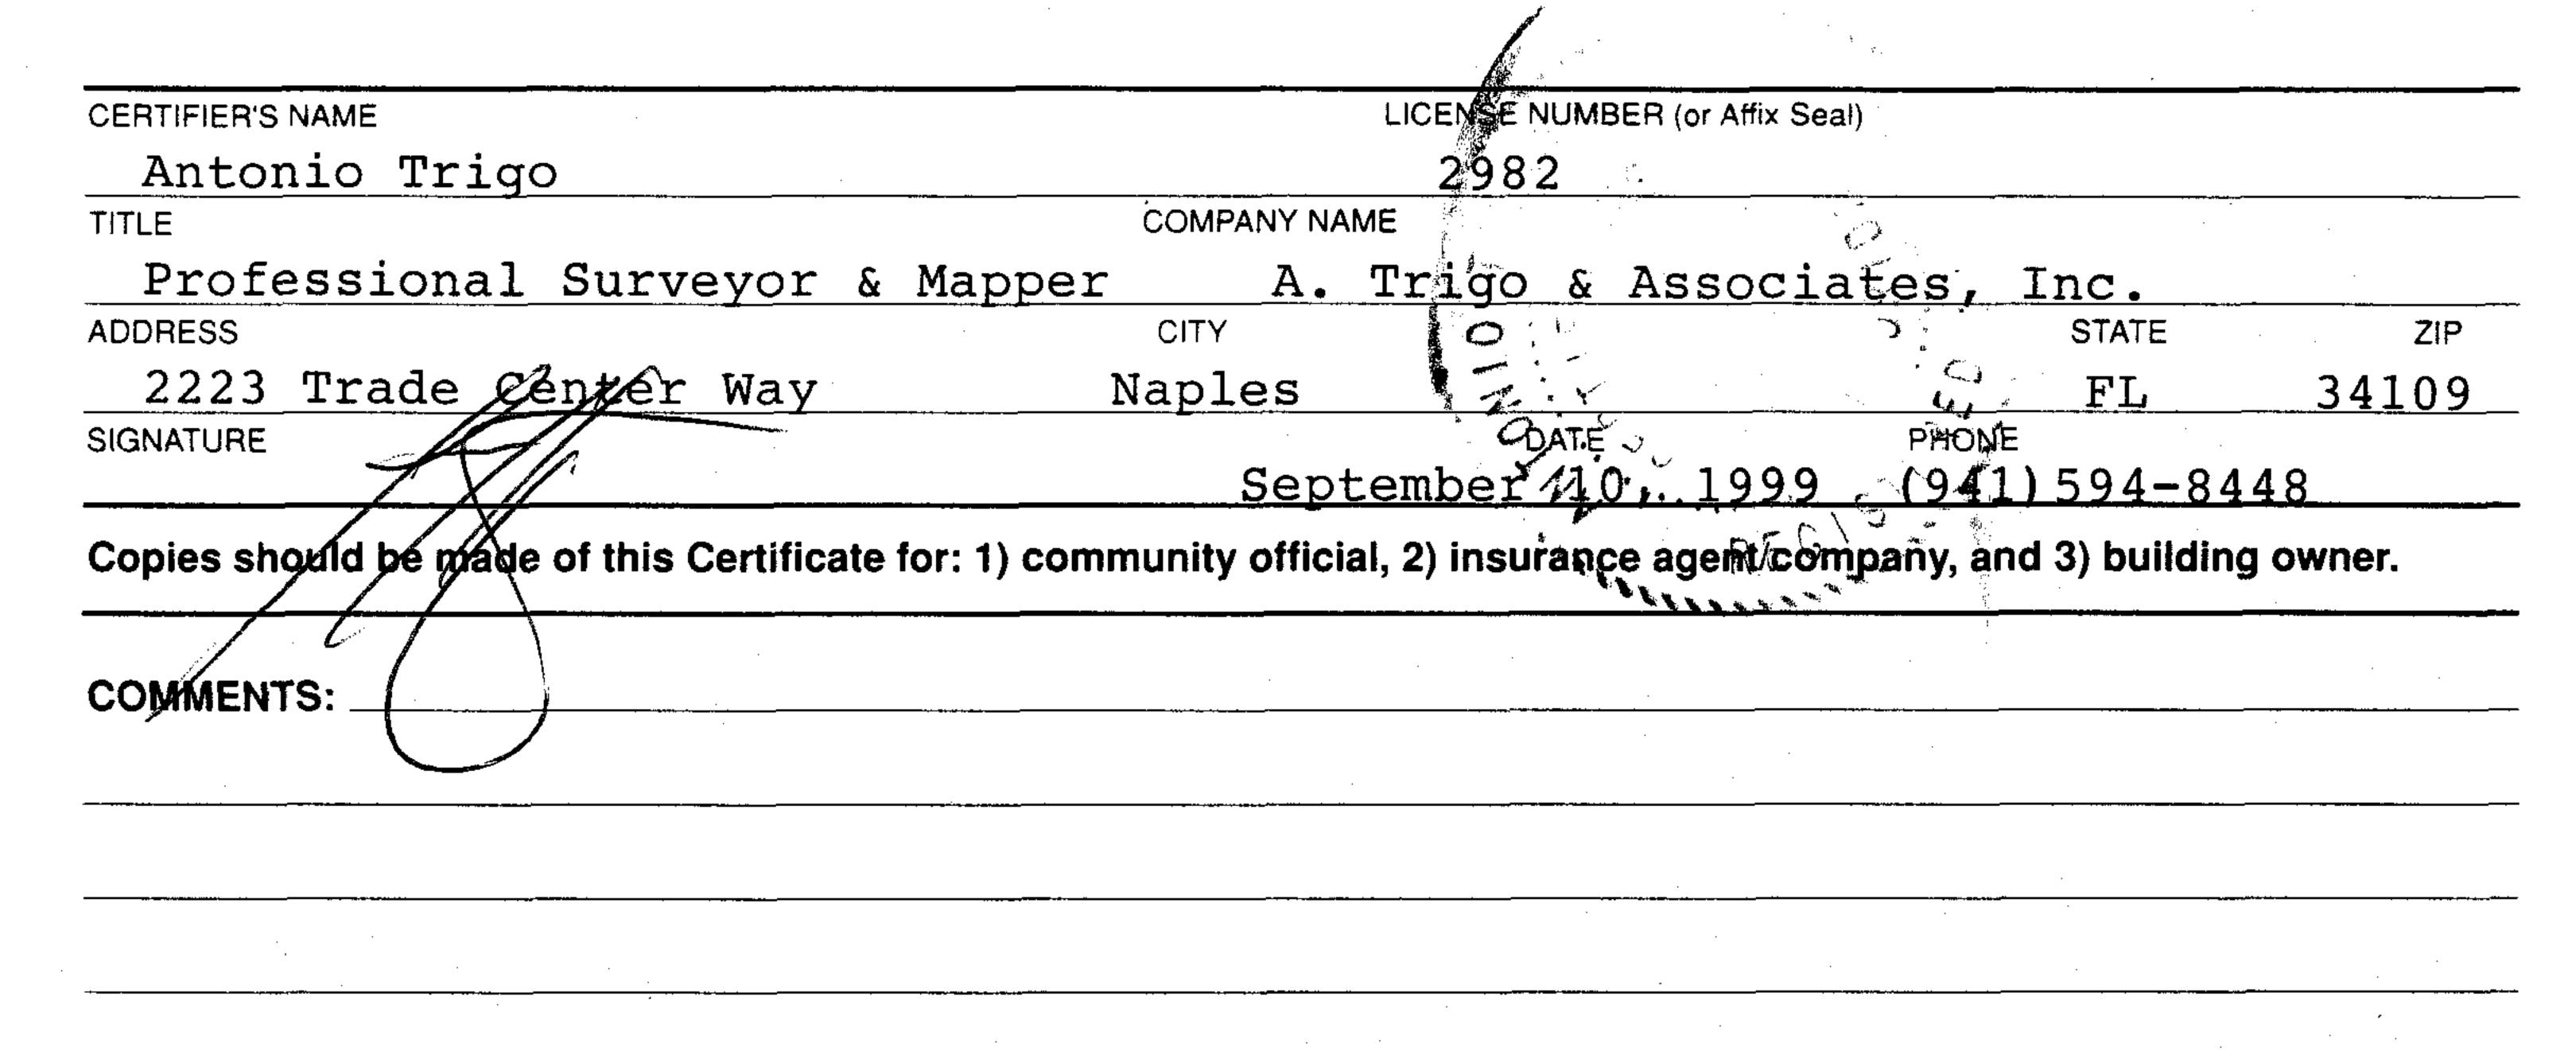

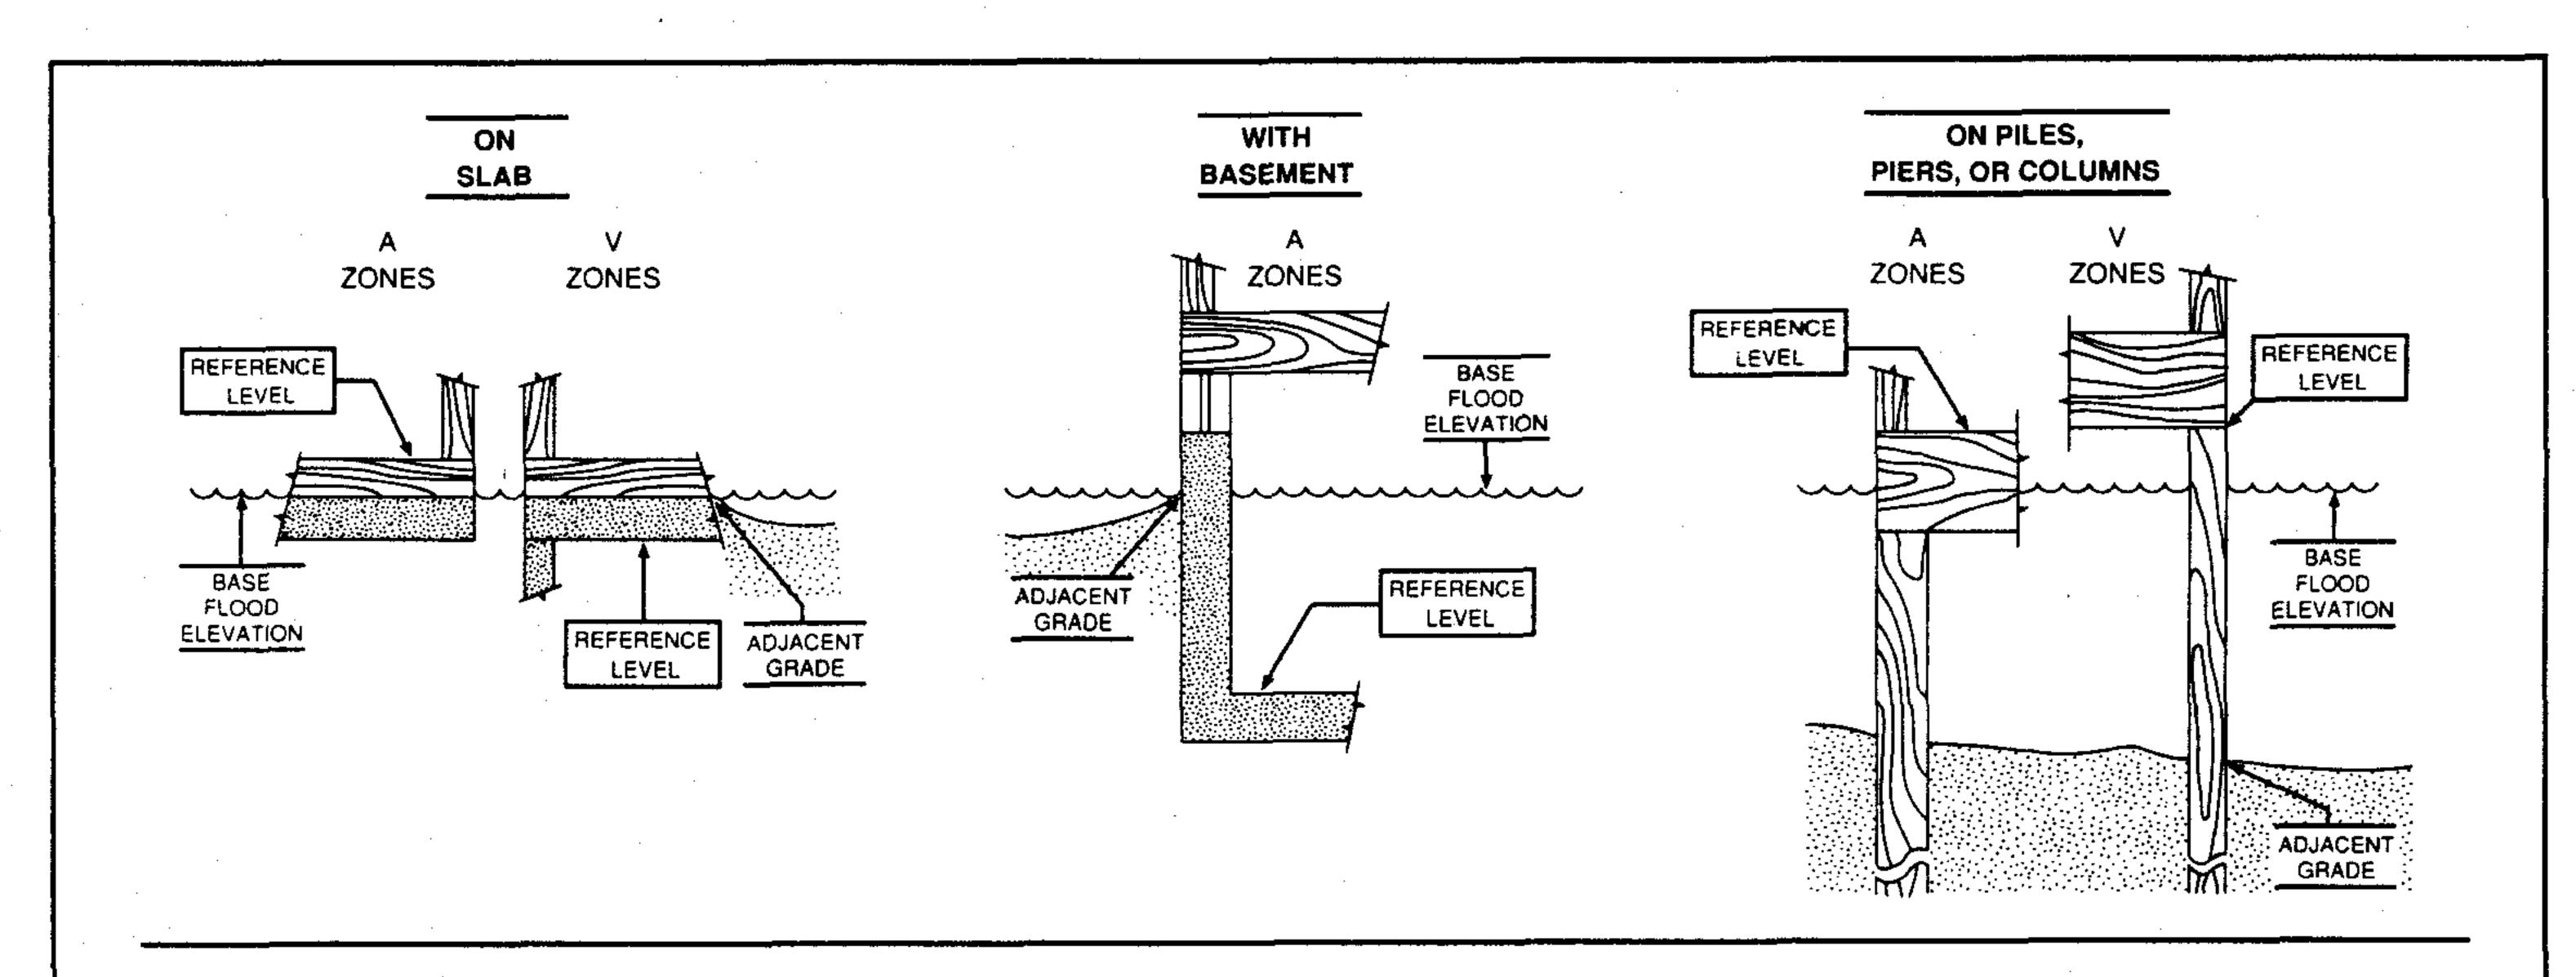

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.