## ELEVATION CERTIFICATE

O.M.B. No. 3067-0077 Expires July 31, 1999

SEE REVERSE SIDE FOR CONTINUATION

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME					POLICY NUMBER
Wayne Lukacsko STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER 1400 Quintara Court					COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.)  Lot 8, Block 315, Marco Beach Unit 9					9-3634
CITY  Marco Island  FL					ZIP CODE 34145
Marco Isla		OOD INSURA	NCE RATE MAP (FIRM)	······································	
Provide the following from the	he proper FIRM (See	Instructions):	·		
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
120426	0812	E	7/20/98	AE	+10.0 °
8. For Zones A or V, where	no BFE is provided or	n the FIRM, ar		ablished a BFE fo	Other (describe on back) or this building site, indicate
	SECTIO	ON C BUILDI	NG ELEVATION INFORM	ATION	
<ul> <li>(b). FIRM Zones V1-V30, the selected diagram,</li> <li>(c). FIRM Zone A (without below (check one)</li> <li>(d). FIRM Zone AO. The one) the highest grade level) elevated in accordance of the elevation day under Comments on Page the FIRM [see Section equation under Comments on Page 14. Elevation reference mark</li> </ul>	VE, and V (with BFE) is at an elevation of BFE). The floor used the highest grade additionable adjacent to the build ordance with the community of the element of the eleme	The bottom of as the reference level from the elevation daturn art the elevation.  RM: Yes	feet NGVD (or other FIF nee level from the selecter uilding. In the selected diagram is depth number is available above reference level element or the datum system used in measuring the element of the datum system used in See Instructions of the Contractions of the	ructural member  IM datum—see Sold diagram is  le, is the building tee?  Evations: Now Note the vations is different and the FIRM on the FIRM on Page 4)	feet above or  bove or below (check 's lowest floor (reference No Unknown /D '29 Other (describe
5. The reference level eleval (NOTE: Use of construct case this certificate will of will be required once constructions).	tion drawings is only the hole	valid if the build ilding during th	ding does not yet have the	e reference level	floor in place, in which
6. The elevation of the lower Section B, Item 7).	est grade immediately	adjacent to the	e building is: 6	.8 feet NGVD	(or other FIRM datum-see
	SE	ECTION D CO	OMMUNITY INFORMATION	)N	
is not the "lowest floor" a	s defined in the commordinance is:	nunity's floodpl	lain management ordinand NGVD (or other FIRM date	ce, the elevation um-see Section	

REPLACES ALL PREVIOUS EDITIONS


FEMA Form 81-31, MAR 97


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code Section 1001.

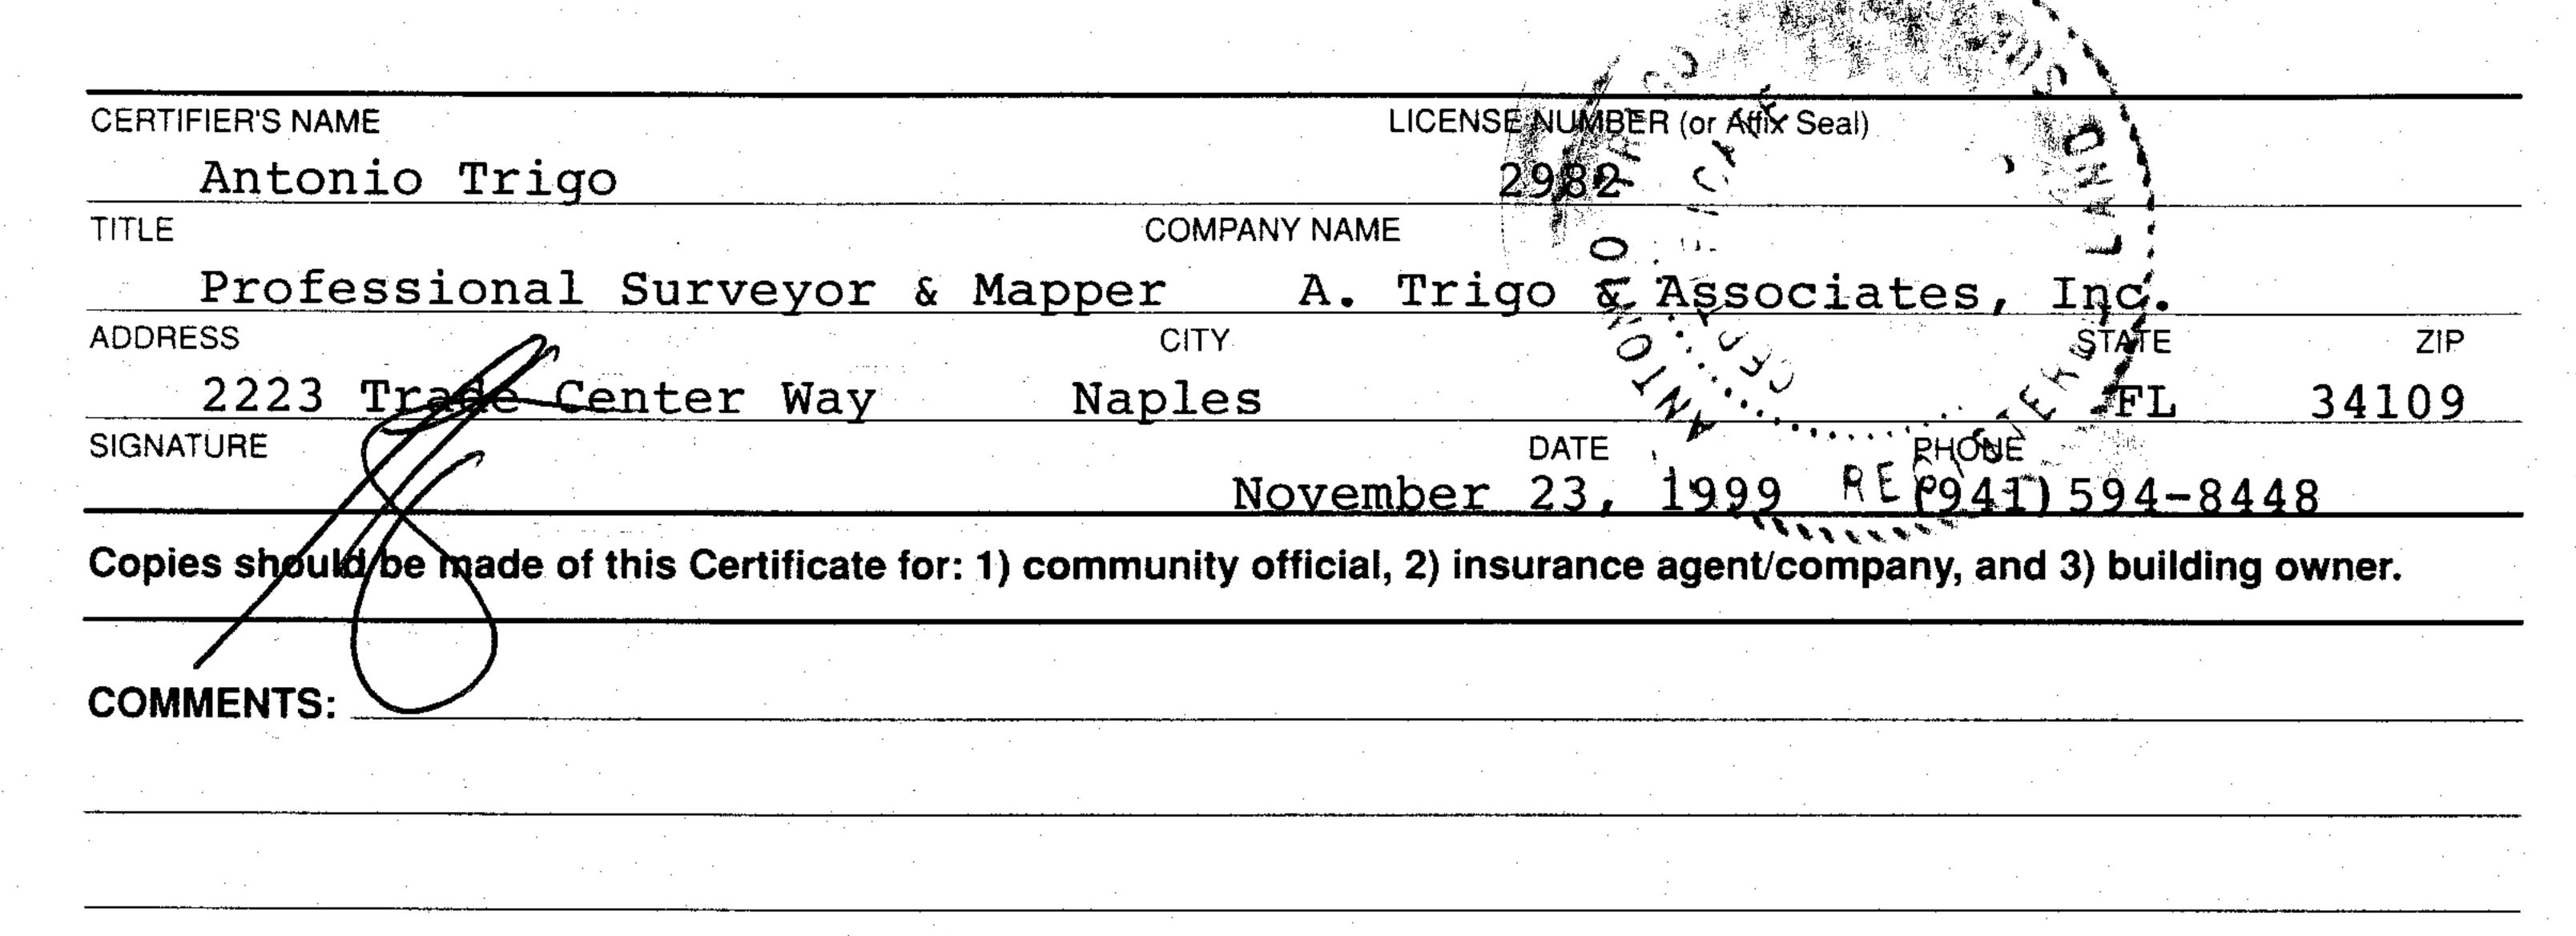

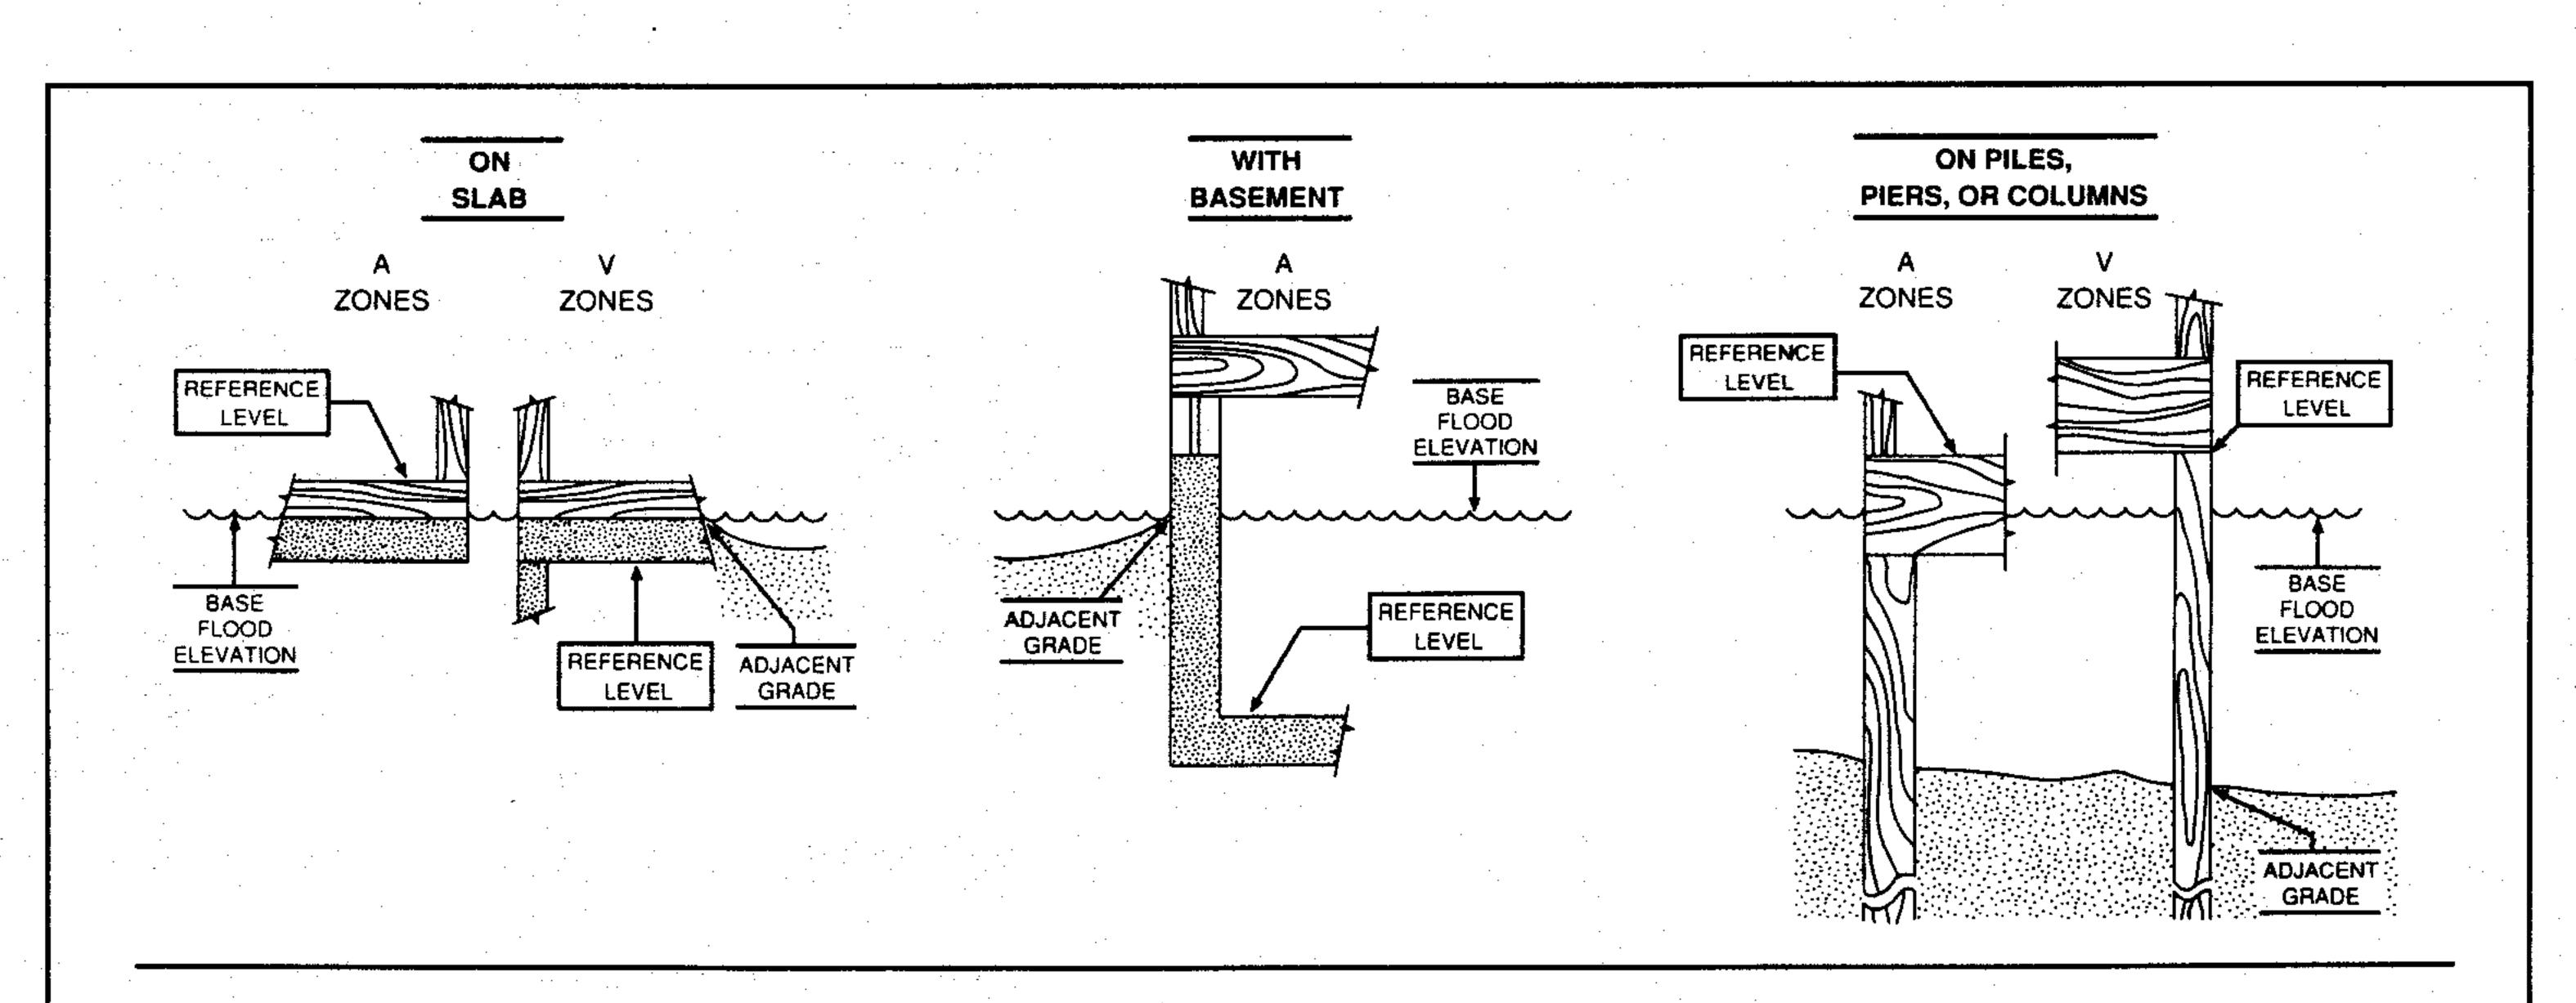

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.