formul #18-021779

ELEVATION CERTIFICATE

O.M.B. No. 3067-007 Expires July 31, 1999

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are no required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

·	SECTION A PR	OPERTY INFO	RMATION		FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME		-			POLICY NUMBER
STREET ADDRESS (Including Act 435 Tarpon Cour		Number) OR P.O. F	ROUTE AND BOX NUMBER		COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and	,	la _ Tl t.		•	
Lot 16, Block 3	Marco Be	each Unit	<u> </u>	STATE	ZIP CODE
Marco Island				FL	34145
	SECTION B F	LOOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	
Provide the following from t	he proper FIRM (See	Instructions):			
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLCOD ELEVATION (in AO Zores, use depth)
120067	0804	D	2-16-95	AE	10.0'
7. Indicate the elevation dat 8. For Zones A or V, where the community's BFE:	no BFE is provided o	n the FIRM, an	id the community has esta	ablished a BFE for	Other (describe on back) or this building site, indicate
	SECTIO	ON C BUILDII	NG ELEVATION INFORM	IATION	
(c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The form one) the highest grade level) elevated in account and account to the elevation data under Comments on Page the FIRM [see Section is equation under Comment equation under Comment for the elevation reference marks. The reference level elevation (NOTE: Use of construct case this certificate will on will be required once constitutions. The elevation of the lower form of th	VE, and V (with BFE) is at an elevation of BFE). The floor used the highest grade action used as the reference adjacent to the build redance with the community of the last on Page 2.) I used appears on FIF ation is based on: I will be valid for the build for the bui	The bottom of as the reference level from ing. If no flood nunity's floodplate elevation datument the elevation datument datumen	feet NGVD (or other FIRmoe level from the selected uilding. In the selected diagram is depth number is available ain management ordinance above reference level element of the datum system used in measuring the element of the datum system used in the datum system is a system of the datum system is a system of the system of the system is a system of the system	M datum—see Set diagram is diagram is diagram is diagram is difference sed on the FIRM awings reference level. A post-construction	floor in place, in white
Section B, Item 7).		······································		··· <u>·</u> ································	
			MMUNITY INFORMATIC		
 If the community official residual is not the "lowest floor" as floor" as defined by the official residual. Date of the start of constitution. 	s defined in the comn rdinance is:	nunity's floodpla	ain management ordinand IGVD (or other FIRM datu	e, the elevation m-see Section I	


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30.VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6. 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

Trigo & Associ	ates, Ir STATE FL	ac. ZIF 34109
	STATE	ZIF
	STATE	ZIF
les		_
les	FL	34109
		J 4 x U J
DATE PHO 1 27, 1998 (9	CNE 41)594-8	3448
surance agent/company,	, and 3) build	ling owner.
-	surance agent/company	surance agent/company, and 3) build

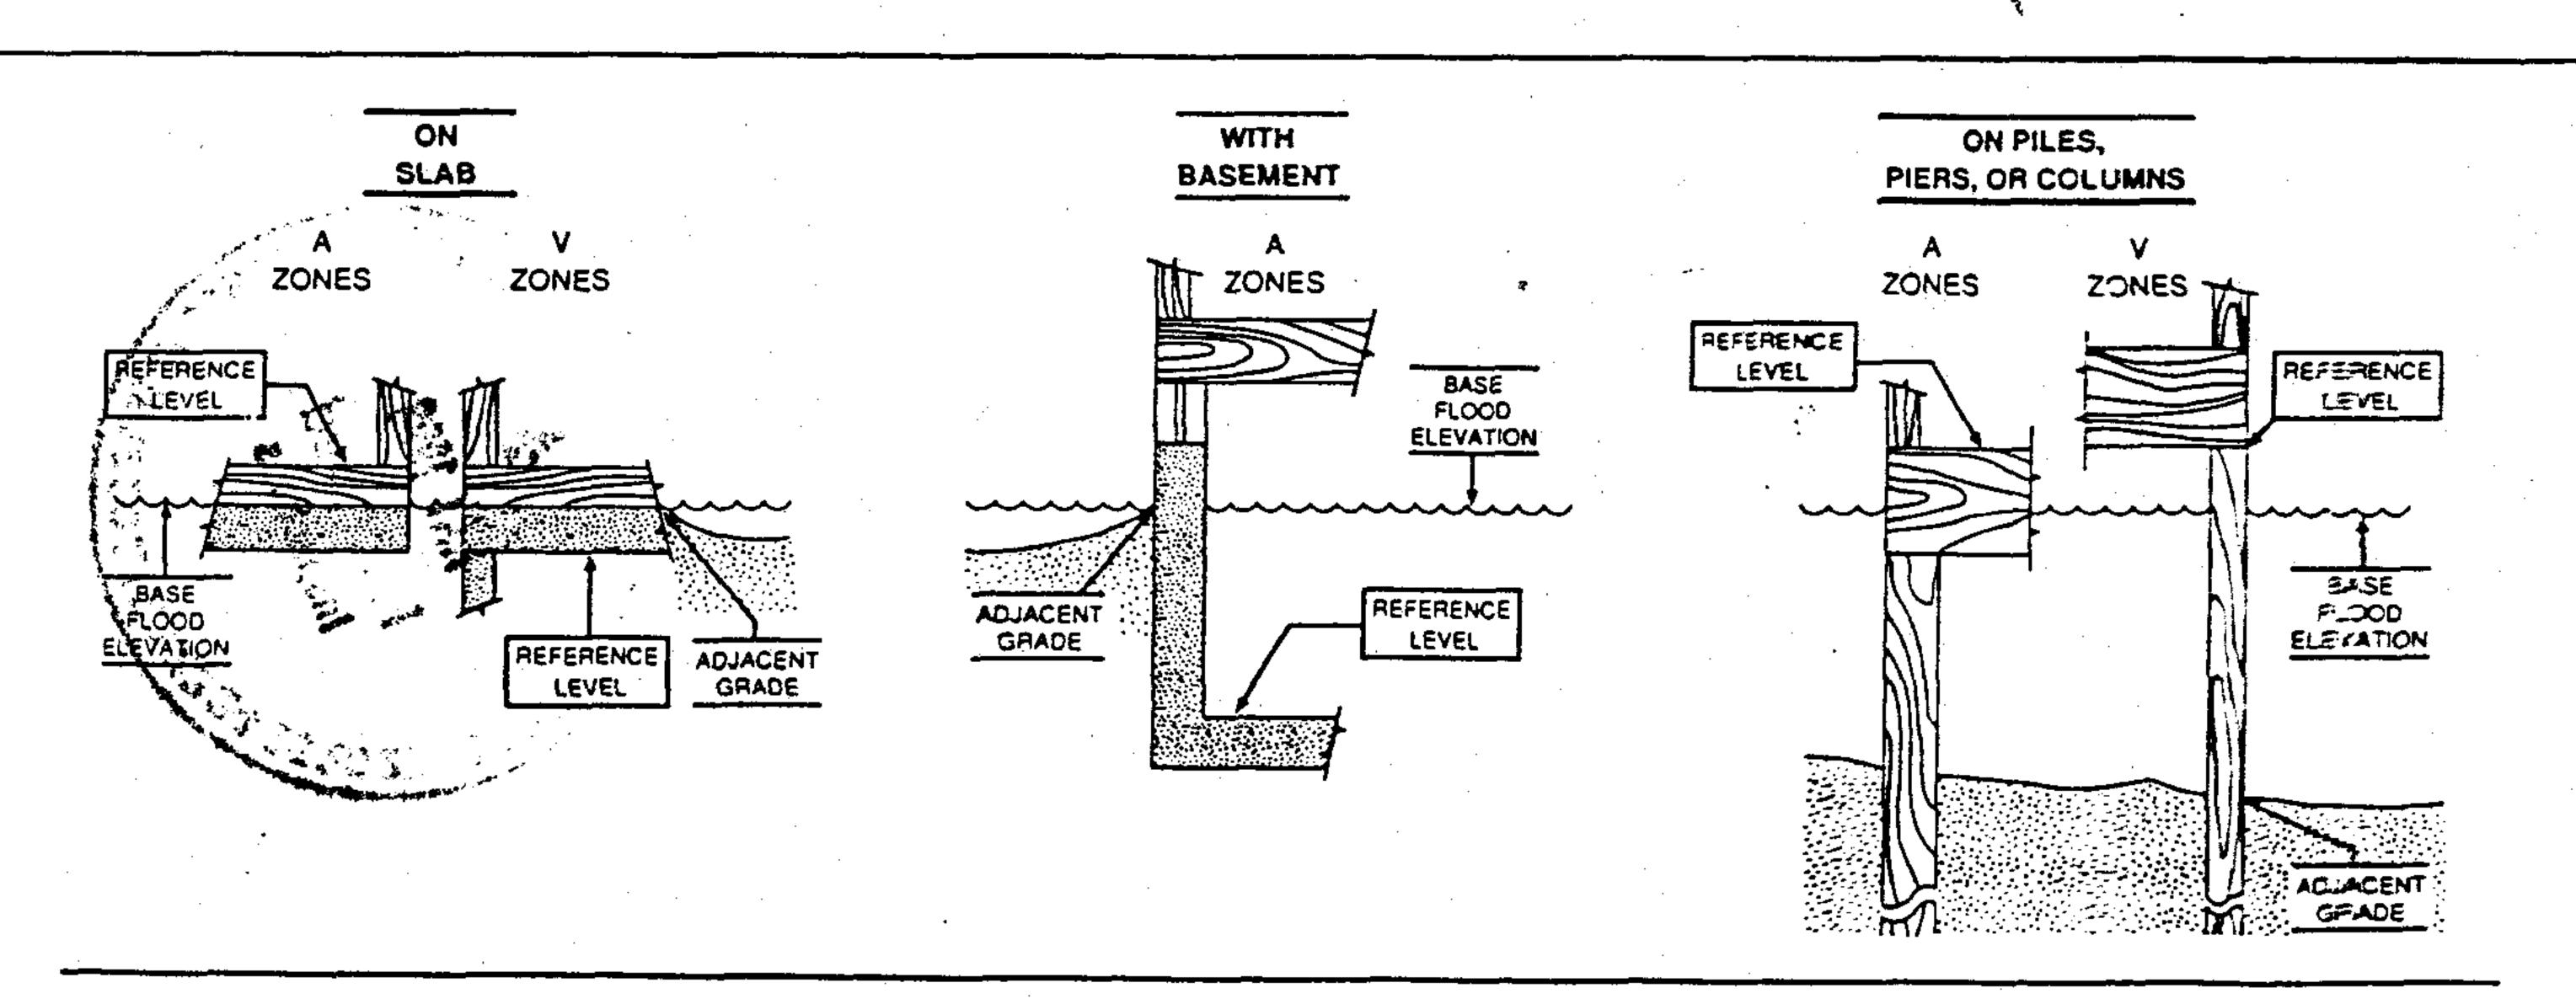

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.