99 1129

SEE REVERSE SIDE FOR CONTINUATION

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INS	SURANCE COMPANY USE			
BUILDING OWNER'S NAME	POLICY	NUMBER			
Emerald T. Enterprises LCC	·				
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	COMPA	NY NAIC NUMBER			
349 Waterleaf Court					
OTHER DESCRIPTION (Lot and Block Numbers, etc.)					
Lot 4, Block 252, Marco Beach Unit 6 CITY STA	TE	ZIP CODE			
	L	Zir COOE			
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORM					
Provide the following from the proper FIRM (See Instructions):					
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM		BASE FLOOD ELEVATION (in AO Zones, use depth)			
120067 0803 E 2/16/95 P	E	+10.0'			
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): X NG	VD '29 Ot	her (describe on back)			
8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a		•			
the community's BFE: feet NGVD (or other FIRM datum-see Section B, Item 7).					
SECTION C BUILDING ELEVATION INFORMATION					
 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the of 10 10 1 feet NGVD (or other FIRM datum—see Section B, Item 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural m the selected diagram, is at an elevation of 10 feet NGVD (or other FIRM datum—(c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram below (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is 10 ne) the highest grade adjacent to the building. If no flood depth number is available, is the belevel) elevated in accordance with the community's floodplain management ordinance? 11 Nevel elevation datum system used in determining the above reference level elevations: 12 under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: 11 Yes 12 No (See Instructions on Page 4) 	ember of the see Section is feet above uilding's lower some see No No NGVD '29 is different the FIRM and shape of the second see the second second see the second sec	reference level from B, Item 7). feet above or or below (check st floor (reference) Unknown Other (describe an that used on			
5. The reference level elevation is based on: X actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference case this certificate will only be valid for the building during the course of construction. A post-convil be required once construction is complete.)	e level floor ir	n place, in which			
6. The elevation of the lowest grade immediately adjacent to the building is: 17.0 feet Section B, Item 7).	NGVD (or oth	er FIRM datum-see			
SECTION D COMMUNITY INFORMATION					
 If the community official responsible for verifying building elevations specifies that the reference is not the "lowest floor" as defined in the community's floodplain management ordinance, the eleftor" as defined by the ordinance is:	vation of the	building's "lowest			

REPLACES ALL PREVIOUS EDITIONS

FEMA Form 81-31, MAR 97


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

			·		
CERTIFIER'S NAME		LICENSE NUMBER (or Affix Seal)			
Antonio Trigo		2982			
TITLE	COMPA	COMPANY NAME			
Professional Survey	or & Mapper	A. Trigo & Asso	ciates, Inc.		
ADDRESS	CITY		STATE	ZIP	
2223 Trade Ognter V	Naple Naple	es	FL	34109	
SIGNATURE		DATE March 24, 199	PHONE 9 (941)594-84	48	
Copies should be made of this Certif	icate for: 1) community	official, 2) insurance agent/c	company, and 3) building	owner.	
COMMENTS:					
				· · · · · · · · · · · · · · · · · · ·	

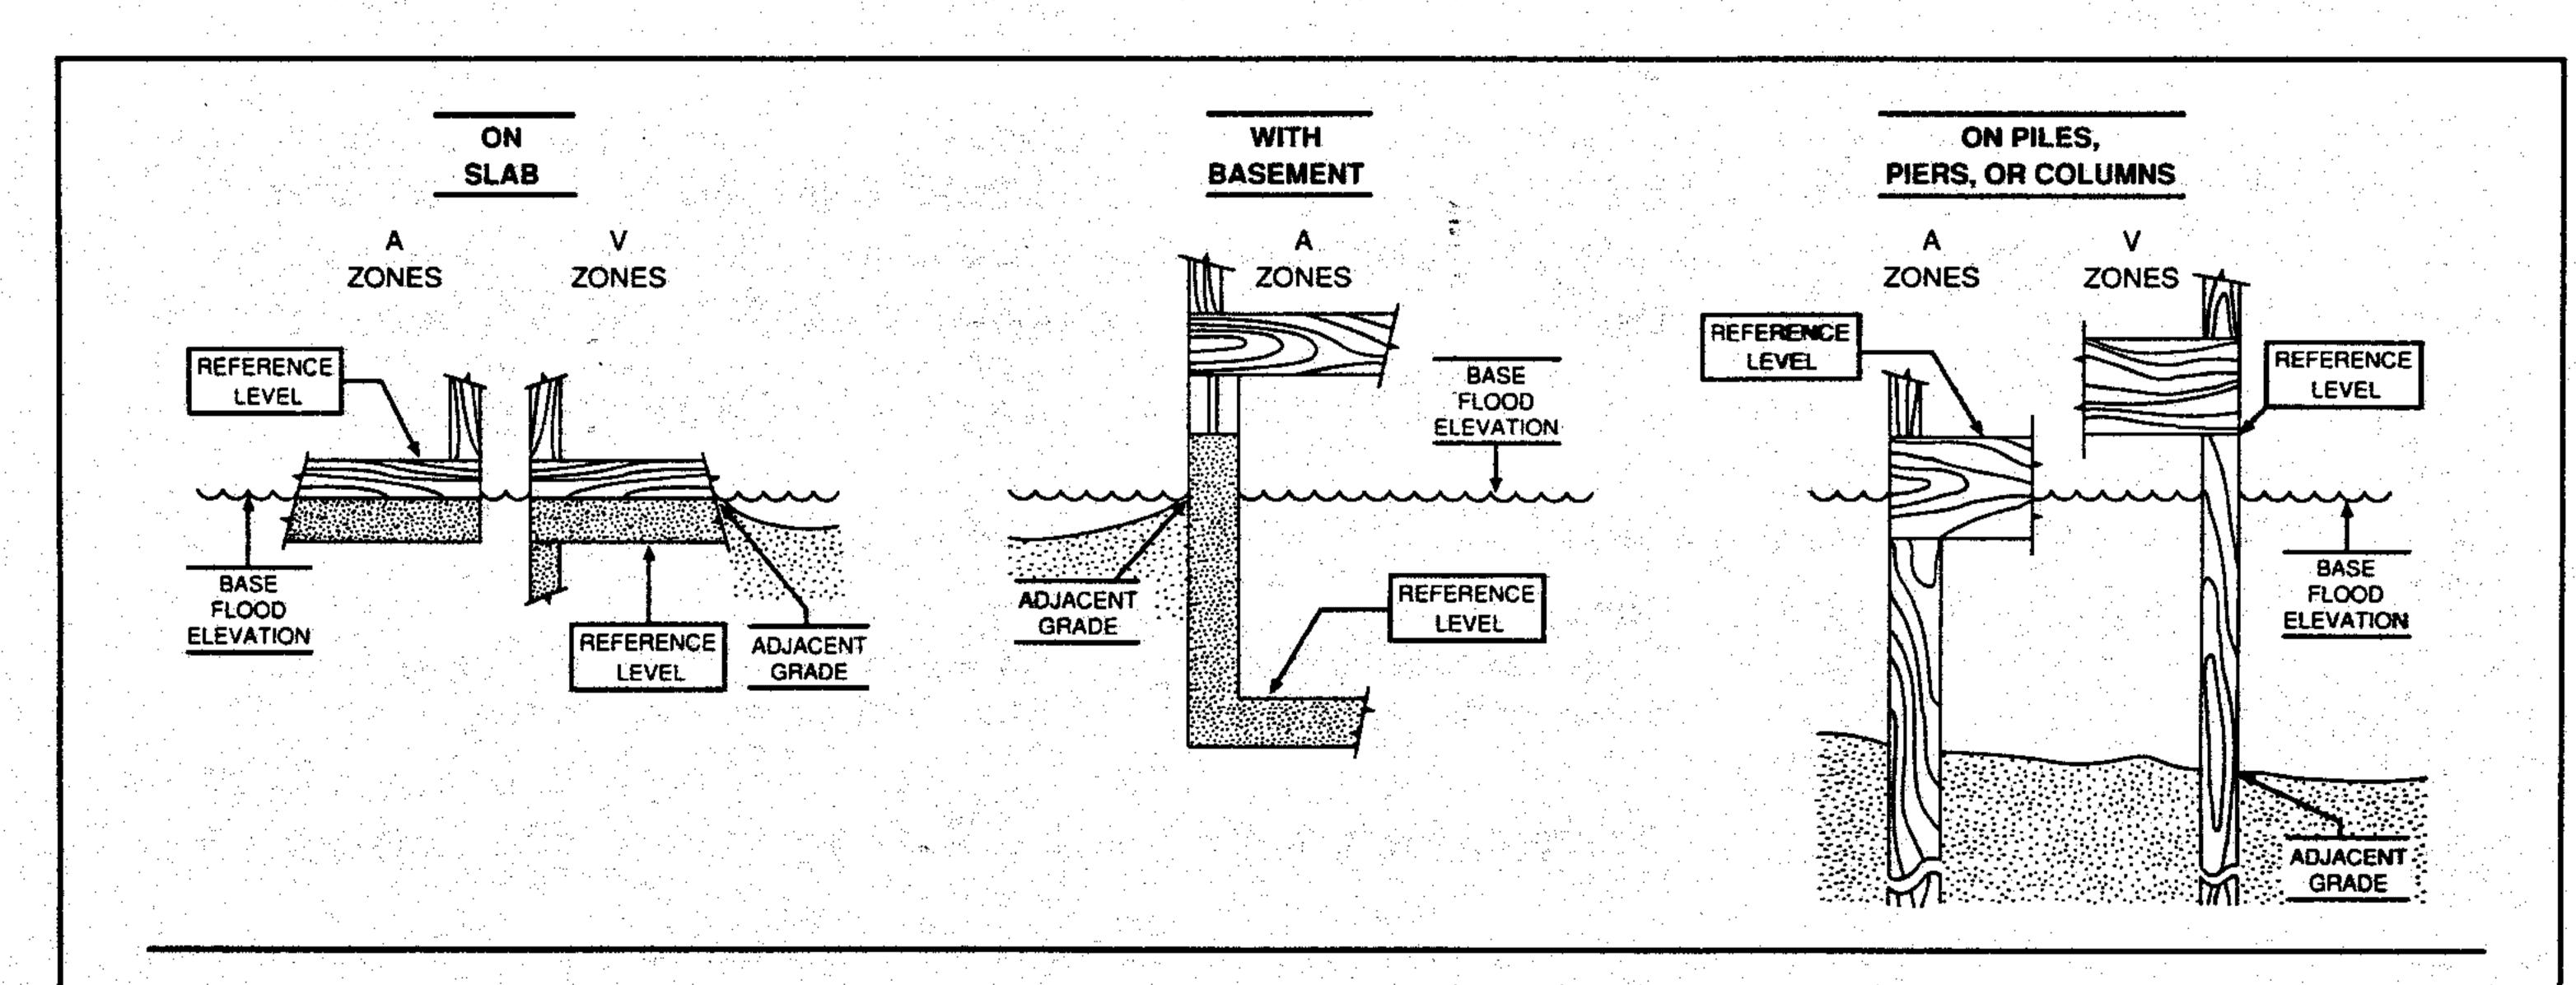

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.