## O.M.B. NO. 3067-0077 Expires May 31, 1996

## ELEVATION CERTIFICATE

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

9-4036

SEE REVERSE SIDE FOR CONTINUATION

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME THOMAS AND LAGUELS THOSEOTT	POLICY NUMBER	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bidg. Number) OR P.O. ROUTE AND BOX NUMBER  362 Water George	COMPANY NAIC NUMBER	
OTHER DESCRIPTION (Lot and Block Numbers, etc.)  LOT 18, BC 252, Marco Parcu Unit C		
STATE MARCO LSCANO FROMENO	ZIP CODE 3445	
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION		
Provide the following from the proper FIRM (See Instructions):	چچرن برجوی نفات او در	
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZONE 12.0067 0803 . F Var 20, 1998 AG	6. BASE FLOOD ELEVATION (in AO Zones, use depth)	
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): XNGVD '29 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE f the community's BFE:	Other (describe on back) or this building site, indicate	
SECTION C BUILDING ELEVATION INFORMATION		
describes the subject building's reference level  2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the select of If feet NGVD (or other FIRM datum—see Section B, Item 7).  (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member the selected diagram, is at an elevation of feet NGVD (or other FIRM datum—see Section B, Item 7).  (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is below (check one) the highest grade adjacent to the building.  (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is feet all one) the highest grade adjacent to the building. If no flood depth number is available, is the building level) elevated in accordance with the community's floodplain management ordinance? Yes Indicate the elevation datum system used in determining the above reference level elevations: NGV under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different firm [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM equation under Comments on Page 2.)  4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4)	of the reference level from ection B, Item 7).	
5. The reference level elevation is based on: K actual construction C construction drawings		
(NOTE: Use of construction drawings is only valid if the building does not yet have the reference level case this certificate will only be valid for the building during the course of construction. A post-construct will be required once construction is complete.)	ion Elevation Certificate	
S. The elevation of the lowest grade immediately adjacent to the building is:	or other FIRM datum-see	
SECTION D COMMUNITY INFORMATION		
If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:		

REPLACES ALL PREVIOUS EDITIONS

FEMA Form 81-31, MAY 93


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (c	r Affix Seal)
Aerus C. Quinnell	200000 LO	698/12422
TITLE RECORDED	COMPANY NAME	
ADDRESS	CITY	STATE ZIP
40.00x 524	ANDER SLAND	FL BUYL
SIGNATURE	1/17/00	PHONE 941 591 - 9921
Copies should be made of this Certificate f	for: 1) community official, 2) insurance ag	ent/company, and 3) building owner.
	ه هند در مقابی پیرد کارد در موسود کارد و در موسود کارد به می در بازد در موسود کارد و در در موسود کارد و در موسود ک	ent/company, and 3) building owner.
Copies should be made of this Certificate f	ه هند در مقابی پیرد کارد در موسود کارد و در موسود کارد به می در بازد در موسود کارد و در در موسود کارد و در موسود ک	ent/company, and 3) building owner.
	ه هند در مقابی پیرد کارد در موسود کارد و در موسود کارد به می در بازد در موسود کارد و در در موسود کارد و در موسود ک	ent/company, and 3) building owner.
	ه هند در مقابی پیرد کارد در موسود کارد و در موسود کارد به می در بازد در موسود کارد و در در موسود کارد و در موسود ک	ent/company, and 3) building owner.
	ه هند در مقابی پیرد کارد در موسود کارد و در موسود کارد به می در بازد در موسود کارد و در در موسود کارد و در موسود ک	ent/company, and 3) building owner.
	ه هند در مقابی پیرد کارد در موسود کارد و در موسود کارد به می در بازد در موسود کارد و در در موسود کارد و در موسود ک	ent/company, and 3) building owner.
	ه هند در مقابی پیرد کارد در موسود کارد و در موسود کارد به می در بازد در موسود کارد و در در موسود کارد و در موسود ک	ent/company, and 3) building owner.
	ه هند در مقابی پیرد کارد در موسود کارد و در موسود کارد به می در در در موسود کارد به می در در در موسود کارد و در در در در موسود کارد و کارد کارد کارد کارد کارد	ent/company, and 3) building owner.

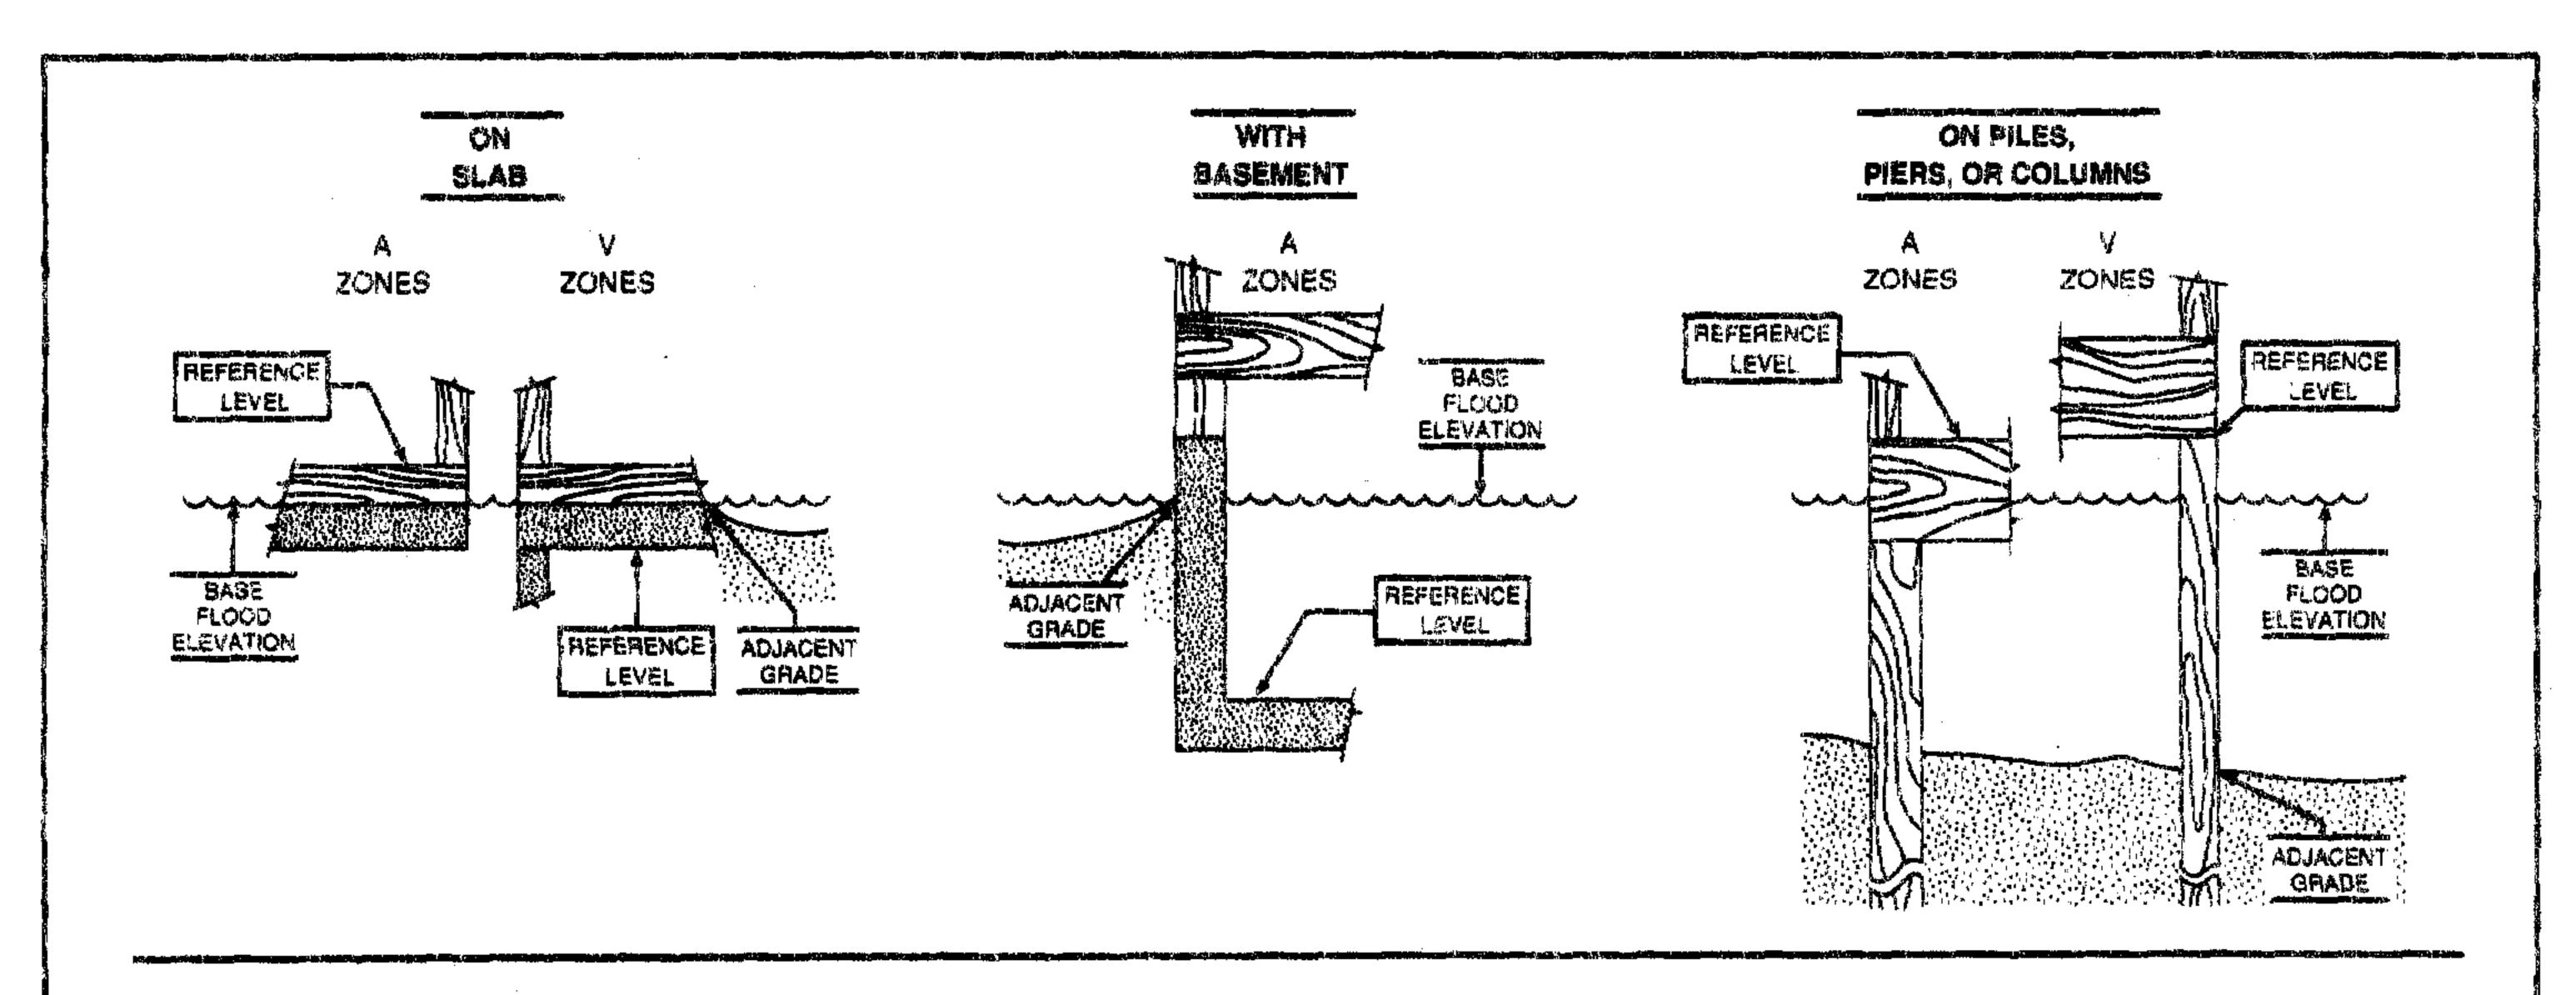

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.