ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.E. No. 3067-0077 Expires July 31, 1999

SEE REVERSE SIDE FOR COMMINUATION

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

SECTION A PR	1	FOR INSURANCE CONFANY LISE		
BUILDING OWNER'S NAME 1. CAS CASCASE		POLICY NUMBER		
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg.		COMPANY NAIC NUMBER		
OTHER DESCRIPTION (Lot and Block Numbers, etc.) Lots 47 BLK.799 7-13	A PORTUE	4 T= L M4210	<u> 34.</u>	T-6
17/120 IS (AUC)			STATE	ZIP ()()DF
SECTION 8 F	LOOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	
Provide the following from the proper FIRM (See	Instructions):			
1. COMMUNITY NUMBER 2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIAM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
120067 6804		C·3·86	AE	
	dGVD (or other	FIRM datum-see Section	B, item 7).	r this building site, indicate
SECTI	ON C BUILDI	ng elevation inform	IATION	· · · · · · · · · · · · · · · · · · ·
 (b) FIRM Zones V1-V30, VE, and V (with BFE the selected diagram, is at an elevation of (c). FIRM Zone A (without BFE). The floor use below (check one) the highest grade a (d). FIRM Zone AO. The floor used as the reference) the highest grade adjacent to the buildievel) elevated in accordance with the communicate the elevation datum system used in under Comments on Page 2). (NOTE: If the the FIRM [see Section B, Item 7], then converted. 	d as the refere diacent to the troper level from the ding. If no flood munity's flood petermining the elevation datured	Jeet NGVD (or other FIF noe level from the selected wilding. In the selected diagram is depth number is availablain management ordinant above reference level element or used in measuring the in used in measuring the	M datum—see Sed diagram is let at let is the building ce? Yes NGV ations: M NGV alevations is differ	ction B, Item 7). [] [set above []] cr cove [] or below [] (check s lowest floor (reference No [] Unknown D '29 [] Other (describe rent than that used on
equation under Comments on Page 2.)	(573 S	"", I M /Can instructions s	n Dane di	
4. Elevation reference mark used appears on F 5. The reference level elevation is based on: (NOTE: Use of construction drawings is only case this certificate will only be valid for the based once construction is complete.)	actual constructions of the building during the	uction oonstruction d Iding does not yet have th	rawings e relerence level	floor in place, in which ion Elevation Certificate
6. The elevation of the lowest grade immediatel Section B. Item 7).	·	e building is:	l. L. teet NGVD	(or other FIRM datum-see
**************************************	ECTION D C	OMMUNITY INFORMATI	ÒN	· · · · · · · · · · · · · · · · · · ·
1. If the community official responsible for verify is not the "lowest floor" as defined in the comfloor" as defined by the ordinance is:	ing building ele munity's floodp	vations specifies that the lain management ordinar NGVD (or other FIRM date	reference level in ce, the elevation um-see Section	of the building's "Icwest

REPLACES ALL PREVIOUS EDITIONS

FEMA Form 81-31, MAR 97


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

	.				.}
CERTIFIER'S NAME		NSE NUMBER (or Affix Sea	l)	· •	
	30 LBSS	<u> </u>			
	DOMPANY NAME				
Target and the second s	- <u>470u</u>		1		
3470 157-44E LLW LLW	ETY C	34(20	. <u> </u>	STATE	. 7/P
SIGNATURE		DATE	PHONE	741-3	SS CHEES
Copies should be made of this Certificate for: 1) commi	unity official, 2)	insurance agent/con	ipany, and	3) buildin	g owner.
COMMENTS: BOUCH MAZK BASES (-4/1B2	(2.			
Boilding & Size Lunez	CELLY		1 (12134.1 <u>121)</u>		are the state of t
				•	•
#T: 	······································		. <u>.</u>	. <u> </u>	
	TARREST DE LA CONTRACTOR DE LA CONTRACTO			0 - 200	

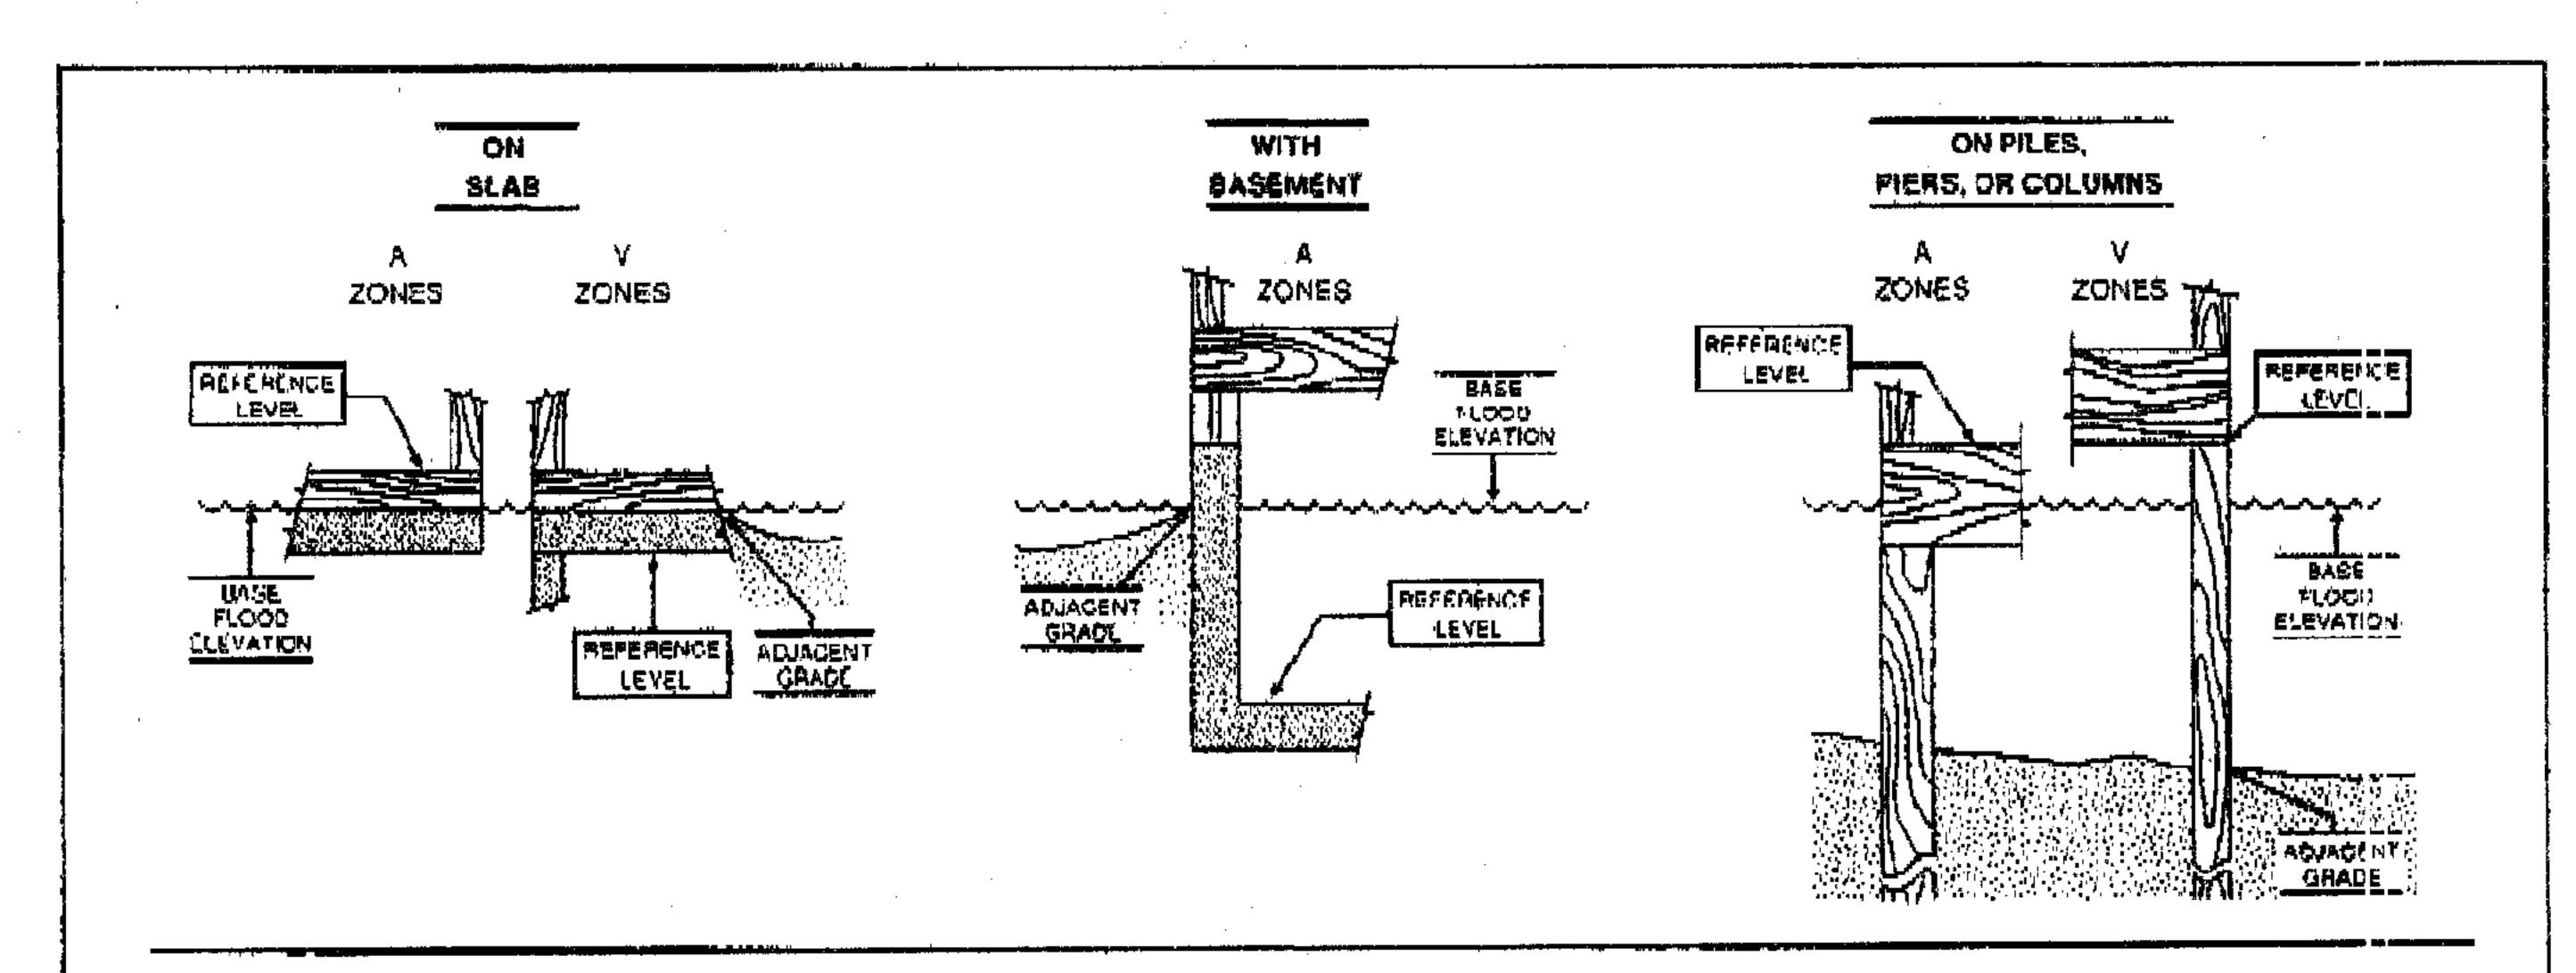

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.