


94-9240

ELEVATION CERTIFICATE
FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION

BUILDING OWNER'S NAME	FOR INSURANCE COMPANY USE
G.F. Wilson Construction/ Taylor <i>Bill & Freida</i>	POLICY NUMBER
STREET ADDRESS (including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	COMMUNITY NUMBER
1430 Quintara Court	
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	STATE FIRM CODE
Lot 5 Block 315 - Marco Beach U-9	
CITY	
Marco Island	

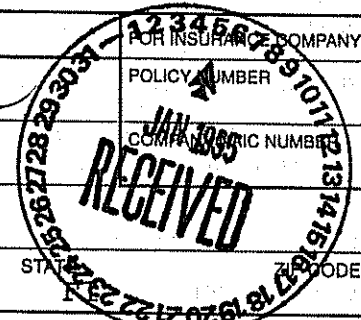

SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION

Provide the following from the proper FIRM (See Instructions):

1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
120067	0812	E	8/3/92	AE	10.0'

7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back)
 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: [] feet NGVD (or other FIRM datum—see Section B, Item 7).

SECTION C BUILDING ELEVATION INFORMATION

1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level: 1.
- 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of [] [] [] 10.0 feet NGVD (or other FIRM datum—see Section B, Item 7).
- (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of [] [] [] [] [] [] [] feet NGVD (or other FIRM datum—see Section B, Item 7).
- (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is [] [] [] feet above or below (check one) the highest grade adjacent to the building.
- (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is [] [] [] feet above or below (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? Yes No Unknown
3. Indicate the elevation datum system used in determining the above reference level elevations: NGVD '29 Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.)
4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4)
5. The reference level elevation is based on: actual construction construction drawings
(NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)
6. The elevation of the lowest grade immediately adjacent to the building is: [] [] [] [] 6.6 feet NGVD (or other FIRM datum—see Section B, Item 7).

SECTION D COMMUNITY INFORMATION

1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: [] [] [] [] [] [] [] feet NGVD (or other FIRM datum—see Section B, Item 7).
2. Date of the start of construction or substantial improvement: 9/20/94

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME Antonio Trigo	LICENSE NUMBER (or Affix Seal) 2982
TITLE Professional Land Surveyor	COMPANY NAME A. Trigo & Associates, Inc.
ADDRESS 2223 Trade Center Way	CITY STATE ZIP Naples FL 33942
SIGNATURE 	DATE PHONE January 4, 1995 (813) 594-8448

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS:

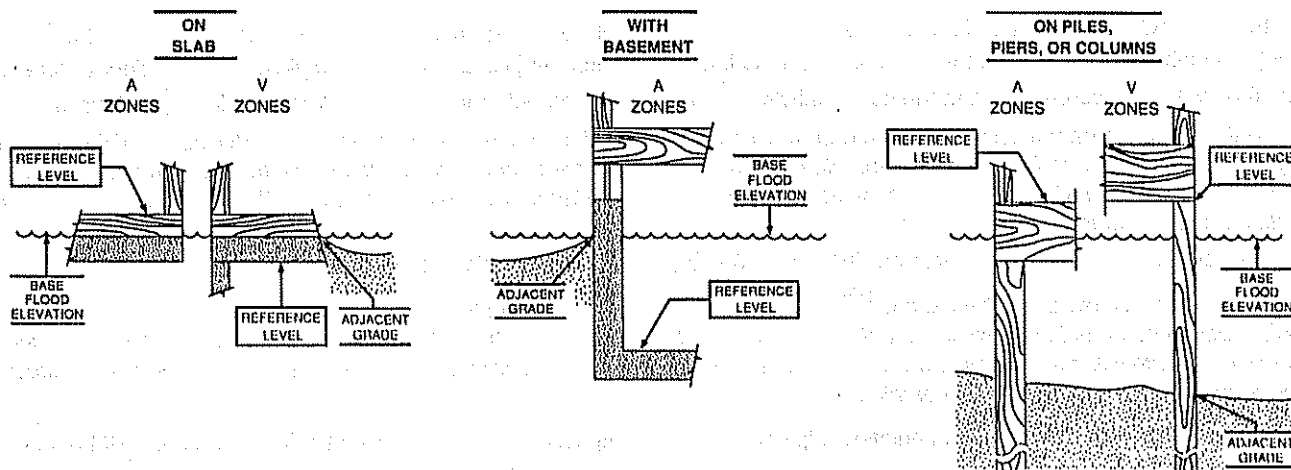

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor. Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.


N 79 00 45 E
I 79 12 42 E

131.11 (MEAS. & SEAWALL)
130.89 (PLAT)


FLOOD ZONE AE
ELEV: 10' HAVD
COMM/PARALLEL:
120007 | 0812 E
2/3 42

94-9240

Elevations - OK
Date 1/5/95 Initials RO
Collier County Inspections

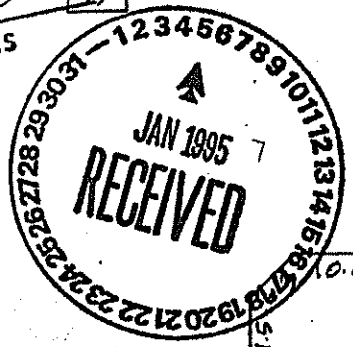

Set Backs
Date Initials
Collier County
Building Review and Permitting

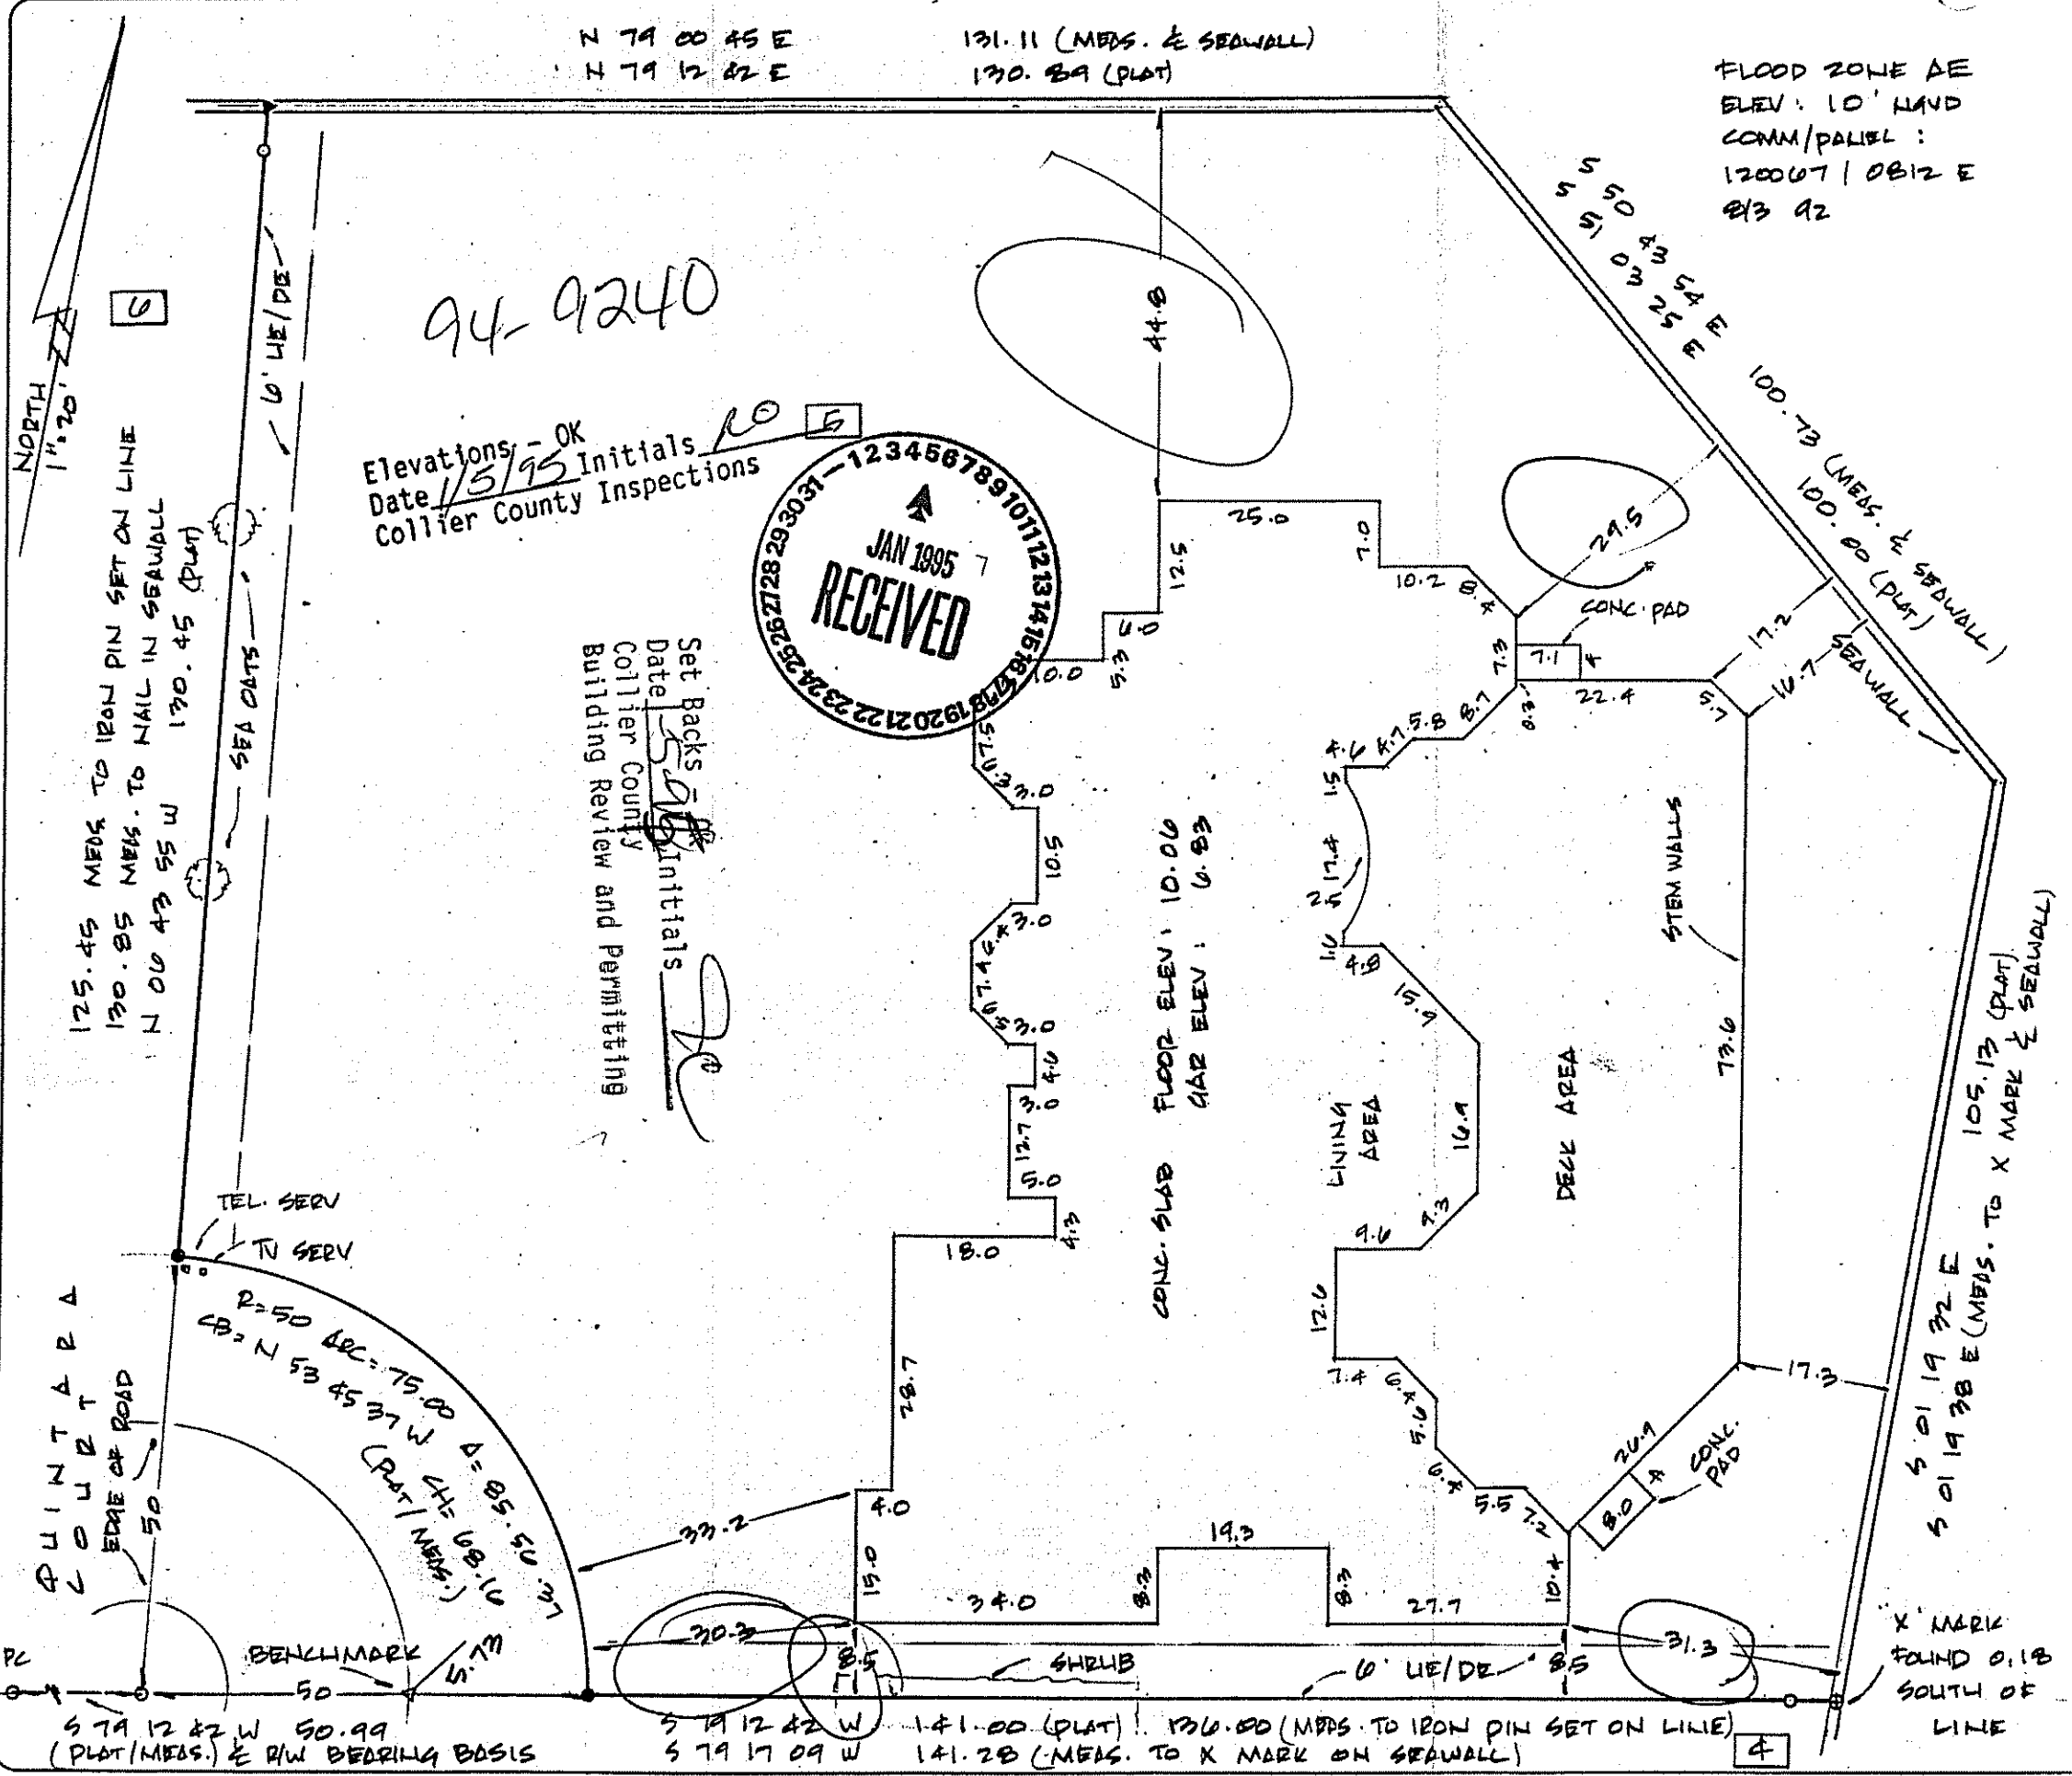

DESCRIPTION:

LOT 5 BLOCK 315
MARCO BEACH
UNIT 9

AS RECORDED IN PLAT BOOK 6 PAGE 69 THRU 73
OF THE PUBLIC RECORDS OF COLLIER COUNTY, FLORIDA
AS FURNISHED BY CLIENT

LEGEND:

- = FOUND CONCRETE MONUMENT
- = SET CONCRETE MONUMENT (L.B. # 3964)
- = FOUND IRON PIN
- = SET 5/8" IRON PIN (L.B. # 3964)
- ▲ = FOUND NAIL
- △ = SET NAIL
- ⊙ = SET DRILL HOLE
- ⊗ = FOUND DRILL HOLE
- P.C. = POINT OF CURVATURE
- P.T. = POINT OF TANGENCY
- P.I. = POINT OF INTERSECTION
- L.B. = LAND SURVEYING BUSINESS
- C.B.S. = CONCRETE BLOCK STRUCTURE
- L.M.E. = LAKE MAINTENANCE EASEMENT
- P.C.C. = POINT OF COMPOUND CURVATURE
- P.R.C. = POINT OF REVERSE CURVATURE
- P = PLAT
- MEAS = MEASURED
- D = DEED
- C = CALCULATED
- Δ = DELTA ANGLE
- R = RADIUS
- CH = CHORD
- CB = CHORD BEARING
- D.E. = DRAINAGE EASEMENT
- U.E. = UTILITY EASEMENT
- CONC. = CONCRETE
- R/W = RIGHT-OF-WAY
- CL = CENTERLINE
- LS. = LAND SURVEYOR

CERTIFICATE

WE HEREBY CERTIFY TO: WILLIAM TAYLOR
G.F. WILSON CONSTRUCTION

THAT A SURVEY OF THE HEREON DESCRIBED PROPERTY WAS
MADE UNDER OUR DIRECTION AND TO THE BEST OF OUR
KNOWLEDGE AND BELIEF MEETS THE MINIMUM TECHNICAL
STANDARDS AS PER CHAPTER 21HH-6 F.A.C. THERE ARE NO
ENCROACHMENTS OTHER THAN SHOWN NO BOUNDARY LINE
DISPUTES, EASEMENTS OR CLAIMS OF EASEMENTS OF WHICH
WE HAVE KNOWLEDGE.

P.L.S. DATE 1/3 95
FLA. CERT. No. 2482 NOT VALID UNLESS SEALED


THIS CERTIFICATION IS ONLY FOR THE LANDS AS
DESCRIBED ABOVE. IT IS NOT A CERTIFICATION
OF TITLE, ZONING OR FREEDOM OF ENCUMBRANCES,
ABSTRACT NOT REVIEWED

DATE OF SURVEY: 5/3 94
F.B. 335 PAGE 72
DRAWN BY: JBL SCALE: 1"=20'

REVISIONS:	BOOK	PAGE
1/3 95 FOUNDATION LOCATION	359	01

A. TRIGO & ASSOCIATES, INC.
PROFESSIONAL LAND SURVEYORS & PLANNERS
1033 FIFTH AVENUE, NORTH
NAPLES, FLORIDA 33940
LAND SURVEYING BUSINESS # 3964

FILE NO: A. 94. 0417. 1

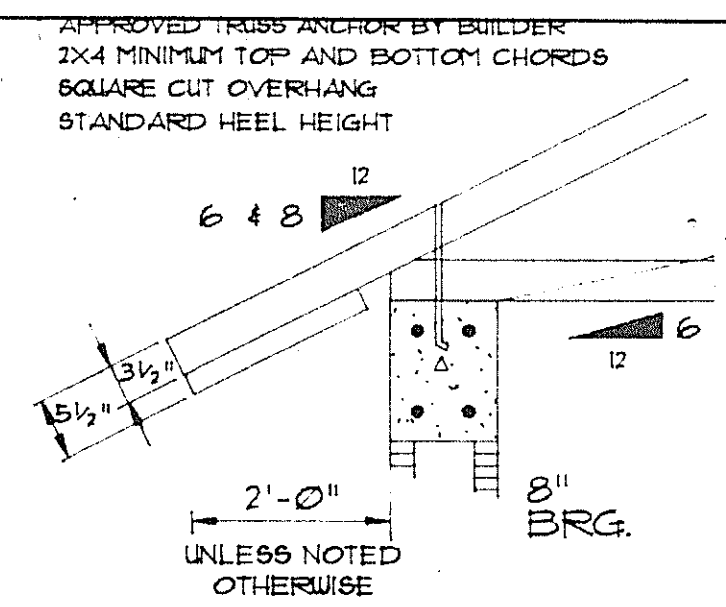

TYPICAL TRUSS END DETAIL

ALL WALLS SHOWN ON THIS LAYOUT ARE TO BE LOAD BEARING

	5'-10" AFF.
	10'-0" AFF.
	12'-0" AFF.
	14'-0" AFF.

TRUSS BEARING HEIGHT SCHEDULE

LOADS

TC LL = 20#/SF.
 TC DL = 20#/SF.
 BC DL = 10#/SF.
 110 M.P.H. WIND
 125 DUR FAC

ALL REACTIONS OVER 5000# AND ALL UPLIFTS OVER 1000# ARE SHOWN ON THIS LAYOUT

NOTE:
 YOUR SIGNATURE WILL ACKNOWLEDGE:
 1) AUTHORIZATION FOR FABRICATION.
 2) VERIFICATION OF ALL DIMENSIONS, CONDITIONS, AND TRUSSES. TRUSSES WILL BE MADE IN STRICT ACCORDANCE WITH THIS PLACEMENT PLAN.
 3) RECEIPT AND USE OF THIS 91 Summary Sheet COMMENTARY AND RECOMMENDATIONS FOR HANDLING, INSTALLING & BRACING METAL PLATE GUSSETED WOOD TRUSSES (T9).

SIGNED _____
 TITLE _____
 DATE _____

ALL SPACING IS 24" O.C. EXCEPT AS SHOWN.
 DO NOT CUT OR ALTER TRUSSES WITHOUT AUTHORIZATION FROM THIS OFFICE.

ALL WALLS SHOWN ARE BRACED.
 (UNLESS NOTED OTHERWISE)

WARNING

ERECTOR BRACING IS NOT THE RESPONSIBILITY OF TRUSS DESIGNER. PLATE MANUFACTURER, FOR TRUSS FABRICATION. PROTECTING TRUSSES ARE FASTENED TO NEW PROFESSIONAL ADVICE REGARDING ERECTOR BRACING METHOD IS ALWAYS REQUIRED TO PREVENT TOPPING AND BOWING DURING ERECTION, AND PERMANENT BRACING METHOD MAY BE REQUIRED BY SPECIFIC APPLICATIONS. SEE T9-10 COMPANY SHEET FOR ERECTION AND RECOMMENDATIONS FOR HANDLING, INSTALLING & BRACING METAL PLATE GUSSETED WOOD TRUSSES (T9). TRUSSES ARE TO BE ERECTED AND FASTENED TO A STRONG AND PLUMB POSITION WHEN NO SHEATHING IS APPLIED DIRECTLY TO THE TOP CHORDS. THEY SHALL BE BRACED AS SPECIFIED ON THE TRUSS DESIGN.

TRUSSES SHALL BE HANDLED WITH REASONABLE CARE DURING ERECTION TO PREVENT DAMAGE.


ALL VALLEYS ARE CALCULATED WITHOUT SHEATHING UNDER.


NOTE:
 FOR ANY TRUSS TO TRUSS CONNECTION WITH A REACTION GREATER THAN 5000 POUNDS OR SKEWED, NO HANGER IS SUPPLIED.
 CONTRACTOR SHOULD CHECK ALL REACTIONS FOR PROPER CONNECTIONS.



CUSTOMER: **G.F. WILSON CONST., INC.**

PROJECT: TAYLOR
 DATE: 8/17/94
 DRAWN BY: JR. GARCIA

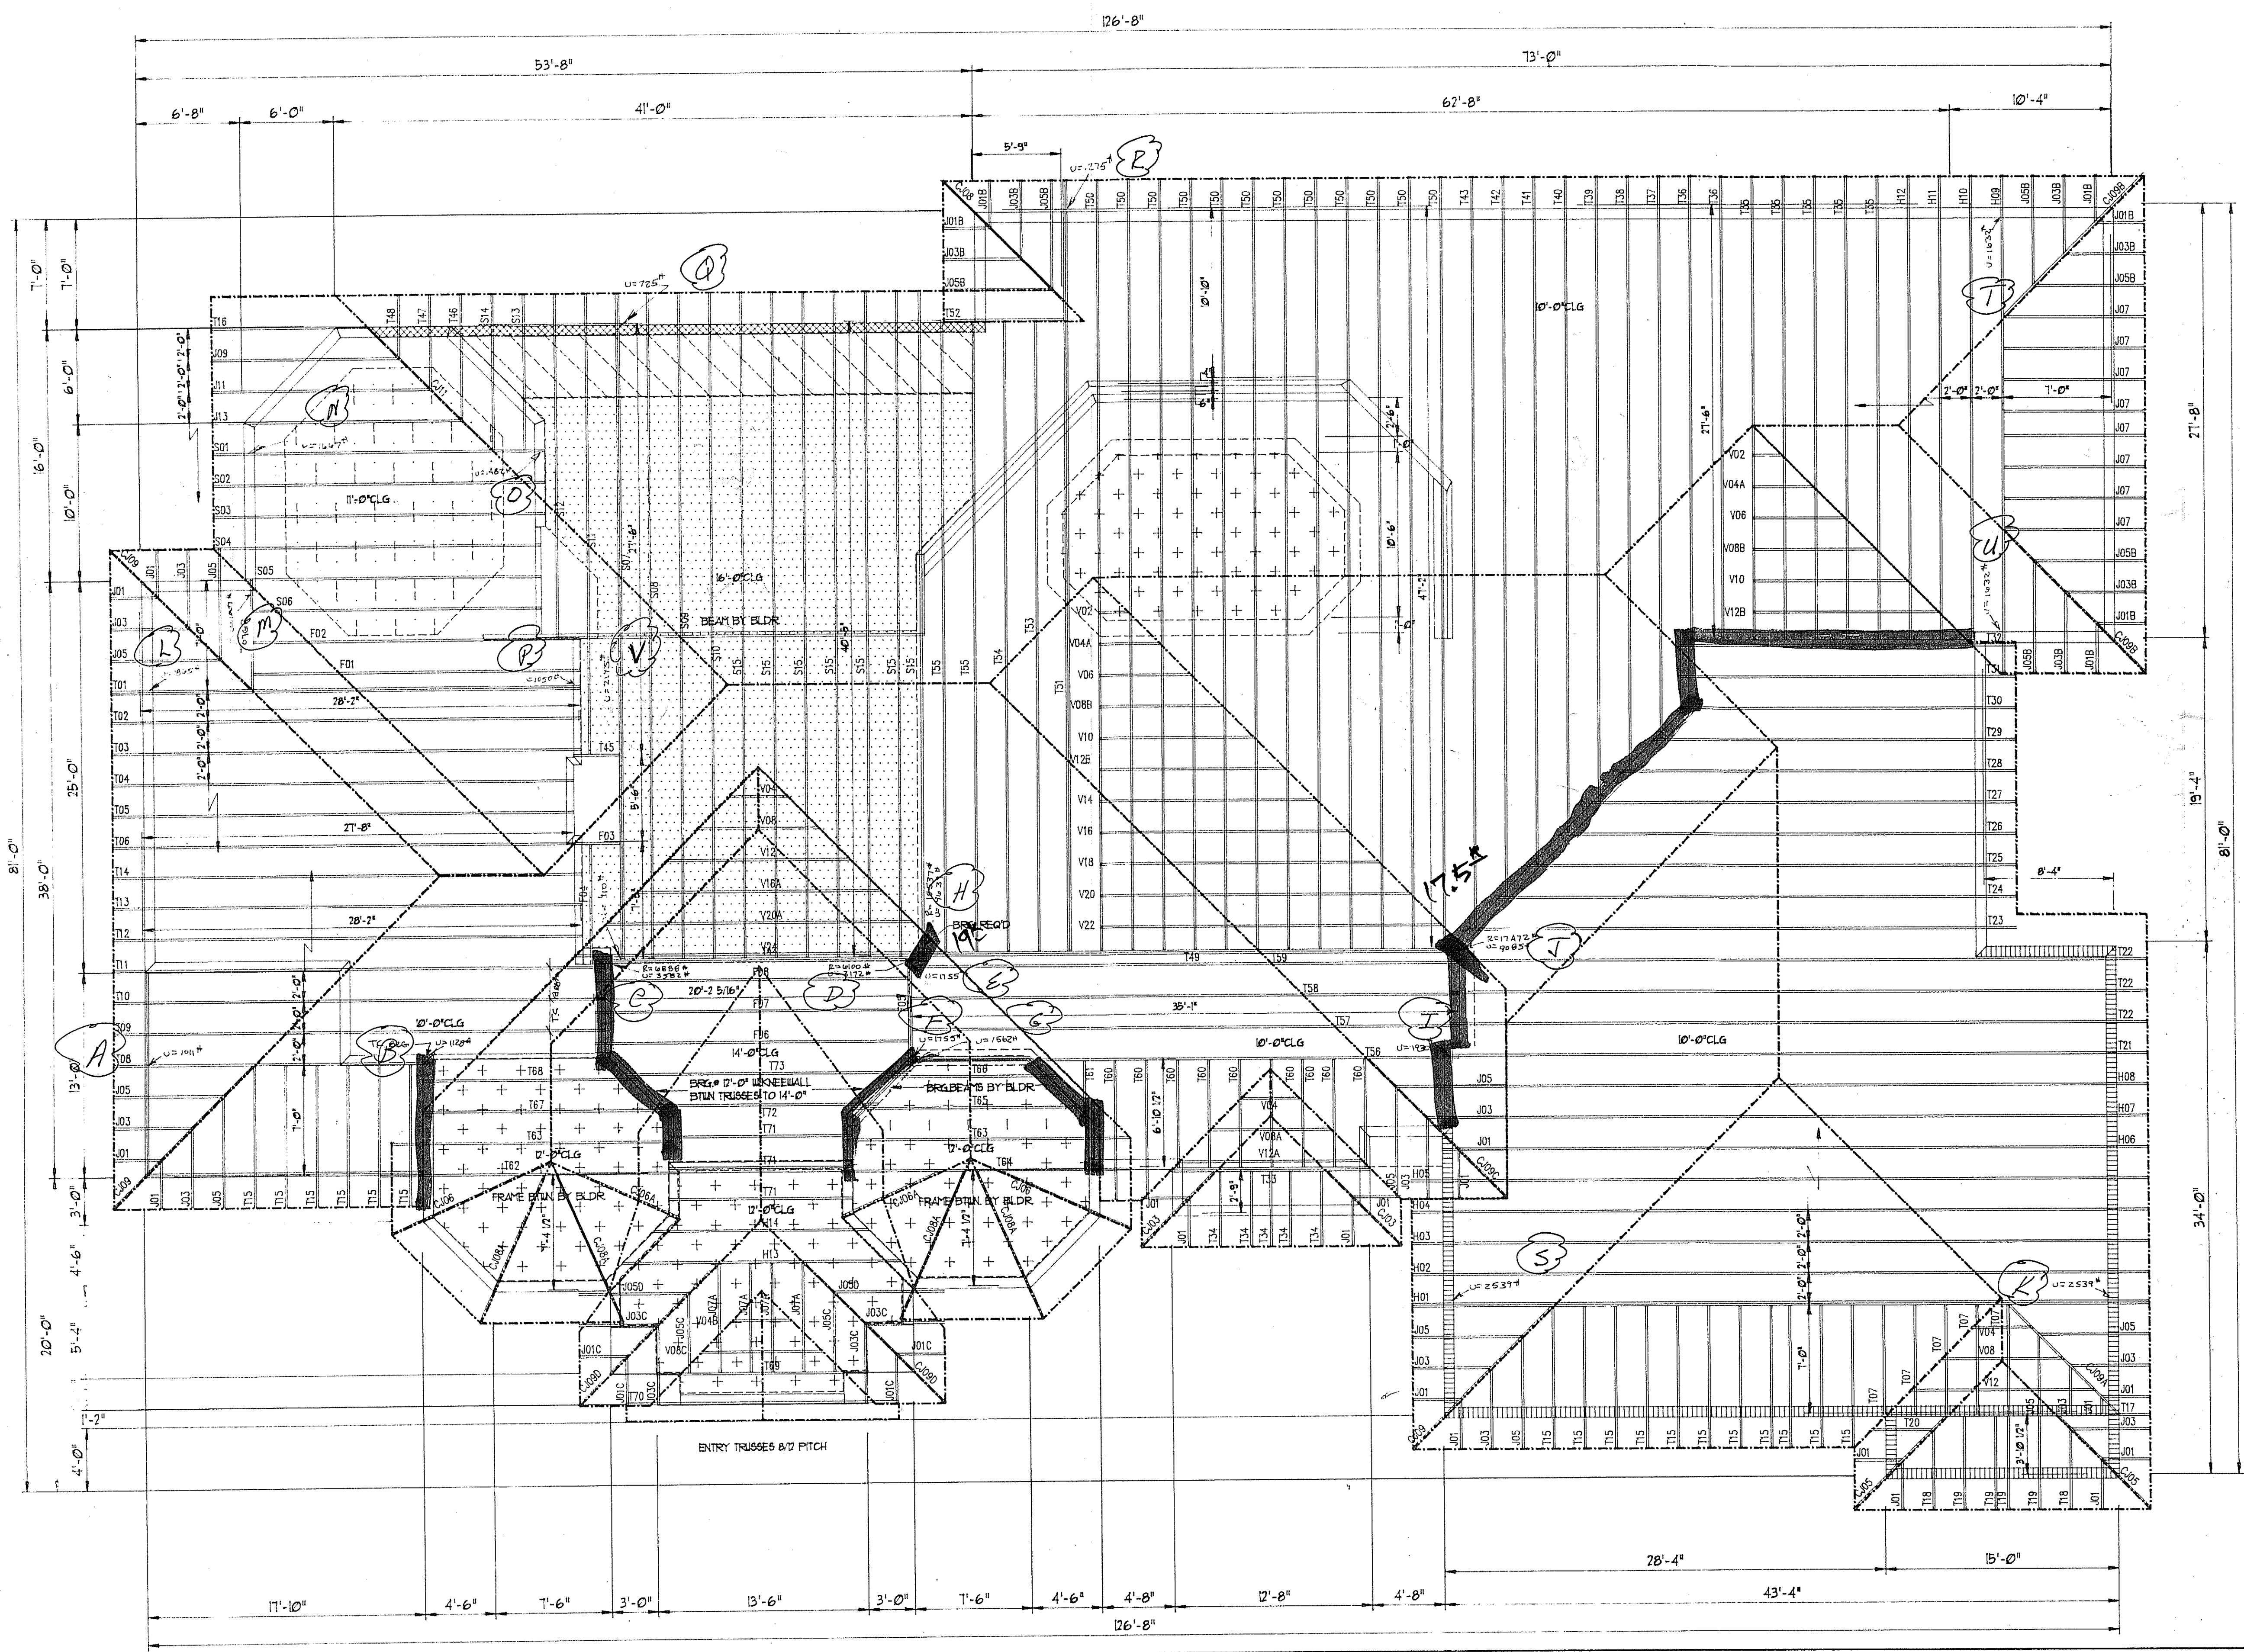

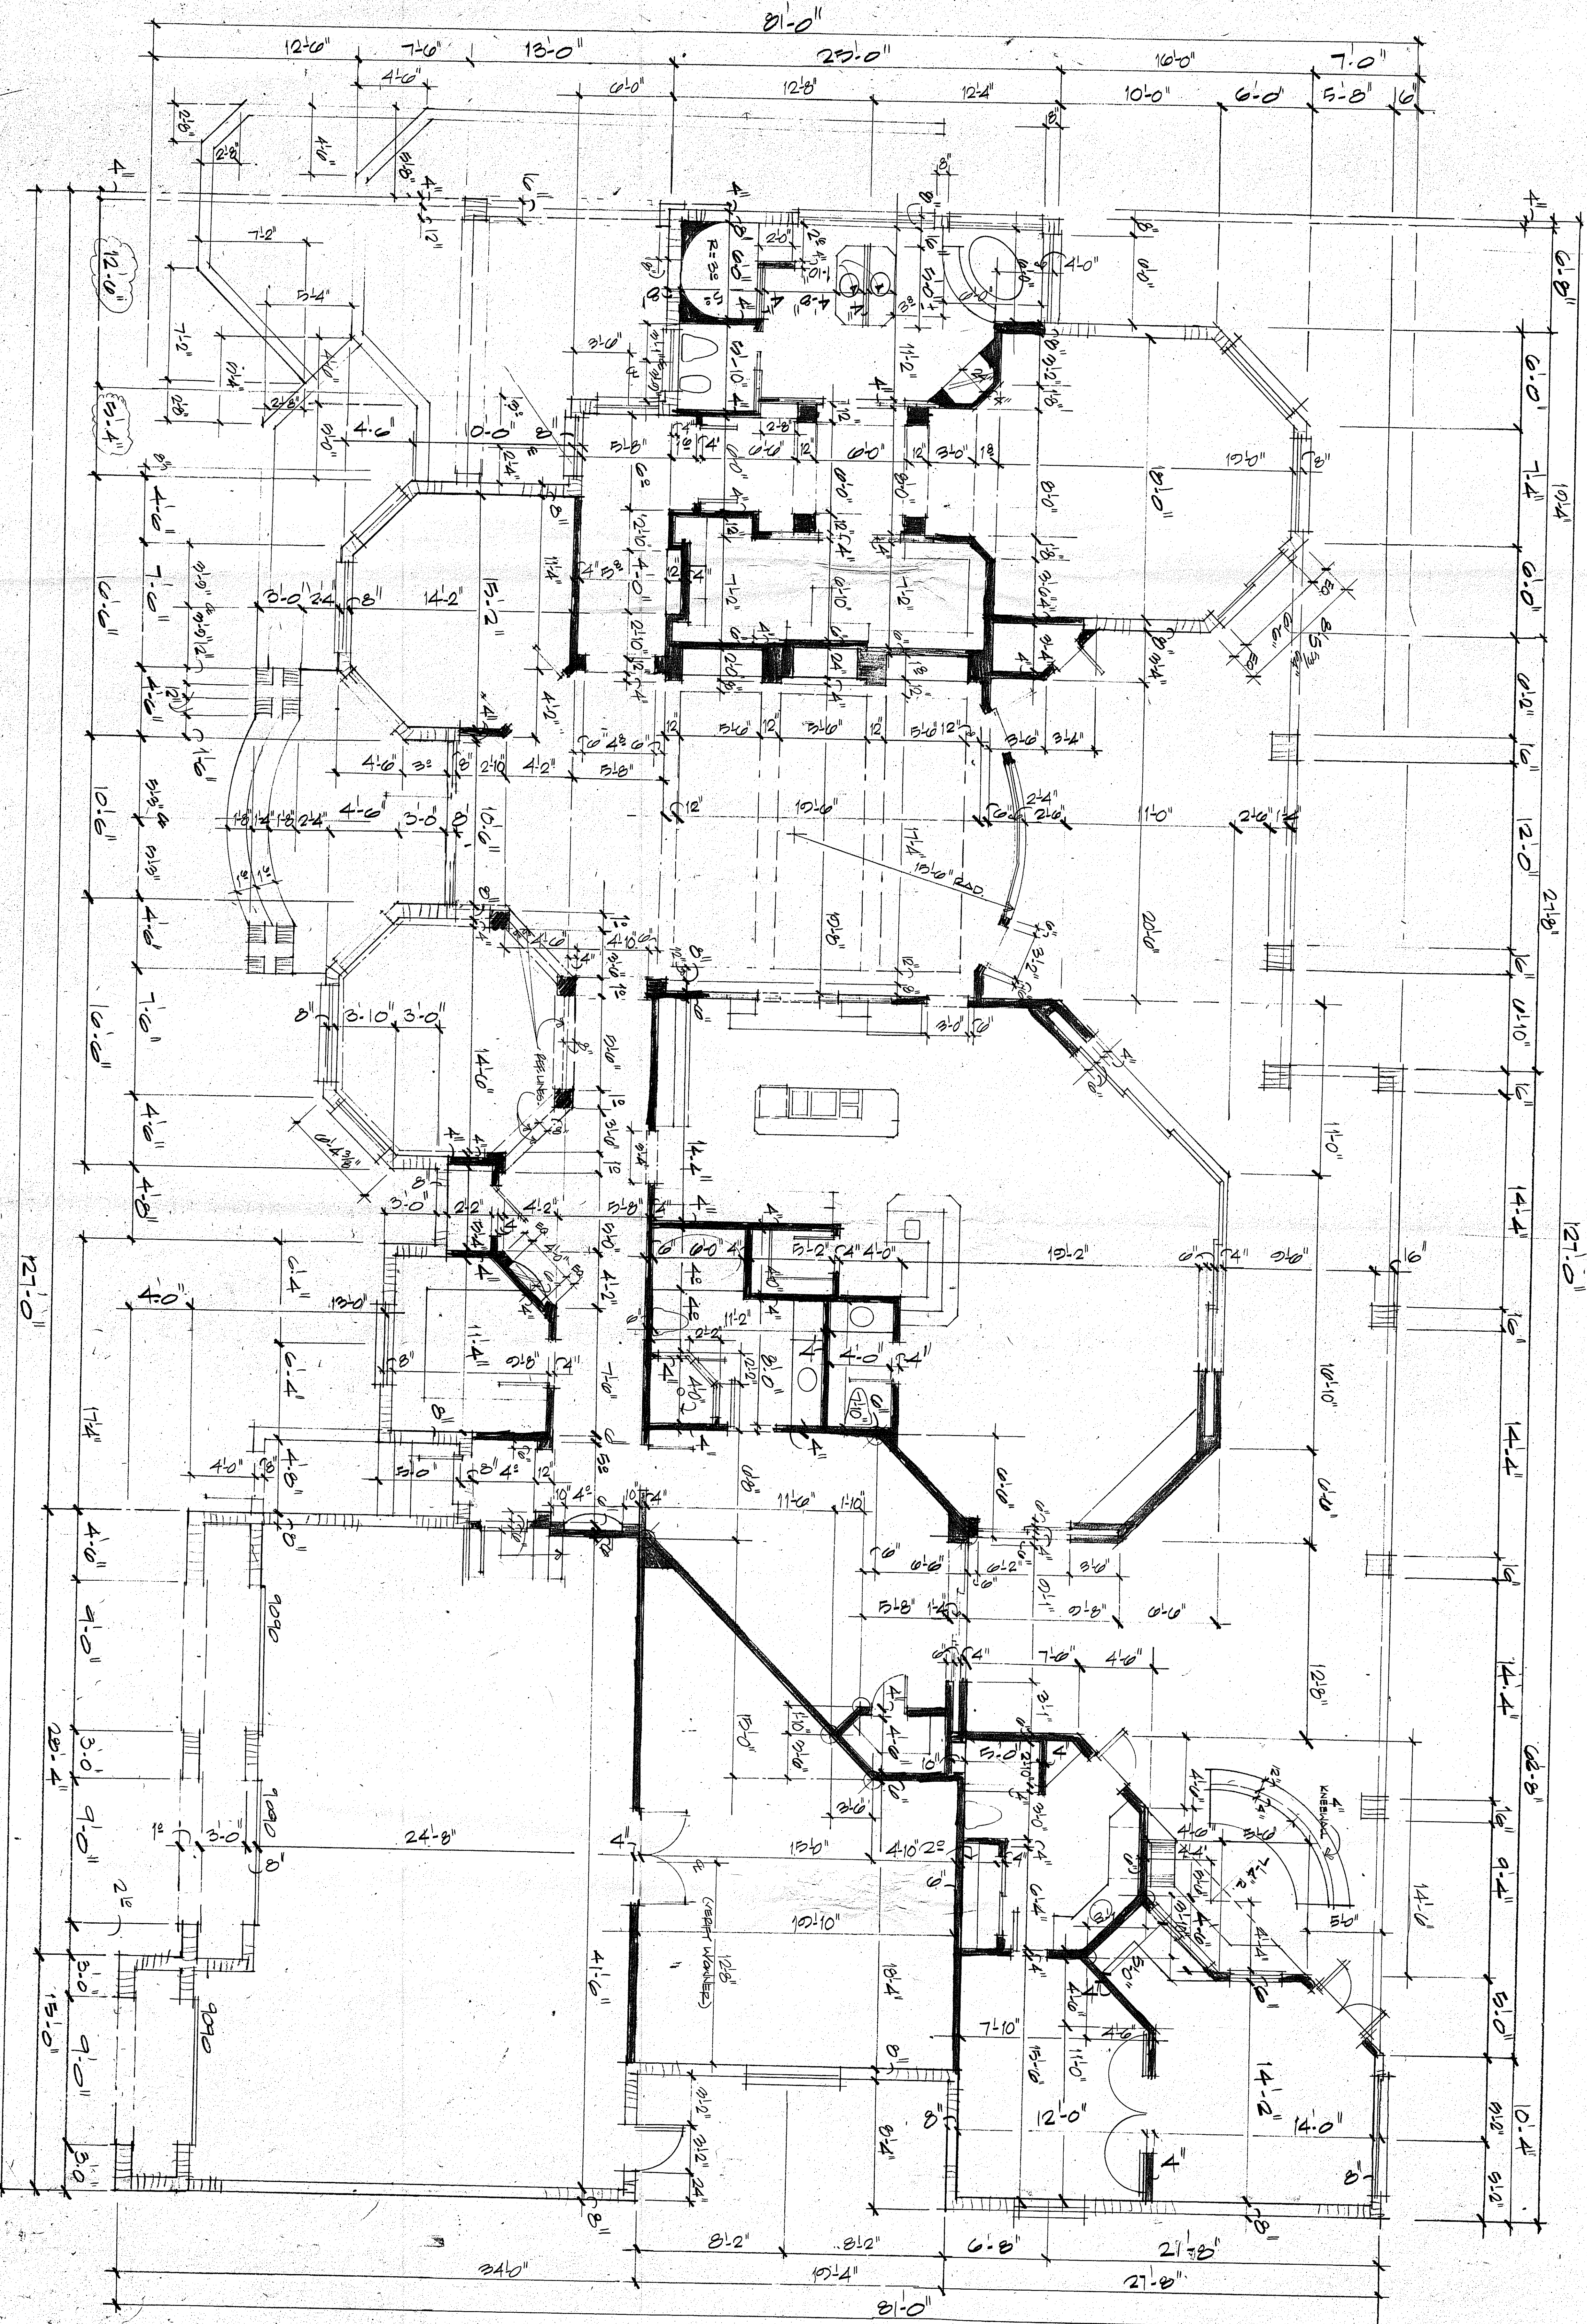

PROJECT # 973
 DATE: 06-16-94
 DRAWN: [Signature]
 CHECKED: [Signature]

NO.	DATE	REVISIONS

ERIC S. BROWN DESIGN GROUP, INC. is a registered professional architectural firm in the State of Florida. The firm is responsible for the design and construction of the project. The design is based on the information provided by the client and is subject to change without notice. The client is responsible for obtaining all necessary permits and approvals from the local authorities. The firm is not responsible for any errors or omissions in the drawing.

PROJECT: Taylor Residence
 Marco Island, Florida

BUILDER/CONTRACTOR: G.F. WILSON CONSTRUCTION, INC.



ERIC S. BROWN DESIGN GROUP, inc.
 DESIGN • PLANNING • GRAPHICS

FT. MYERS • BONITA SPRINGS
 NAPLES

