# U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

# **ELEVATION CERTIFICATE**

**Important:** Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION FOR INSURANCE COMPA							ANCE COMPANY USE	
A1. Building Owner's Name  MARCO RIVER MARINA, INC.  Policy Number:								oer:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.  951 BALD EAGLE DRIVE  Company NAIC Number:								AIC Number:
City MARCO ISLAN	City State ZIP Code MARCO ISLAND Florida 34145							
		nd Block Numbers, Ta BEACH UNIT FOUR,			•	tc.)		
A4. Building Use (	e.g., Resider	ntial, Non-Residential,	Addition	, Accessory,	etc.) Non-Resi	idential (	Restrooms)	
A5. Latitude/Longi	tude: Lat. N	25°57'44.59"	Long. W	/ 81°43'36.85	" Horizonta	al Datum	n:	927 × NAD 1983
A6. Attach at least	2 photograp	hs of the building if the	e Certific	ate is being ເ	sed to obtain floo	od insura	ance.	
A7. Building Diagra	am Number	6						
A8. For a building	with a crawls	space or enclosure(s):						
a) Square foo	tage of crawl	space or enclosure(s)			717.00 sq ft			
b) Number of p	permanent flo	ood openings in the cr	awlspace	e or enclosure	e(s) within 1.0 foo	t above	adjacent gra	de 10
c) Total net ar	ea of flood o	penings in A8.b	2		1			
d) Engineered	I flood openir	ngs? 🛛 Yes 🗌 N	No					
A9. For a building v	vith an attach	ned garage:						
a) Square foot	age of attach	ned garage		N/A sq ft				
b) Number of p	permanent flo	ood openings in the at	tached g	arage within	1.0 foot above ad	ljacent g	rade N/A	
c) Total net ar	ea of flood o <sub>l</sub>	penings in A9.b		N/A sq	in			
d) Engineered	flood openin	ngs? ☐ Yes ⊠ N	No					
		ECTION B – FLOOD	INSURA			FORMA	TION	<del> </del>
B1. NFIP Commun	-	Community Number 426		B2. County COLLIER	Name			B3. State Florida
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	RM Panel ective/	B8. Flood Zone(s)	B9. B	ase Flood E Zone AO, use	levation(s) e Base Flood Depth)
12021C0828	12021C0828 H 05-16-2012 Revised Date 05-16-2012 AE 8							
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:  ☐ FIS Profile ☑ FIRM ☐ Community Determined ☐ Other/Source:								
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/Source:								
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🗌 Yes 🗵 No								
Designation Date: CBRS DPA								

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

MPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USI						
Building Street Address (including Apt., Unit, Suite, and/or 951 BALD EAGLE DRIVE	Policy Nur	Policy Number:				
City State MARCO ISLAND Flori		Code I5	Company	NAIC Number		
SECTION C – BUILDING ELE	VATION INFORMAT	ION (SURVEY RE	QUIRED)			
C1. Building elevations are based on: Construction  *A new Elevation Certificate will be required when co  C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), Complete Items C2.a–h below according to the build Benchmark Utilized: TRIMBLE VRS - GPS NETWORD Indicate elevation datum used for the elevations in item.	nstruction of the buildin VE, V1–V30, V (with Bling diagram specified in RK Vertical Datum:	FE), AR, AR/A, AR/. n Item A7. In Puerto NAVD88	 AE, AR/A1-			
☐ NGVD 1929 ⊠ NAVD 1988 ☐ Other/S						
<ul> <li>Datum used for building elevations must be the same</li> <li>a) Top of bottom floor (including basement, crawlspane)</li> <li>b) Top of the next higher floor</li> <li>c) Bottom of the lowest horizontal structural member</li> </ul>	ace, or enclosure floor)			<u> </u>		
d) Attached garage (top of slab)			N/A ×	feet meters		
e) Lowest elevation of machinery or equipment serv (Describe type of equipment and location in Com	icing the building ments)			feet meters		
f) Lowest adjacent (finished) grade next to building	(LAG)		3.8 ×	feet meters		
g) Highest adjacent (finished) grade next to building	(HAG)		4.3 ×	feet meters		
<ul> <li>h) Lowest adjacent grade at lowest elevation of decl structural support</li> </ul>	k or stairs, including		3.8 ×	feet meters		
SECTION D – SURVEYOR,	ENGINEER, OR ARC	HITECT CERTIFI	CATION			
This certification is to be signed and sealed by a land sur I certify that the information on this Certificate represents statement may be punishable by fine or imprisonment und Were latitude and longitude in Section A provided by a lic	my best efforts to inter der 18 U.S. Code, Sec	pret the data availa tion 1001.	ble. I under 	ify elevation information.  stand that any false  eck here if attachments.		
Certifier's Name	License Number					
George W. Hackney	5606			W L		
Title Land Surveyor  Company Name Agnoli, Barber & Brundage, Inc.  Address 7400 Trail Boulevard, Suite 200			HEGIST	No. 5606 STATE OF  WARD SURVEY OR MININGER OF SURVEY OR MININGER OR		
City	State	ZIP Code	- 1/1	SURVEYOR		
Naples	Florida	34108		m <sub>muni</sub> .		
Signature  George W. Hackney  DN: E=George Hackney@abbinc.com, CN=George W. Hackney, O=*Agnoli, Barber & Brundage, Inc.*, L=Naples, S=Florida, C=US	Date 05-13-2021	Telephone (239) 597-3111	Ext. 241			
Copy all pages of this Elevation Date: 2021,05.26 12:21,28-0400	nts for (1) community of	ficial, (2) insurance a	agent/compa	any, and (3) building owner.		
Comments (including type of equipment and location, per C2(e), if applicable)  ABB PN 13-0080 Field Book 1232, Page 26.  Item C2e is the Raised A/C Unit Elevation. There are 9 engineered vents which represent 200 Sq.In. each (photos attached) and one 24" x 24" vent representing 576 Sq.In. (Photo attached).  At the time of issuance, this document had not been reviewed by the Local FEMA Officials. Their opinion should be sought prior to relying on this document as they are the final authority regarding the validity and sufficiency of this document.						

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

MP	PORTANT: In these spaces, copy the corres	ponding information	n from Section A.	FOR INSUR	ANCE COMPANY USE
	ilding Street Address (including Apt., Unit, Suit 1 BALD EAGLE DRIVE	te, and/or Bldg. No.) o	r P.O. Route and Box	No. Policy Numb	er:
City MA	y ARCO ISLAND	State Florida	ZIP Code 34145	Company NA	AIC Number
	SECTION E – BUILDIN FOR		ORMATION (SURVE NE A (WITHOUT BF		
con	r Zones AO and A (without BFE), complete Item pplete Sections A, B,and C. For Items E1–E4, er meters.				
E1.	<ul> <li>Provide elevation information for the followin the highest adjacent grade (HAG) and the logality and the logality of the following basement,</li> </ul>	west adjacent grade (		whether the elevation	ı is above or below
	crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet [	meters above	or Delow the HAG.
	crawlspace, or enclosure) is				or
E2.	<ul> <li>For Building Diagrams 6–9 with permanent fl the next higher floor (elevation C2.b in the diagrams) of the building is</li> </ul>	lood openings provide	ed in Section A Items 8	_ ` _	1–2 of Instructions), or ☐ below the HAG.
E3.	. Attached garage (top of slab) is			meters above	or Delow the HAG.
E4.	. Top of platform of machinery and/or equipme servicing the building is	ent	feet	meters above	or Delow the HAG.
E5.	. Zone AO only: If no flood depth number is av floodplain management ordinance?   Ye		the bottom floor elevate nown. The local officia		
	SECTION F - PROPERTY	Y OWNER (OR OWN	ER'S REPRESENTAT	TIVE) CERTIFICATIO	N
The con	e property owner or owner's authorized repres mmunity-issued BFE) or Zone AO must sign he	entative who complete ere. The statements ir	es Sections A, B, and n Sections A, B, and E	E for Zone A (without are correct to the bes	a FEMA-issued or st of my knowledge.
Pro	operty Owner or Owner's Authorized Represen	ntative's Name			
Add	dress		City	State	ZIP Code
Sig	gnature		Date	Telephone	
Cor	mments				
				☐ Ched	ck here if attachments.

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

MPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY US							
Building Street Address (including Apt., Unit, S 951 BALD EAGLE DRIVE	x No.	Policy Number:					
City MARCO ISLAND	State Florida	ZIP Code 34145		Company NAIC Number			
SECTION	ON G - COMMUNIT	TY INFORMATION (OPT	IONAL)				
The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.							
	engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation						
G2. A community official completed Sector Zone AO.	tion E for a building	located in Zone A (withoเ	ıt a FEMA	A-issued or community-issued BFE)			
G3. The following information (Items G4-	–G10) is provided fo	or community floodplain m	nanageme	ent purposes.			
G4. Permit Number	G5. Date Permit	Issued		Pate Certificate of Compliance/Occupancy Issued			
G7. This permit has been issued for:	New Construction	n   Substantial Improve	ment				
G8. Elevation of as-built lowest floor (including of the building:	ng basement) –		feet	meters Datum			
G9. BFE or (in Zone AO) depth of flooding at	the building site: _		feet	meters Datum			
G10. Community's design flood elevation:	-		feet	meters Datum			
Local Official's Name		Title Floodplai	in Coor	dinator			
Community Name		Telephone					
City of Marco island							
Signature		Date					
Comments (including type of equipment and lo	cation, per C2(e), if	applicable)					
(				<u> </u>			
RE\	/IEWED						
By K	elli DeFedericis	at 2:12 pm, Jun 02	2, 2021				
				Check here if attachments.			

**ELEVATION CERTIFICATE** 

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy	FOR INSURANCE COMPANY USE		
Building Street Address (including Ap 951 BALD EAGLE DRIVE	Policy Number:		
City MARCO ISLAND	State Florida	ZIP Code 34145	Company NAIC Number

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

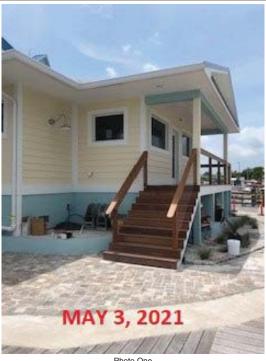


Photo One

Photo One Caption LEFT FRONT VIEW

Clear Photo One



Photo Two

Photo Two Caption LEFT SIDE VIEW (1 - 24"X24" VENT)

Clear Photo Two

**ELEVATION CERTIFICATE** 

**Continuation Page** 

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy	FOR INSURANCE COMPANY USE		
Building Street Address (including Ap 951 BALD EAGLE DRIVE	Policy Number:		
City	State	ZIP Code	Company NAIC Number
MARCO ISLAND	Florida	34145	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption RIGHT SIDE VIEW

Clear Photo Three



Photo Four

Photo Four Caption LEFT REAR VIEW (3 - FLOOD VENTS)

Clear Photo Four Form Page 6 of 6

**ELEVATION CERTIFICATE** 

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, cop	FOR INSURANCE COMPANY USE		
Building Street Address (including Ap 951 BALD EAGLE DRIVE	Policy Number:		
City	Company NAIC Number		
MARCO ISLAND	Florida	34145	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

2 - FLOOD VENTS Photo One Caption

Clear Photo One



Photo Two

Photo Two Caption 1 - FLOOD VENT

Clear Photo Two

**ELEVATION CERTIFICATE** 

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy	FOR INSURANCE COMPANY USE		
Building Street Address (including Ap 951 BALD EAGLE DRIVE	Policy Number:		
City	State	ZIP Code	Company NAIC Number
MARCO ISLAND	Florida	34145	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption 2 - FLOOD VENTS

Clear Photo Three



Photo Four

Photo Four Caption 1 - FLOOD VENT

Clear Photo Four
Form Page 6 of 6



Most Widely Accepted and Trusted

# **ICC-ES Evaluation Report**

ESR-2074

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

Reissued 02/2021 This report is subject to renewal 02/2023.

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 45— VENTS/FOUNDATION FLOOD VENTS

## **REPORT HOLDER:**

# **SMART VENT PRODUCTS, INC.**

### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS; MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514; FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



s use. n this

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



# **ICC-ES Evaluation Report**

**ESR-2074** 

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

**REPORT HOLDER:** 

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 EVALUATION SCOPE

## Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

### Properties evaluated:

- Physical operation
- Water flow

#### **2.0 USES**

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

## 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

## 3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

## 4.0 DESIGN AND INSTALLATION

## 4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

## 4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

## 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

#### 6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

#### 7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368

www.smartvent.com info@smartvent.com

TARI	E '	1M	ODE	L SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup>	1540-510	$15^3/_4$ " $\times 7^3/_4$ "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m<sup>2</sup>



FIGURE 1-SMART VENT: MODEL 1540-510

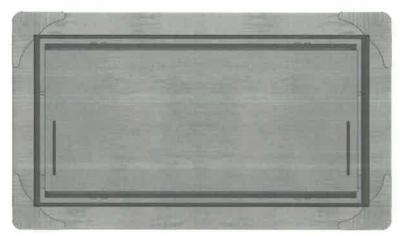


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

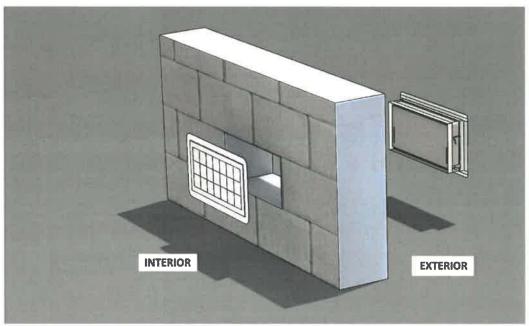


FIGURE 4—FLOOD VENT SEALING KIT



# **ICC-ES Evaluation Report**

# **ESR-2074 CBC and CRC Supplement**

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00---OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

## Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

#### Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

## 2.0 CONCLUSIONS

## 2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 *International Building Code®* (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

## 2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 *International Residential Code*® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021.





# **ICC-ES Evaluation Report**

# **ESR-2074 FBC Supplement**

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

**REPORT HOLDER:** 

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

## 2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the FRC, provided the design and installation are in accordance with the 2015 *International Building Code*® provisions noted in the evaluation report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2021.

