## U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

# **ELEVATION CERTIFICATE**

**Important:** Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION					RANCE COMPANY USE	
A1. Building Owner's Name VICTORIA NACARELLI and GRETCHEN KWASHNIK Policy Number:						
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Company NAIC Number: 993 FIELDSTONE DRIVE						
City MARCO ISLAND		State Florida		ZIP Code 34145		
A3. Property Description (Lot and Block Numbers, Ta LOT 16, BLOCK 184 OF MARCO BEACH UNIT S			•	•	R COUNTY, FLORIDA.	
A4. Building Use (e.g., Residential, Non-Residential,	Addition	, Accessory, e	etc.) RE	SIDENTIAL		
A5. Latitude/Longitude: Lat. N 25°55'28.56"	Long	W 81°43'29.	90" Horizontal I	Datum: NAD 1	927 × NAD 1983	
A6. Attach at least 2 photographs of the building if the	Certific	ate is being u	sed to obtain flood	insurance.		
A7. Building Diagram Number1B						
A8. For a building with a crawlspace or enclosure(s):						
a) Square footage of crawlspace or enclosure(s)			N/A sq ft			
b) Number of permanent flood openings in the cra	wlspace	e or enclosure	e(s) within 1.0 foot a	bove adjacent gra	ade N/A	
c) Total net area of flood openings in A8.b		N/A sq in				
d) Engineered flood openings?	0					
A9. For a building with an attached garage:						
a) Square footage of attached garage		472.00 sq ft				
b) Number of permanent flood openings in the att	ached g	arage within	1.0 foot above adja	cent grade 3		
c) Total net area of flood openings in A9.b		231.00*sq	in			
d) Engineered flood openings? X Yes N	0					
	SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION					
B1. NFIP Community Name & Community Number CITY OF MARCO ISLAND 120426  B2. County Name COLLIER  B3. State Florida						
B4. Map/Panel B5. Suffix B6. FIRM Index Date	Effe	RM Panel ective/	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, us	levation(s) e Base Flood Depth)	
12021C 0836 H 05-16-2012	05-16-2	vised Date 2012	AE		9.0'	
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:						
☐ FIS Profile ☑ FIRM ☐ Community Determined ☐ Other/Source:						
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/Source:						
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🗌 Yes 🗵 No						
Designation Date: CBRS OPA						

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 993 FIELDSTONE DRIVE	Policy Number:
City State ZIP Code MARCO ISLAND Florida 34145	Company NAIC Number
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY F	REQUIRED)
C1. Building elevations are based on: Construction Drawings* Building Under Const *A new Elevation Certificate will be required when construction of the building is complete.	
C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AI Complete Items C2.a–h below according to the building diagram specified in Item A7. In Pue Benchmark Utilized:  COL 12  Vertical Datum:  N.A.V.E Indicate elevation datum used for the elevations in items a) through h) below.	erto Rico only, enter meters.
☐ NGVD 1929 ☑ NAVD 1988 ☐ Other/Source:  Datum used for building elevations must be the same as that used for the BFE.	Charletha magaziramant usad
a) Top of bottom floor (including basement, crawlspace, or enclosure floor)	Check the measurement used.  11.1
b) Top of the next higher floor	N/A   ✓ feet   ✓ meters  N/A   ✓ feet   ✓ meters
c) Bottom of the lowest horizontal structural member (V Zones only)  d) Attached garage (top of slab)	7.6 × feet meters
e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments)  ———————————————————————————————————	11.1 × feet meters
f) Lowest adjacent (finished) grade next to building (LAG)	7.0 × feet meters
g) Highest adjacent (finished) grade next to building (HAG)	8.0 × feet meters
h) Lowest adjacent grade at lowest elevation of deck or stairs, including structural support	N/A ⊠ feet ☐ meters
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT CERTI	FICATION
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized I certify that the information on this Certificate represents my best efforts to interpret the data availablement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.	ilable. I understand that any false
Were latitude and longitude in Section A provided by a licensed land surveyor? 🗵 Yes 🗌 No	Check here if attachments.
Certifier's Name License Number DAVID C. HOLMAN (20.0315) PSM 6279	Check here if attachments.
Title LAND SURVEYOR  Company Name  David C by David C.	d ENTRICA A
Company Name A. TRIGO & ASSOCIATES, INC.  Address  Address  Address	<del>//</del>   - / · *
2223 TRADE CENTER WAY 06:26:09 -04'00	
City State ZIP Code NAPLES Florida 34109	Surveyor Surveyor
Signature Date Telephone 10-20-2021 (239) 594-8448	
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance	e agent/company, and (3) building owner.
Comments (including type of equipment and location, per C2(e), if applicable)  A9b. 3 SMART VENTS MODEL 1540-520, RATED AT 200 SQ. FT. EACH  C2e. LOWEST EQUIPMENT IS AIR CONDITIONER AND WATER HEATER AT ELEV. 11.1'  POOL EQUIPMENT IS AT ELEV. 7.6'  CROWN OF ROAD OPPOSITE WEST PROPERTY LINE = 4.48'  CROWN OF ROAD AT CENTERLINE INTERSECTION = 4.65'	

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

MPORTANT: In these spaces, copy the corresponding information from Section A.					
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 993 FIELDSTONE DRIVE					
tate ZIP Code lorida 34145		Company NAIC Number			
SECTION E – BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)					
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.  E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG).  a) Top of bottom floor (including basement, crawlspace, or enclosure) is					
Name					
City	Sta	te ZIP Code			
Date	Tele	ephone			
	tate ZIP Code 34145  EVATION INFORMATION (SUAO AND ZONE A (WITHOUT)  E5. If the Certificate is intended in a complete service and state	cor Bldg. No.) or P.O. Route and Box No.  Itate ZIP Code Sorida 34145  EVATION INFORMATION (SURVEY NOT FAO AND ZONE A (WITHOUT BFE)  E.E. If the Certificate is intended to support a litural grade, if available. Check the measurem check the appropriate boxes to show whether dijacent grade (LAG).			

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	FOR INSURANCE COMPANY USE				
Building Street Address (including Apt., Unit, St. 993 FIELDSTONE DRIVE					
City MARCO ISLAND	State Florida	ZIP Code 34145	Company NAIC Number		
SECTIO	N G – COMMUNITY IN	IFORMATION (OPTIO	NAL)		
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	Certificate. Complete th				
			gned and sealed by a licensed surveyor, cate the source and date of the elevation		
G2. A community official completed Secti or Zone AO.	on E for a building locat	ed in Zone A (without a	a FEMA-issued or community-issued BFE)		
G3. The following information (Items G4–	G10) is provided for cor	mmunity floodplain mar	nagement purposes.		
G4. Permit Number	G5. Date Permit Issue	ed	G6. Date Certificate of Compliance/Occupancy Issued		
G7. This permit has been issued for:	New Construction	Substantial Improvement	ent		
G8. Elevation of as-built lowest floor (including of the building:	basement)		feet meters		
G9. BFE or (in Zone AO) depth of flooding at t	he building site:		feet meters Datum		
G10. Community's design flood elevation:			feet meters Datum		
Local Official's Name		Title Floodplain Coo	rdinator		
Community Name City of marco Island		Telephone			
Signature		Date			
Comments (including type of equipment and loc	cation, per C2(e), if appl	icable)			
REVIEW	VED				
By Kelli Do	eFedericis at 1:41	pm, Oct 25, 2021			
			Check here if attachments.		

## **BUILDING PHOTOGRAPHS**

**ELEVATION CERTIFICATE** 

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, cop	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 993 FIELDSTONE DRIVE			Policy Number:
City	State	ZIP Code	Company NAIC Number
MARCO ISLAND	Florida	34145	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption FRONT VIEW 10/20/2021

Clear Photo One



Photo Two

Photo Two Caption LEFT SIDE VIEW 10/20/2021 Clear Photo Two

## **BUILDING PHOTOGRAPHS**

**ELEVATION CERTIFICATE** 

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

			-
IMPORTANT: In these spaces, copy	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt 993 FIELDSTONE DRIVE	o. Policy Number:		
City	State	ZIP Code	Company NAIC Number
MARCO ISLAND	Florida	34145	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption REAR VIEW 10/20/2021 Clear Photo Three



Photo Four

Photo Four Caption RIGHT SIDE VIEW 10/20/2021 Clear Photo Four



Most Widely Accepted and Trusted

# **ICC-ES Evaluation Report**

ESR-2074

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

Reissued 02/2021 This report is subject to renewal 02/2023.

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 45— VENTS/FOUNDATION FLOOD VENTS

## **REPORT HOLDER:**

# **SMART VENT PRODUCTS, INC.**

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS; MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514; FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



s use. n this

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



# **ICC-ES Evaluation Report**

**ESR-2074** 

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

**REPORT HOLDER:** 

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 EVALUATION SCOPE

## Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### **2.0 USES**

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

## 3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

## 4.0 DESIGN AND INSTALLATION

#### 4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

#### 4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

#### 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

#### 6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

#### 7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368

www.smartvent.com info@smartvent.com

TARI	E '	1M	ODE	L SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup>	1540-510	$15^3/_4$ " $\times 7^3/_4$ "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m<sup>2</sup>



FIGURE 1-SMART VENT: MODEL 1540-510

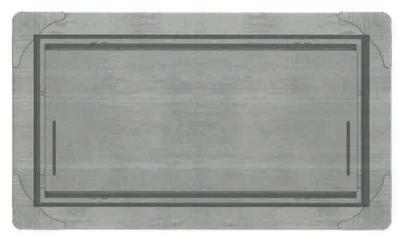


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

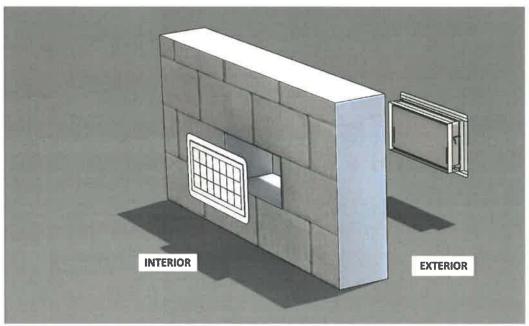


FIGURE 4—FLOOD VENT SEALING KIT



# **ICC-ES Evaluation Report**

# **ESR-2074 CBC and CRC Supplement**

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00---OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

## Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

#### Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

## 2.0 CONCLUSIONS

#### 2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 *International Building Code®* (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

## 2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 *International Residential Code*® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021.





# **ICC-ES Evaluation Report**

# **ESR-2074 FBC Supplement**

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

**REPORT HOLDER:** 

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

## 2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the FRC, provided the design and installation are in accordance with the 2015 *International Building Code*® provisions noted in the evaluation report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2021.

