# U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency

National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

# **ELEVATION CERTIFICATE**

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - F	ROPERTY INFOR	MATION		FOR INSUF	RANCE COMPANY USE			
A1. Building Owner's Name  Ronald S. Webster & Adrienne D. Webster  Policy Number:								
A2. Building Street Address (including Apt Box No. 200 Hideaway Circle N	Company N	AIC Number:						
City Marco Island		State Florida		ZIP Code 34145				
A3. Property Description (Lot and Block N Lot 10, Block 14, Hideaway Beach, as reco				,				
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) Residential								
A5. Latitude/Longitude: Lat. N25°57'36.1" Long. W81°44'50.9" Horizontal Datum: NAD 1927 X NAD 1983								
A6. Attach at least 2 photographs of the bu	uilding if the Certific	cate is being ι	sed to obtain floo	d insurance.				
A7. Building Diagram Number8								
A8. For a building with a crawlspace or en	closure(s):							
a) Square footage of crawlspace or er	nclosure(s)	3	1111.00 sq ft					
b) Number of permanent flood opening	gs in the crawlspac	e or enclosure	e(s) within 1.0 foot	above adjacent gra	ide 12			
c) Total net area of flood openings in A	48.b	3480.00 <sup>*</sup> sq in			-			
d) Engineered flood openings?	Yes 🗌 No							
A9. For a building with an attached garage:								
a) Square footage of attached garage		630.00 sq ft						
b) Number of permanent flood opening	gs in the attached g	arage within	1.0 foot above adj	acent grade 4				
c) Total net area of flood openings in A	\9.b	800.00 sq	in					
d) Engineered flood openings?	Yes No							
	- FLOOD INSURA			ORMATION				
B1. NFIP Community Name & Community City of Marco Island 120426		B2. County Collier	Name		B3. State Florida			
B4. Map/Panel B5. Suffix B6. FIRM Date	Effe	RM Panel ective/ vised Date	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)			
12021C0828 H 05-16-20 <sup>-7</sup>			AE	10				
	B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:  [ FIS Profile  FIRM  Community Determined  Other/Source: LOMR Case#18-04-5452P							
B11 Indicate elevation datum used for BF	E in Item B9: N	GVD 1929 [	⊠ NAVD 1988	Other/Source:				
B12. Is the building located in a Coastal Ba	arrier Resources Sy	ystem (CBRS	area or Otherwis	e Protected Area (C	PA)? ☐ Yes ⊠ No			
Designation Date:	CBRS	☐ OPA		,				

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPOR	TANT: In these spaces, copy the corresponding	information from Sec	ction A.	FOR IN	SURANC	E COMPANY USE
1	g Street Address (including Apt., Unit, Suite, and/or deaway Circle N	Bldg. No.) or P.O. Roเ	ite and Box No.	Policy N	lumber:	
City Marco	State Island Flori		Code 45	Compar	ny NAIC N	lumber
	SECTION C - BUILDING ELE	EVATION INFORMAT	TION (SURVEY RE	QUIRE	D)	
	Building elevations are based on: Construction A new Elevation Certificate will be required when co	- <u>-</u>	ding Under Constru	ction*	× Finish	ed Construction
( E	Elevations – Zones A1–A30, AE, AH, A (with BFE), N Complete Items C2.a–h below according to the build Benchmark Utilized: <u>AC</u> 3385	ing diagram specified in Vertical Datum:	in Ítem A7. In Puerto NAVD 88			
	ndicate elevation datum used for the elevations in ite NGVD 1929 🖂 NAVD 1988 🔲 Other/S	ource:				
[	Datum used for building elevations must be the same	e as that used for the E	BFE.	Chec	ck the mea	asurement used.
a	a) Top of bottom floor (including basement, crawlspa	ace, or enclosure floor	)	3.0	× feet	meters
ı	o) Top of the next higher floor			11.0	× feet	meters
	c) Bottom of the lowest horizontal structural member	(V Zones only)		N/A	× feet	meters
,	d) Attached garage (top of slab)			7.5	× feet	meters meters
6	<ul> <li>Lowest elevation of machinery or equipment serv (Describe type of equipment and location in Comi</li> </ul>	icing the building ments)	:=	11.0	× feet	meters
f	) Lowest adjacent (finished) grade next to building	(LAG)	=	3.0	× feet	meters
9	g) Highest adjacent (finished) grade next to building	(HAG)		7.5	× feet	meters
ŀ	<ul> <li>Lowest adjacent grade at lowest elevation of deci structural support</li> </ul>	c or stairs, including		N/A [	× feet	meters
	SECTION D – SURVEYOR,	ENGINEER, OR ARC	CHITECT CERTIFI	CATION		
l / certi	certification is to be signed and sealed by a land sun fy that the information on this Certificate represents ment may be punishable by fine or imprisonment und	my best efforts to inter	pret the data availa	law to ce ble. I und	ertify eleva lerstand ti	ation information. hat any false
Were	latitude and longitude in Section A provided by a lic	ensed land surveyor?	⊠ Yes □ No	С	heck here	e if attachments.
	ier's Name Pacetti	License Number 6916			OHN P	Mid to grant the same
Title Profe	ssional Surveyor and Mapper			-5	SPRT1F	
Comp	pany Name				No. 6	916,
	o Surveying & Mapping, LLC			- P	plute	ceth :
Addre 3205	ess Beck Boulevard			Office	STATE	OF SIDA
City Naple	es	State Florida	ZIP Code 34114		Su Su	rve) है। हैं है .
Signa	sture Gelle Pareth	Date 01-19-2020	Telephone (239) 389-0026	Ext.		
Сору	all pages of this Elevation Certificate and all attachmen	nts for (1) community of	ficial, (2) insurance a	agent/com	ipany, and	d (3) building owner.
A8a 8 sq/ft e 200 s at ele eleva WO #	nents (including type of equipment and location, per A9a Square footage was derived from architectural each and (1) 1,280 sq/in opening between the garage q/ft each. C2a is the crawlspace floor. C2b is the ma vation 9.2'. C2e is the A/C pad (NE. side). Local juristion shown hereon, consult applicable building departing the same of the same state of the	design plans. A8b is ( e and crawlspace. A9b in living floor. There is sdictions may have ele tment regarding any d	are Smart Vent, Mo an additional living vation requirements esign decisions.	odel #154 floor at 2 s more res	40-520, ce 2.8'. The strictive th	ertified to cover front entry area is nan the base flood

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	ng information from Sec	ction A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/o 200 Hideaway Circle N	or Bldg. No.) or P.O. Rou	ite and Box No.	Policy Number:
	tate ZIP lorida 3414	Code 45	Company NAIC Number
SECTION E – BUILDING ELE FOR ZONE	VATION INFORMATIO AO AND ZONE A (WIT	N (SURVEY NOT	REQUIRED)
For Zones AO and A (without BFE), complete Items E1–complete Sections A, B,and C. For Items E1–E4, use nate enter meters.	E5. If the Certificate is intural grade, if available.	tended to support a Check the measurer	ment used. In Puerto Rico only,
E1. Provide elevation information for the following and c the highest adjacent grade (HAG) and the lowest ad a) Top of bottom floor (including basement,	heck the appropriate box if acent grade (LAG).	es to show whether	r the elevation is above or below
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet meters	
crawlspace, or enclosure) is  E2. For Building Diagrams 6–9 with permanent flood ope	enings provided in Section	feet meters	
the next higher floor (elevation C2.b in the diagrams) of the building is	enings provided in Section	on A Items 8 and/or	_
E3. Attached garage (top of slab) is		feet meters	s above or below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is	·	☐ feet ☐ meters	s above or below the HAG.
E5. Zone AO only: If no flood depth number is available, floodplain management ordinance? Yes I	is the top of the bottom to Unknown. The	floor elevated in acc local official must o	cordance with the community's certify this information in Section G.
SECTION F - PROPERTY OWNE	ER (OR OWNER'S REPF	RESENTATIVE) CE	RTIFICATION
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	who completes Sections	A, B, and E for Zor A, B, and E are corr	ne A (without a FEMA-issued or rect to the best of my knowledge.
Property Owner or Owner's Authorized Representative's	Name		
Address	City	Sta	ate ZIP Code
Signature	Date	Tel	ephone
Comments			
			Check here if attachments.

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 200 Hideaway Circle N	Policy Number:
City State ZIP Code Marco Island Florida 34145	Company NAIC Number
SECTION G - COMMUNITY INFORMATION (OPTIONAL	)
The local official who is authorized by law or ordinance to administer the community's floodplain in Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and si used in Items G8–G10. In Puerto Rico only, enter meters.  G1. The information in Section C was taken from other documentation that has been signed engineer, or architect who is authorized by law to certify elevation information. (Indicate	gn below. Check the measurement and sealed by a licensed surveyor,
data in the Comments area below.)  G2. A community official completed Section E for a building located in Zone A (without a FE or Zone AO.	
G3. The following information (Items G4–G10) is provided for community floodplain manage	ment purposes.
G4. Permit Number G5. Date Permit Issued G6.	Date Certificate of Compliance/Occupancy Issued
G7. This permit has been issued for:  New Construction  Substantial Improvement	
G8. Elevation of as-built lowest floor (including basement) of the building:	et meters Datum
G9. BFE or (in Zone AO) depth of flooding at the building site:	et
	et  meters Datum
Local Official's Name  Title  Floodplain Coord	inator
Community Name Telephone City of Marco Island	
Signature Date	
Comments (including type of equipment and location, per C2(e), if applicable)	
* The state of the	
REVIEWED	
By Kelli DeFedericis at 2:07 pm, Feb 03, 2021	
	Check here if attachments.

#### **BUILDING PHOTOGRAPHS**

## **ELEVATION CERTIFICATE**

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, cop	FOR INSURANCE COMPANY USE		
Building Street Address (including A	Policy Number:		
200 Hideaway Circle N			
City	State	ZIP Code	Company NAIC Number
Marco Island	Florida	34145	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption : Front View (SE) on 12/14/2020

Clear Photo One



Photo Two

: Left Side View (SW) with (6) Flood Openings on 01/13/2020 Photo Two Caption

Clear Photo Two

## **BUILDING PHOTOGRAPHS**

## **ELEVATION CERTIFICATE**

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, cop	FOR INSURANCE COMPANY USE		
Building Street Address (including A 200 Hideaway Circle N	Policy Number:		
City	State	ZIP Code	Company NAIC Number
Marco Island	Florida	34145	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption: Rear View (NW) on 12/14/2020

Clear Photo Three



Photo Four Caption : Right Side View (NE) with A/C Pad & (4) Flood Openings on 12/14/2020

Clear Photo Four

Page 1 of 4 Case No.: 18-04-5452P LOMR-APP Issue Date: October 31, 2018 Effective Date: March 15, 2019



# Federal Emergency Management Agency

Washington, D.C. 20472

# LETTER OF MAP REVISION **DETERMINATION DOCUMENT**

COMMUNITY AND REVISION INFORMATION		PROJECT DESCRIPTION	BASIS OF REQUEST		
City of Marco Island Collier County Florida		NO PROJECT	COASTAL ANALYSIS UPDATED TOPOGRAPHIC DAT		
	COMMUNITY NO.: 120426				
IDENTIFIER Hideaway Beach & Associate Properties			APPROXIMATE LATITUDE AND LONGITUDE: 25.962, -81.746 SOURCE: Precision Mapping Streets DATUM: NAD 83		
	ANNOTATED MAPPING EN	ICLOSURES	ANNOTATED STUDY ENCLOSURES		
TYPE: FIRM* TYPE: FIRM*	NO.: 12021C0828H NO.: 12021C0810H	DATE: May 16, 2012 DATE: May 16, 2012	NO REVISION TO THE FLOOD INSURANCE STUDY REPORT		

Enclosures reflect changes to flooding sources affected by this revision. \* FIRM - Flood Insurance Rate Map

#### FLOODING SOURCE AND REVISED REACH

Gulf of Mexico to Collier Bay - an area centered at approximately 500 feet northwest of the intersection of South Beach Drive and Hideaway Circle North

SUMMARY OF REVISIONS					
Flooding Source	Effective Flooding	Revised Flooding	Increases	Decreases	
Gulf of Mexico to Collier Bay	Zone VE	Zone AE	NONE	YES	
	BFEs*	BFEs	NONE	YES	

<sup>\*</sup> BFEs - Base Flood Elevations

## **DETERMINATION**

This document provides the determination from the Department of Homeland Security's Federal Emergency Management Agency (FEMA) regarding a request for a Letter of Map Revision (LOMR) for the area described above. Using the information submitted, we have determined that a revision to the flood hazards depicted in the National Flood Insurance Program (NFIP) map is warranted. This document revises the effective NFIP map, as indicated in the attached documentation. Please use the enclosed annotated map panels revised by this LOMR for floodplain management purposes and for all flood insurance policies and renewals in your community.

This determination is based on the flood data presently available. The attached documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Information eXchange toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMC Clearinghouse, 3601 Eisenhower Avenue, Suite 500, Alexandria, VA 22304-6426. Additional information about the NFIP is available on our website at https://www.fema.gov/national-flood-insurance-program.

> Patrick "Rick" F. Sacbibit, P.E., Branch Chief Engineering Services Branch

Case No.: 18-04-5452P



# Federal Emergency Management Agency

Washington, D.C. 20472

# LETTER OF MAP REVISION DETERMINATION DOCUMENT (CONTINUED)

#### **COMMUNITY INFORMATION**

#### APPLICABLE NFIP REGULATIONS/COMMUNITY OBLIGATION

We have made this determination pursuant to Section 206 of the Flood Disaster Protection Act of 1973 (P.L. 93-234) and in accordance with the National Flood Insurance Act of 1968, as amended (Title XIII of the Housing and Urban Development Act of 1968, P.L. 90-448), 42 U.S.C. 4001-4128, and 44 CFR Part 65. Pursuant to Section 1361 of the National Flood Insurance Act of 1968, as amended, communities participating in the NFIP are required to adopt and enforce floodplain management regulations that meet or exceed NFIP criteria. These criteria, including adoption of the FIS report and FIRM, and the modifications made by this LOMR, are the minimum requirements for continued NFIP participation and do not supersede more stringent State/Commonwealth or local requirements to which the regulations apply.

#### **COMMUNITY REMINDERS**

We based this determination on the 1-percent-annual-chance stillwater elevations computed in the FIS for your community. A comprehensive restudy of your community's flood hazards could establish greater flood hazards in this area.

Your community must regulate all proposed floodplain development and ensure that permits required by Federal and/or State/Commonwealth law have been obtained. State/Commonwealth or community officials, based on knowledge of local conditions and in the interest of safety, may set higher standards for construction or may limit development in floodplain areas. If your State/Commonwealth or community has adopted more restrictive or comprehensive floodplain management criteria, those criteria take precedence over the minimum NFIP requirements.

We will not print and distribute this LOMR to primary users, such as local insurance agents or mortgage lenders; instead, the community will serve as a repository for the new data. We encourage you to disseminate the information in this LOMR by preparing a news release for publication in your community's newspaper that describes the revision and explains how your community will provide the data and help interpret the NFIP maps. In that way, interested persons, such as property owners, insurance agents, and mortgage lenders, can benefit from the information.

We have designated a Consultation Coordination Officer (CCO) to assist your community. The CCO will be the primary liaison between your community and FEMA. For information regarding your CCO, please contact:

Mr. Jesse Munoz
Director, Mitigation Division
Federal Emergency Management Agency, Region IV
Koger Center - Rutgers Building, 3003 Chamblee Tucker Road
Atlanta, GA 30341
(770)-220-5406

This determination is based on the flood data presently available. The attached documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Information eXchange toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMC Clearinghouse, 3601 Eisenhower Avenue, Suite 500, Alexandria, VA 22304-6426. Additional information about the NFIP is available on our website at <a href="https://www.fema.gov/national-flood-insurance-program">https://www.fema.gov/national-flood-insurance-program</a>.

Patrick "Rick" F. Sacbibit, P.E., Branch Chief Engineering Services Branch

Issue Date: October 31, 2018

Effective Date: March 15, 2019

Case No.: 18-04-5452P

LOMR-APP



# Federal Emergency Management Agency

Washington, D.C. 20472

# LETTER OF MAP REVISION DETERMINATION DOCUMENT (CONTINUED)

#### STATUS OF THE COMMUNITY NFIP MAPS

We will not physically revise and republish the FIRM for your community to reflect the modifications made by this LOMR at this time. When changes to the previously cited FIRM panels warrant physical revision and republication in the future, we will incorporate the modifications made by this LOMR at that time.

This determination is based on the flood data presently available. The attached documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Information eXchange toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMC Clearinghouse, 3601 Eisenhower Avenue, Suite 500, Alexandria, VA 22304-6426. Additional information about the NFIP is available on our website at <a href="https://www.fema.gov/national-flood-insurance-program">https://www.fema.gov/national-flood-insurance-program</a>.

Patrick "Rick" F. Sacbibit, P.E., Branch Chief Engineering Services Branch

Issue Date: October 31, 2018

Effective Date: March 15, 2019

Case No.: 18-04-5452P

LOMR-APP



# Federal Emergency Management Agency

Washington, D.C. 20472

# LETTER OF MAP REVISION DETERMINATION DOCUMENT (CONTINUED)

#### **PUBLIC NOTIFICATION OF REVISION**

A notice of changes will be published in the *Federal Register*. This information also will be published in your local newspaper on or about the dates listed below, and through FEMA's Flood Hazard Mapping website at <a href="https://www.floodmaps.fema.gov/fhm/bfe">https://www.floodmaps.fema.gov/fhm/bfe</a> status/bfe main.asp

LOCAL NEWSPAPER


Name: Naples Daily News


Dates: November 8, 2018 and November 15, 2018

Within 90 days of the second publication in the local newspaper, any interested party may request that we reconsider this determination. Any request for reconsideration must be based on scientific or technical data. Therefore, this letter will be effective only after the 90-day appeal period has elapsed and we have resolved any appeals that we receive during this appeal period. Until this LOMR is effective, the revised flood hazard determination presented in this LOMR may be changed.

This determination is based on the flood data presently available. The attached documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Information eXchange toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMC Clearinghouse, 3601 Eisenhower Avenue, Suite 500, Alexandria, VA 22304-6426. Additional information about the NFIP is available on our website at <a href="https://www.fema.gov/national-flood-insurance-program">https://www.fema.gov/national-flood-insurance-program</a>.

Patrick "Rick" F. Sacbibit, P.E., Branch Chief Engineering Services Branch

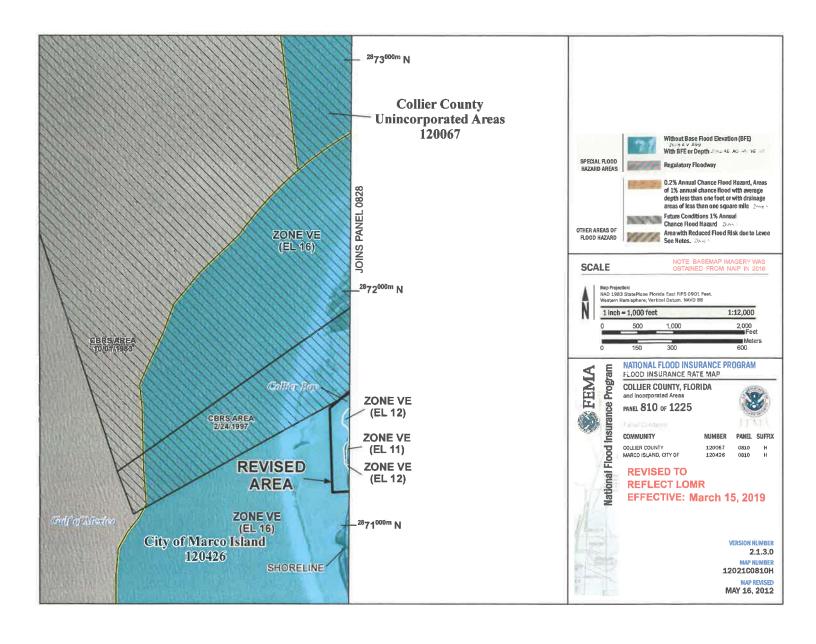

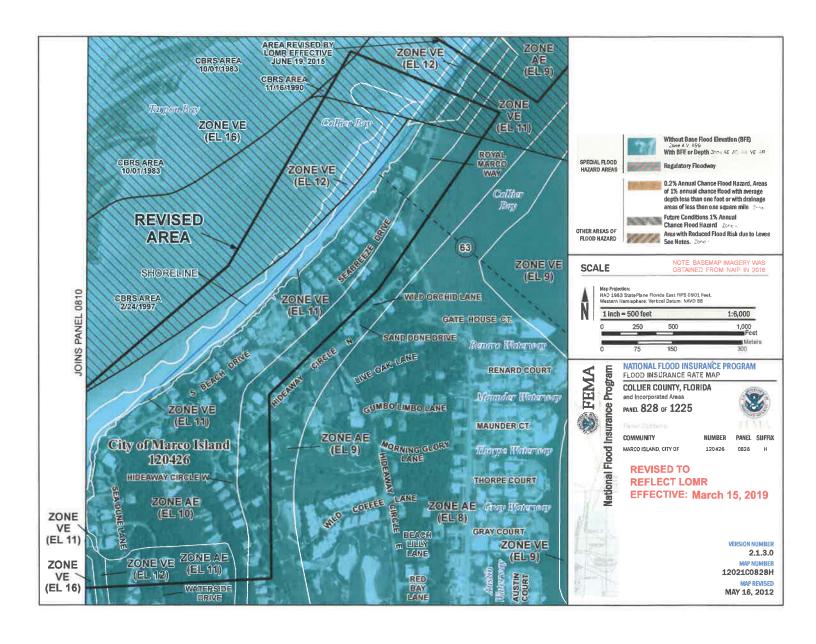



Most Widely Accepted and Trusted

# **ICC-ES Evaluation Report**

ESR-2074

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

Reissued 02/2021 This report is subject to renewal 02/2023.

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 45— VENTS/FOUNDATION FLOOD VENTS

#### **REPORT HOLDER:**

# **SMART VENT PRODUCTS, INC.**

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS; MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514; FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



s use. n this

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



# **ICC-ES Evaluation Report**

**ESR-2074** 

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

**REPORT HOLDER:** 

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### **2.0 USES**

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

#### 3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

#### 4.0 DESIGN AND INSTALLATION

#### 4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

#### 4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

#### 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

#### **6.0 EVIDENCE SUBMITTED**

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

#### 7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368

www.smartvent.com info@smartvent.com

TABI	E	1_	_M	OD	FI	SI	7FS

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT®	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent <sup>®</sup> Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m<sup>2</sup>



FIGURE 1-SMART VENT: MODEL 1540-510

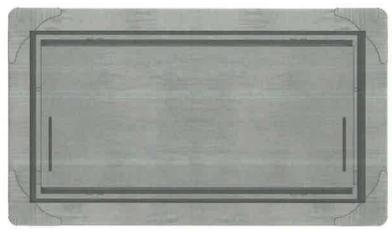


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

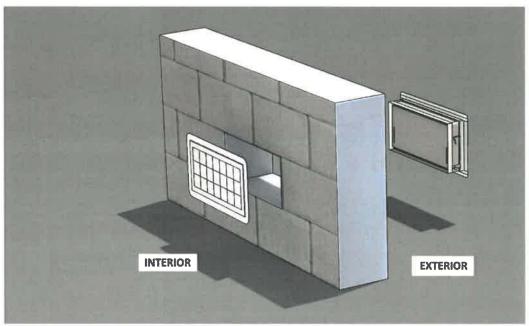


FIGURE 4—FLOOD VENT SEALING KIT



## **ICC-ES Evaluation Report**

## **ESR-2074 CBC and CRC Supplement**

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00---OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

#### Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

#### 2.0 CONCLUSIONS

#### 2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 *International Building Code®* (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

#### 2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 *International Residential Code*® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021.





# **ICC-ES Evaluation Report**

## **ESR-2074 FBC Supplement**

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

**REPORT HOLDER:** 

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

#### 2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the FRC, provided the design and installation are in accordance with the 2015 *International Building Code*® provisions noted in the evaluation report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2021.

