U.S. DEPARTMENT OF HOMELAND SECURITY

Federal Emergency Management Agency National Flood Insurance Program OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SF	CTION A - PROPERT			ny omolal, (2) moor		RANCE COMPANY USE	
A1. Building Owner's Name				Policy Num			
IAN and VIVIENNE SMITH						501.	
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 420 EDGEWATER COURT Company NAIC Number:							
City							
MARCO ISLAND Florida 34145							
A3. Property Description (Lo LOT 17, BLOCK 254 OF						COUNTY, FLORIDA.	
A4. Building Use (e.g., Resid	lential, Non-Residential,	, Addition	, Accessory,	etc.) RE	SIDENTIAL		
A5. Latitude/Longitude: Lat	N 25°56'34.04"	Long	W 81°43'29.	57" Horizonta	I Datum: NAD	1927 🗵 NAD 1983	
A6. Attach at least 2 photogr	aphs of the building if th	ne Certific	cate is being i	used to obtain floo	d insurance.		
A7. Building Diagram Numbe	r <u>1B</u>						
A8. For a building with a cray	vlspace or enclosure(s):	:					
a) Square footage of cra	wlspace or enclosure(s)		N/A sq ft			
b) Number of permanent	flood openings in the co	rawlspac	e or enclosur	e(s) within 1.0 foot	above adjacent gra	ade N/A	
c) Total net area of flood	openings in A8.b		N/A sq ir	1		(
	d) Engineered flood openings? Yes No						
A9. For a building with an atta	ched garage:						
No.			573.00 sq ff				
a) Square footage of attached garage 573.00 sq ft b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade 3							
c) Total net area of flood openings in A9.b sq in							
d) Engineered flood openings? Yes No							
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION							
B1. NFIP Community Name 8			B2. County	Name		B3. State	
CITY OF MARCO ISLA	ND 120426			COLLIER		Florida	
B4. Map/Panel B5. Suffix Number	B6. FIRM Index Date	Effe	RM Panel ective/	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)	
12021C 0828 H 05-16-2012 Revised Date 05-16-2012 AE 8.0'							
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:							
☐ FIS Profile ☑ FIRM ☐ Community Determined ☐ Other/Source:							
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 X NAVD 1988 Other/Source:							
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Yes No							
Designation Date: CBRS OPA							
GONG _ GIA							

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	ng information from	Section A.	FOR INSU	RANCE	COMPANY USE
Building Street Address (including Apt., Unit, Suite, and 420 EDGEWATER COURT	or Bldg. No.) or P.O. F	Route and Box No.	Policy Nur	nber:	
City	tate Z	IP Code	Company	NAIC N	umber
MARCO ISLAND Florida 34145					
SECTION C – BUILDING E	LEVATION INFORM	IATION (SURVEY RE	EQUIRED)		
C1. Building elevations are based on: Construct *A new Elevation Certificate will be required when C2. Elevations – Zones A1–A30, AE, AH, A (with BFE Complete Items C2.a–h below according to the best Benchmark Utilized: COL 14 Indicate elevation datum used for the elevations in NGVD 1929 NAVD 1988 Other Datum used for building elevations must be the set a) Top of bottom floor (including basement, crawled) b) Top of the next higher floor c) Bottom of the lowest horizontal structural mem d) Attached garage (top of slab) e) Lowest elevation of machinery or equipment so (Describe type of equipment and location in Color of the lowest adjacent (finished) grade next to building the properties of the prope	construction of the building diagram specific Vertical Datum items a) through h) bur/Source: ume as that used for the space, or enclosure flower (V Zones only) ervicing the building omments)	n BFE), AR, AR/A, AR/ ed in Item A7. In Puert um: N.A.V.D. elow.	Check 9.1 N/A	the mea feet feet feet feet	
g) Highest adjacent (finished) grade next to build	na (HAC)		6.9	feet	meters
h) Lowest adjacent grade at lowest elevation of d structural support	3,	ĵ		feet	meters
SECTION D – SURVEYO	R, ENGINEER, OR A	RCHITECT CERTIFI	CATION		
This certification is to be signed and sealed by a land sealed to a land sealed by a land sealed to be sealed by a land sealed by	surveyor, engineer, or ats my best efforts to in under 18 U.S. Code, S	architect authorized by nterpret the data availa Section 1001.	law to cert	stand th	at any false
Certifier's Name	License Number			.,,,,,,,,,	111111111
DAVID C. HOLMAN (21.0228) Title LAND SURVEYOR Company Name A. TRIGO & ASSOCIATES, INC.	David C	Digitally signed by David C. Holman	Che Re	D C CERTI No.	HOLMANIA FICATA
	Holmar	Date: 2021.07.21	= 7	STAT	TE OF
Address 2223 TRADE CENTER WAY		11:49:47 -04'00'	egiste	·. ~ 10	RIDA
City NAPLES	State Florida	ZIP Code 34109	Tilling	o Sur	ORIDA . MO
Signature.	Date 07-20-2021	Telephone (239) 594-8448	Ext.		
copy all pages of this Elevation Certificate and all attachn	nents for (1) community	official, (2) insurance a	gent/compa	nv. and	(3) building owner.
Comments (including type of equipment and location, p A9b. 3 SMART VENTS MODEL 1540-520 RATED A C2e. LOWEST EQUIPMENT IS AIR CONDITIONER POOL EQUIPMENT AT ELEV. 4.0' NOTE: THERE IS A STORAGE AREA UNDER AN 8.5' THE FLOOR ELEV. OF THE AREA IS 3.7' AND THERI OPENINGS OF 740 SQ. INCHES.	er C2(e), if applicable) AT 200 SQ. FT. EACH R AT ELEV. 9.1' X 22.6' RAISED DEC	K AT THE REAR OF T	HE HOUSE	=	

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 420 EDGEWATER COURT			Policy Number:			
		Code 145	Company NAIC Number			
SECTION E – BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)						
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters. E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement.						
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet meter				
crawlspace, or enclosure) is E2. For Building Diagrams 6–9 with permanent flood open the port bigher floor (algorithm C2 h in	enings provided in Sect	feet meter meter				
the next higher floor (elevation C2.b in the diagrams) of the building is E3. Attached garage (top of slab) is		feet meter				
E4. Top of platform of machinery and/or equipment servicing the building is		feet meter				
E5. Zone AO only: If no flood depth number is available,	is the top of the botton	n floor elevated in ac				
SECTION F – PROPERTY OWNE	R (OR OWNER'S REF	PRESENTATIVE) CE	ERTIFICATION			
The property owner or owner's authorized representative who completes Sections A, B, and E for Zone A (without a FEMA-issued or community-issued BFE) or Zone AO must sign here. The statements in Sections A, B, and E are correct to the best of my knowledge.						
Property Owner or Owner's Authorized Representative's I	Name					
Address	City	Sta	ate ZIP Code			
Signature	Date	Te	lephone			
Comments			☐ Check here if attachments.			
			Check here if attachments.			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and E 420 EDGEWATER COURT	lox No. Policy Number:					
City State ZIP Code MARCO ISLAND Florida 34145	Company NAIC Number					
SECTION G - COMMUNITY INFORMATION (OF	TIONAL)					
The local official who is authorized by law or ordinance to administer the community's floor Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(used in Items G8-G10. In Puerto Rico only, enter meters.						
G1. The information in Section C was taken from other documentation that has bee engineer, or architect who is authorized by law to certify elevation information. (data in the Comments area below.)						
G2. A community official completed Section E for a building located in Zone A (with or Zone AO.	out a FEMA-issued or community-issued BFE)					
G3. The following information (Items G4–G10) is provided for community floodplain	management purposes.					
G4. Permit Number G5. Date Permit Issued	G6. Date Certificate of Compliance/Occupancy Issued					
G7. This permit has been issued for: New Construction Substantial Improv	/ement					
G8. Elevation of as-built lowest floor (including basement) of the building:	feet meters Datum					
G9. BFE or (in Zone AO) depth of flooding at the building site:	☐ feet ☐ meters Datum					
G10. Community's design flood elevation:	☐ feet ☐ meters Datum					
Local Official's Name Title Floodplain Coordinator						
Community Name Telephone City of Marco Island						
Signature Date						
Comments (including type of equipment and location, per C2(e), if applicable)						
t of the second						
DEVIEWED						
REVIEWED By KDeFedericis at 11:23 am, Aug	02 2021					
by RDeredencis at 11.23 ani, Aug	02, 2021					
	Check here if attachments.					

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, cop	FOR INSURANCE COMPANY USE		
Building Street Address (including A 420 EDGEWATER COURT	Policy Number:		
City	State	ZIP Code	Company NAIC Number
MARCO ISLAND	Florida	34145	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption FRONT VIEW 07/20/2021

Clear Photo One



FEMA Form 086-0-33 (12/19)

Photo Two Caption

Replaces all previous editions.

Clear Photo Two Form Page 5 of 6



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ESR-2074

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

Reissued 02/2021 This report is subject to renewal 02/2023.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 45— VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS; MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514; FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"

A Subsidiary of CODE COUNCIL

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-2074

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368

www.smartvent.com info@smartvent.com

TAB	11 6	1_	MIC	IDE	 IZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT [®]	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT [®]	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

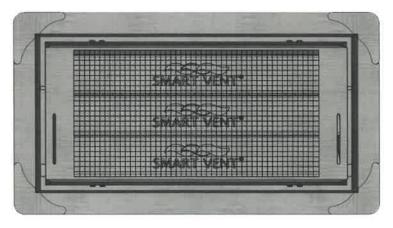


FIGURE 1-SMART VENT: MODEL 1540-510

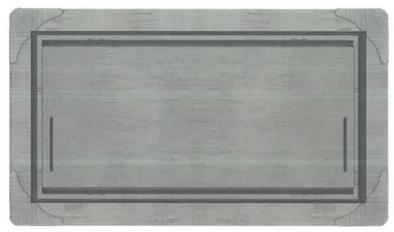


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

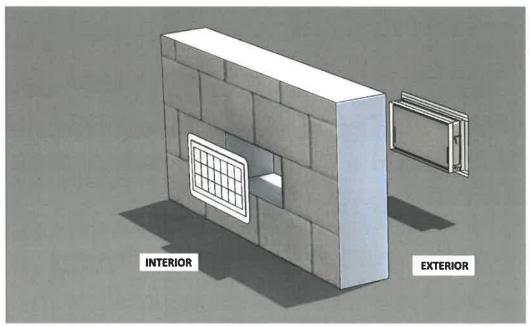


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00---OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 *International Building Code®* (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 *International Residential Code*® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021.





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the FRC, provided the design and installation are in accordance with the 2015 *International Building Code*® provisions noted in the evaluation report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2021.



BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, cop	FOR INSURANCE COMPANY USE		
Building Street Address (including A 420 EDGEWATER COURT	Policy Number:		
City	State	ZIP Code	Company NAIC Number
MARCO ISLAND	Florida	34145	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

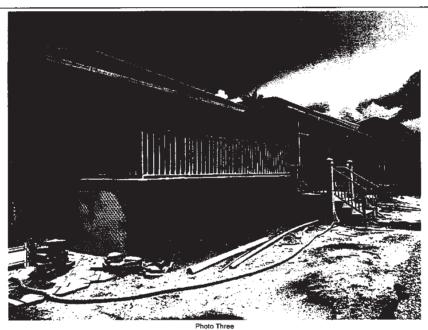


Photo Three Caption REAR VIEW 07/20/2021 Clear Photo Three

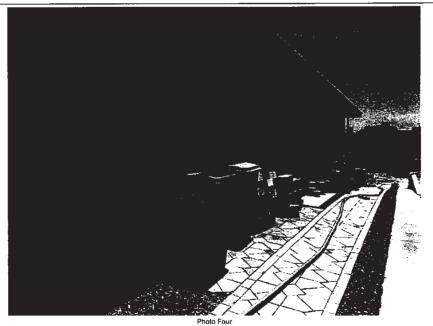


Photo Four Caption R

RIGHT SIDE VIEW 07/20/2021

12012021

Clear Photo Four Form Page 6 of 6