#948093

## **ELEVATION CERTIFICATE**

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No 3067-0077 Expires May 31, 1993

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A P	ROPERTY INFO	ORMATION	. 1	500 00000000000000000000000000000000000				
BUILDING OWNER'S NAME	FOR INSURANCE COMPANY USE							
KARL W. AND JUTTA I. M	POLICY NUMBER							
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg	COMPANY NAIC NUMBER							
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	•		N:	TO NOT THE MEMBER				
LOT 2, BLOCK 395, MARC	O BEACH	IINTT 12						
CITY	O BEACH,	ONII IZ	15.					
MARCO ISLAND, FLORIDA			STATE	ZIP CODE				
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION								
Provide the following from the proper FIRM (See Instructions):								
1. COMMUNITY NUMBER 2. PANEL NUMBER	J. SUFFIX	1 2177 00 00	٠.					
120067 0803	Е	4 DATE OF FIRM INDEX 08/03/92	5. FIRM ZONE AE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)  11.0				
7. Indicate the elevation datum system used on 8. For Zones A or V, where no BFE is provided	the FIRM for Ba	ise Flood Elevations (BES	N. YNGVD 120	- 04				
				this building site indicate				
8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7)								
		NG ELEVATIÓN INFORM						
1. Using the Elevation Certificate Instructions in	dicate the disce							
Using the Elevation Cartificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best								
2(a). FIRM Zones A1-A30, AE, AH, and A (with	BEE) The ton	of the reference level floor	from the selecte	d diagram is at an elevation				
The horror of the leavest have								
toot MCVD /as ash a first								
The first as the relation of the relationship in the section of th								
below (check one) the highest grade adjacent to the building.								
(d). FIRM Zone AO. The floor used as the refe	rence level from	the selected diagram is	i i i i i i foot ab	and Combatan Communication				
(d). FIRM Zone AO. The floor used as the reference level from the selected diagram is feet above or below (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's flood depth number is available.								
Was the Community's Hoodplain management ordinance?								
- All Cievation (delum system lised in determining the short								
under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations is the datum used on								
equation under Comments on Page 2.)								
4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4)								
5. The reference level elevation is based on:								
case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)								
6. The elevation of the lowest grade immediately adjacent to the building is: 6 • 90     feet NGVD (or other FIRM datum-see Section 8, Item 7).								
SECTION D COMMUNITY INFORMATION								
1. If the community official responsible for verifying building								
1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:								
floor" as defined by the ordinance is:								
2. Date of the start of construction or substantial improvement								
			*					


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME JOHN GENEVRINO, P.L	.S. #4085	ENSE NUMBER (or Affix S	Seal)		
PRESIDENT	COMPANY NAME ACTION SURVEYS AND	PLANNERS,	INC.		
ADDRESS 269 AIRPORT ROAD	NAPLES, FLORIDA 33			STATE	ZIP
SIGNATURE Sommeron	SEPTEMBER 23, 1994	DATE	813-643-	7510	
Copies should be made of this Certifi	cate for: 1) community official, 2	insurance agent/c	ompany, and	3) building own	er.
COMMENTS:					
	•	The second secon			
		4,			

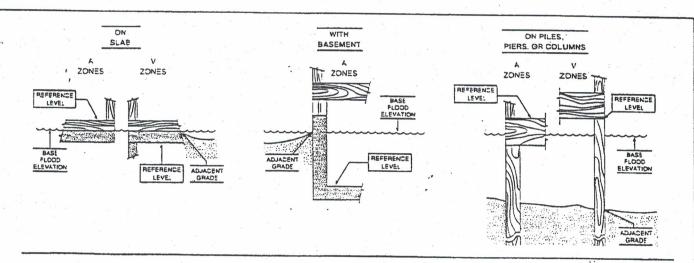

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.