



The World Leader in Lightning Prediction and Warning Systems

ThorMobile

ALERT STATUS CONDITION

- All Clear** – DI 0.0...Area is safe.
- Caution** – DI 0.0-2.3...Be alert, the atmosphere may be in flux.
- Warning** – DI 2.4-2.9...The energy is changing in the atmosphere, but it may be passing by. Monitor the DI value.
- Red Alert** – DI 3.0+...Safety is compromised.

LHL – Lightning Hazard Level

Percentage chance of lightning / amount of energy within your outer range (default is 12 miles)

DI – Dynamic Index

Percentage chance of lightning / amount of energy change within your inner range (default is 2 miles)

AD – Activity Detector

Time since last discharge / lightning strike. Will count down from 10. At zero, an All Clear will be signaled.

NAME & DATA STATUS


Display of the Thor Guard Name Site Name and display of the Thor Guard Data Status (either Live or Old)

ENERGY BAR

Most recent status of energy level.
Yellow – Positive Energy
Red – Negative Energy

FCC – Field Collapse Counter

This represents the number of discharges within outer range (default is 12 miles). A quickly increasing number may indicate a fast approaching storm.

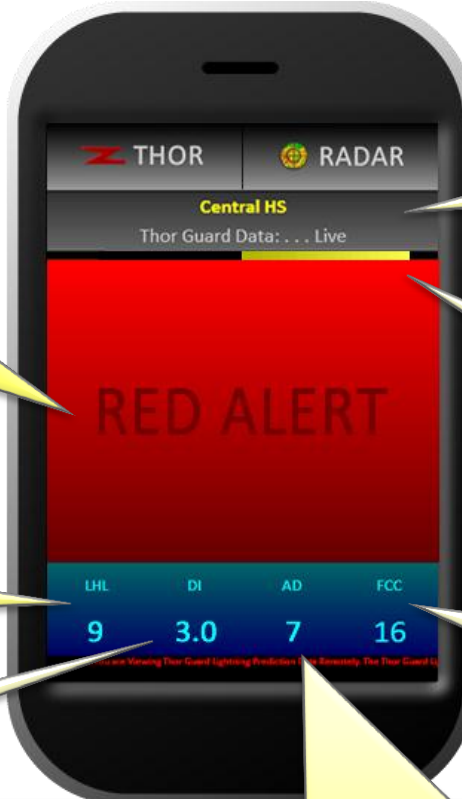



The World Leader in Lightning Prediction and Warning Systems

Dynamic Index Graph

